








Examine all packaging material for small parts that may have come loose during shipment. Periodic checks are recommended to insure that all components are in proper position, tight and free from damage. Keep this assembly instruction for future reference. Adult assembly is required. The product of Hillsdale Furniture, LLC is designed for residential use only. Customer Service Phone Number: 502-562-0000



### HARDWARE LIST

- A (4) 1/4" x 1/2" Allen Bolts  
B (4) 1/4" x 2-1/4" Allen Bolts  
C (4) 1/4" x 1" Allen Bolts  
D (8) 1/4" Hex Nuts  
E (12) 1/4" Flat Washers  
F (1) 1/4" Open Wrench  
G (1) 1/4" Allen Wrench

### PARTS LIST

- H (2) Leg Extensions  
I (1) Headboard  
J (1) Adapter Plates  
K (4) Finials

PART	QTY	HARDWARE	PART	QTY	HARDWARE
A	4		B	4	
C	4		D	8	
E	12		F	1	
G	1				

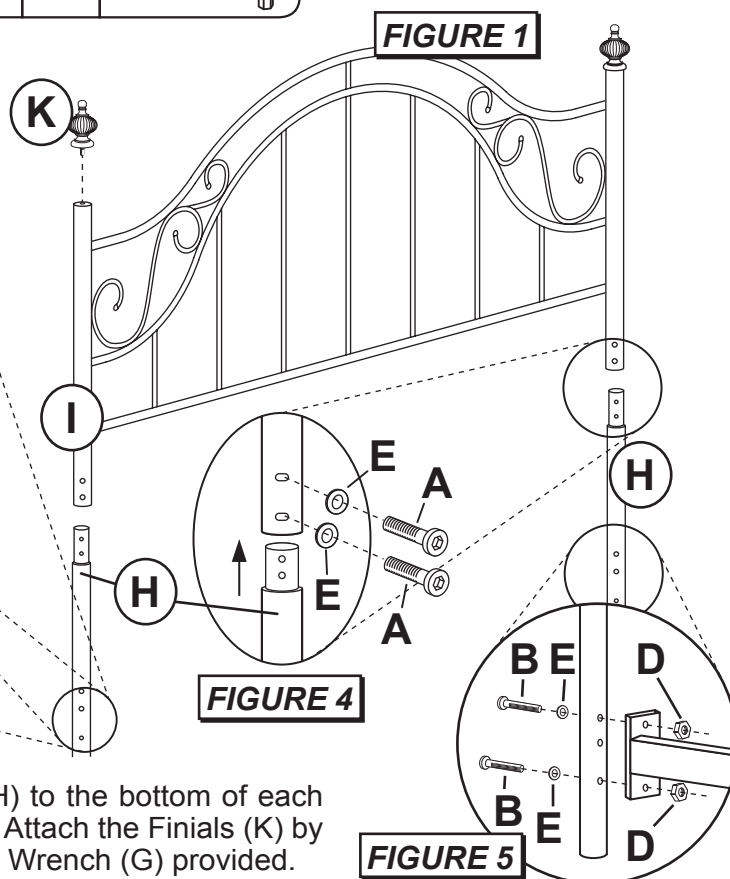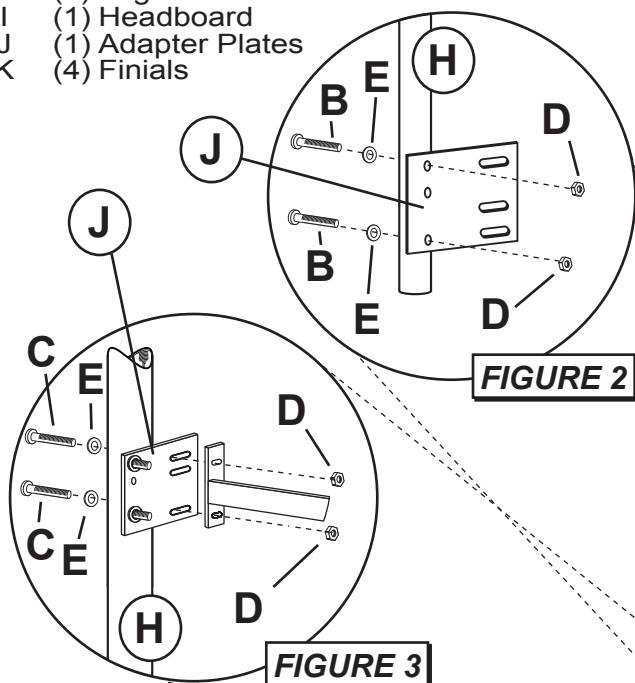

### STEP 1 - Figures 1 and 4

Begin assembly by first attaching each Leg Extension (H) to the bottom of each post (I), using 2 Allen Bolts (A) and 2 Metal Washers (E). Attach the Finials (K) by screwing them into place. Tighten all bolts using the Allen Wrench (G) provided.

### STEP 2 - Figure 5 - Queen Size Only

Next, attach the Bed Frame (Not Included) to each Leg Extension (H) using 2 Allen Bolts (B) and 2 Metal Washers (E) from the backside, & 2 Hex Nuts (D) per each post. Tighten all bolts using the Open Wrench & Allen Wrench (F & G). The assembly is now complete.

### STEP 3 - Figure 2 - Full Size Only

Attach each Adapter Plate (J) to each Leg Extension (H) using 2 Allen Bolts (B) and 2 Metal Washers (E) from the backside, and 2 Hex Nuts (D) per each side. Tighten all bolts and nuts using the Open Wrench (F) and Allen Wrench (G) provided.

### STEP 4 - Figure 3 - Full Size Only

Once in place, secure the Bed Frame (Not Included) to each Adapter Plate (J) using 2 Allen Bolts (C) and 2 Metal Washers (E) from the backside, and 2 Hex Nuts (D) from the front per each plate. Tighten all bolts and nuts using the Open Wrench (F) and Allen Wrench (G) provided. The assembly is now complete.