



Kenmore 30-Inch Self-Clean Sealed Double Oven Gas Range

○ White 22-75422

● Stainless with Porcelain Surface 22-75423

● Stainless with Stainless Surface 22-75443

● Black 22-75429

- 2.3 cu. ft. upper and 3.6 cu. ft. lower self-clean ovens
- True convection with third element (lower oven)
- Five sealed burners on a recessed porcelain cooktop (75443: stainless cooktop)
- One 18,000 BTU Turbo Boil® Flex power burner
- One 14,200 BTU power burner
- One 10,000 BTU all-purpose, oval burner
- One 9,500 BTU all-purpose burner
- One 5,000 BTU simmer burner
- Porcelain-coated, cast-iron, dishwasher-safe, continuous grates
- Oven control lockout
- Easy Set™ 615 electronic oven controls
- Certified Sabbath mode
- 3 porcelain coated, integrated handle racks (1 upper, 2 lower)
- Glass doors with large windows (both ovens) (75423 and 75443: stainless doors)
- Cast metal knobs

Model	22-75422	22-75423	22-75443	22-75429
Overall	White	Stainless	Stainless	Black
Console	White	Stainless	Stainless	Black
Knobs	White	Stainless	Stainless	Black
Door	White	Stainless	Stainless	Black
Drawer	White	Stainless	Stainless	Black
Handle	White	Stainless	Stainless	Black
Sides	White	Black	Black	Black
Surface	White	Black	Stainless	Black
Matte Grates	Black	Black	Black	Black

SELECTION	KENMORE ELITE
White	22-75422
Stainless with Porcelain Surface	22-75423
Stainless with Stainless Surface	22-75443
Black	22-75429
OVEN FEATURES	SELF-CLEAN
Oven Capacity (cu. ft.)	2.3 Upper Oven 3.6 Lower Oven
Variable Time Self-Cleaning	2-4 Hours
Electronic Oven Controls with Lockout	Easy Set™ 615
Slow Cook	Both Ovens
Electronic Clock & Timer	•
Add-1-Minute Timer	•
Warm & Hold Oven	Both Ovens
Automatic Oven Shutoff	•
Delay Start	Cook & Clean
Hidden Bake Element	Both Ovens
Sabbath Mode†	Certified
Convection Oven	Third Element (Lower)
Variable Broiling System	Four-Pass Low/High (Upper) 400-500° (Lower)
Total Adjustable Oven Racks	3
Integrated Handle Racks	Porcelain Coated, 1 Upper, 2 Lower
Oven Lights	Interior, Auto & Manual (Both Ovens)
Removable Doors	•
Window	Large (Both Ovens)
Main Oven Interior W x H x D (in.)	24 1/8 x 13 3/16 x 19 1/2
Auxiliary Oven Interior W x H x D (in.)	24 1/8 x 8 3/8 x 19 7/16
COOKTOP FEATURES	
Power Burner (BTU)	1 @ 18,000 Turbo Boil® Flex, 1 @ 14,200
All-Purpose Burner (BTU)	1 Oval @ 10,000, 1 @ 9,500
Simmer Burner (BTU)	1 @ 5,000
Grate Styling	Continuous
Porcelain-Coated Cast-Iron Grates	•
Dishwasher-Safe Grates	•
Cast Metal Knobs	•
Cooktop Surface	Recessed Porcelain (75443: Stainless)
GENERAL FEATURES	
Electronic Ignition	•
Natural Gas Bake / Broil (BTU / Hr.)	Upper: 11,500 / 10,000 Lower: 12,500 / —
LP Gas Bake / Broil (BTU / Hr.)	Upper: 11,500 / 10,000 Lower: 12,500 / —
Item Weight (Approx. Lbs.)	256
Shipping Weight (Approx. Lbs.)	280
ACCESSORIES	
Gas Connector Required – Stainless Steel; 60" Length 1/2" I.D.	22-49694
WARRANTY	
1-Year Limited Warranty – Entire Appliance	Parts & Labor

If used for other than private family purposes, warranty applies for only 90 days.  
†Sabbath Mode overrides auto oven shutoff

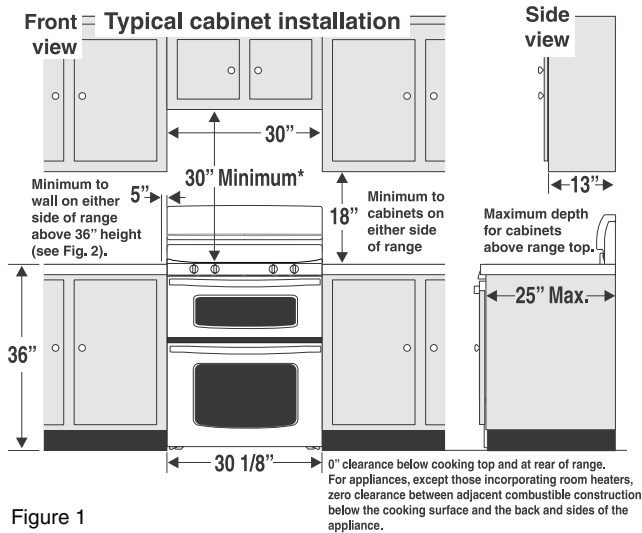


Figure 1

### Installation beside wall

If installing beside a wall, the minimum distance to combustible wall on either side of range above 36" height.

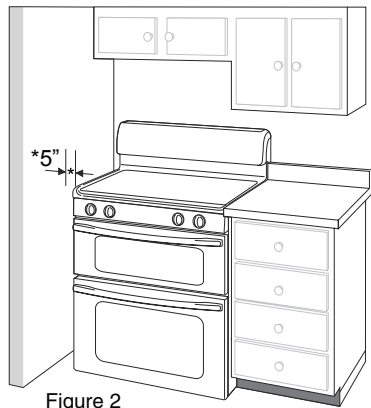


Figure 2



All ranges are equipped with an Anti-Tip device. The installation of this device is an important, required step in the installation of the range.

All electronic ignition gas products require a properly grounded 3-hole outlet with standard 120 volt, 60 Hz, AC household current.



Gas Connector—Stainless Steel  
22-49694 60" Length 1/2" I.D.

\* 30" minimum clearance between the top of the cooking surface and the bottom of an unprotected wood or metal cabinet; or 24" minimum when bottom of wood or metal cabinet is protected by not less than 1/4" flame retardant millboard covered with not less than no. 28 MSG sheet steel, 0.015" stainless steel, 0.024" aluminum or 0.020" copper. The minimum clearance is 0" for the rear of the range. Follow all dimension requirements provided above to prevent property damage, potential fire hazard, and incorrect countertop and cabinet cuts.

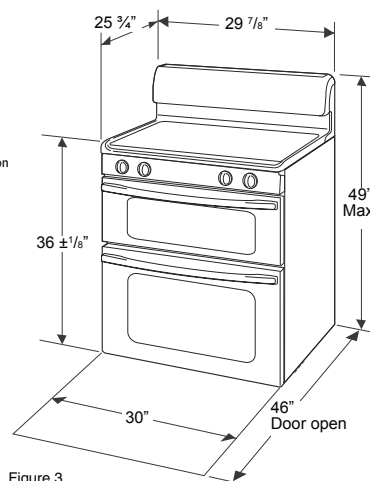


Figure 3

**NOTE:**  
The electric outlet can be placed anywhere in the hatched area.

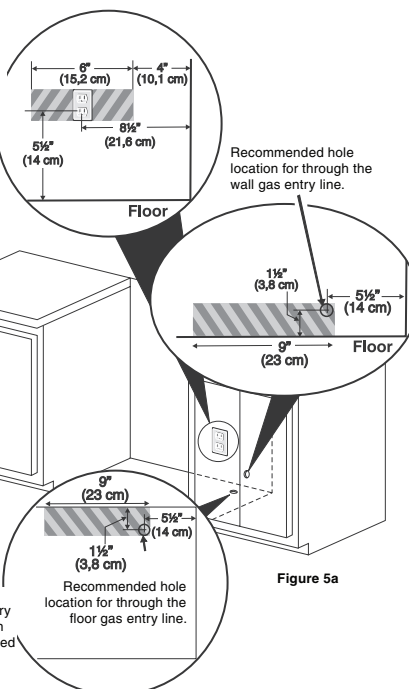


Figure 5a

**NOTE:**  
The gas entry line hole can be also placed anywhere in the hatched area.