Lot:_		
DO.		





# Mantel Assembly Instructions Model # G8600 Silverton Fireplace

# **▲** WARNINGS **▲**

Read entire label and all instructions included with gel fuel and fireplace.
PROPERTY DAMAGE, SERIOUS INJURY OR DEATH may result if these warnings are not followed.

#### HAZARDS

- Gel Fuel is flammable. Failure to follow warnings can result in property damage or serious burns.
- Real Flame® fireplaces have been designed and tested for use with Real Flame® Gel Cans only. Do not use any other brand of fuel, or flammable materials in the product.
- Do not attempt to remove, replace or fill a can while it is burning or still hot. Pouring any kind of fuel on a fire can result in flare-ups or flashbacks. Make sure the fire is out and allow the can to cool for 20 minutes before touching it.
- Do not store or use gasoline or other flammable materials, including gel fuel, near this product. Vapors or leaks could travel to sources of flame or heat and increase the risk of fire or explosion.

In case of an emergency use a CO2 extinguisher or baking soda to extinguish the fire.

- 1. Burn only Real Flame® 13oz Gel Cans in the log set. Only Real Flame® Gel Cans have been tested and approved for use in this log set. Never burn any other fuel or trash, paper, or wood.
- 2. Never alter or dismantle the metal firebox in any manner.
- 3. Make sure the fireplace is placed on a flat and level surface. Failure to do so could cause the product to tip, resulting in property damage or serious injury. Do not place the fireplace in an area with lots of traffic, such as a hallway or entryway.
- 4. Do not pour or scoop gel out of the can or try to combine gel from different cans.
- 5. Light Real Flame® gel fuel cans only when placed in the designated areas in firebox. Wipe up spills. Use a long match or extended butane lighter to ignite fuel.
- 6. Do not let anyone below age 18 use this fireplace. Never leave a fire unattended. Keep children and pets away from a burning unit.
- 7. Never touch any logs or metal surfaces during or immediately after burning gel fuel. They will be extremely HOT. Allow surfaces to cool for 20 minutes before touching, changing cans, or moving the unit.
- 8. Do not wear flammable or loose clothing when operating the fireplace. Do not lean over the unit when lighting.
- 9. Do not place more than 100 lbs. of weight on the top of the fireplace at anytime.
- 10. Exercise the same precautions you would with any open fire.

# Users are responsible for following these instructions and operating this product safely.

	and operating the product of the same of	
Using your Fireplace	<ul> <li>Fireplace is designed to be used indoors.</li> <li>Before using unit, be sure you have read and understood the step-by-step instructions in this manual.</li> <li>After several burns, soot may develop on the inside of the firebox. Clean with a damp soapy rag.</li> <li>During the initial burn you may experience a slight odor. Odor is temporary and will be absent on following burns.</li> </ul>	RF Mantle WARNINGS 061913
GEL FUEL	Real Flame® Gel Fuel contains isopropyl alcohol.  Avoid contact with eyes, mucous membranes or prolonged contact with skin. May irritate eyes. Store in a cool, dry place. Keep away from flame, heat or items that spark. Use in well-ventilated areas. Keep out of reach of children and pets. In case of fire, use a CO2 fire extinguisher or baking soda.	
FIDCT AID	If fuel gets in eyes, flush with water for 15 minutes; get medical attention. If ingested	J,


FIRST AID

If fuel gets in eyes, flush with water for 15 minutes; get medical attention. If ingested, do not induce vomiting; call poison control center or a doctor.

If you have questions please call customer service at: 1-800-654-1704

## PARTS LIST






Number	Desc ription	Black	Dark Mahogany	White	Quantity
1	Base Panel	86000101JW	86000501JW	86000801JW	1
2	Left Side Panel	86000102JW	86000502JW	86000802JW	1
3	Ri ght Side Panel	86000103JW	86000503JW	86000803JW	1
4	Left Front Panel	86000104JW	86000504JW	86000804JW	1
5	Ri ght Front Panel	86000105JW	86000505JW	86000805JW	1
6	Center Panel	86000106JW	86000506JW	86000806JW	1
7	Top Pane I	86000107JW	86000507JW	86000807JW	1
8	Left Firebox Trim	86000108JW	86000508JW	86000808JW	1
9	Ri ght Firebox Trim	86000109JW	86000509JW	86000809JW	1
10	Lower Firebox Trim	86000110JW	86000510JW	86000810JW	1
11	Upper Firebox Trim	86000111JW	86000511JW	86000811JW	1
12	Firebox Support	86000012JW	86000012JW	86000012JW	1
13	Hardware Kit	86000013JW	86000013JW	86000013JW	1

HARDWARE KIT-86000013 JW				
A x 24	B x 12	C x 22		
Short Allen Screw	L-Bracket	Long Allen Screw		
D x 22	E x 1	F x 2		
Washer	Allen Wrench	MDF Board		


## Step One

- -Join left side panel (2) with left front panel (4) by securing 6 short allen screws (A) through 3 L-brackets (B).
- -Repeat with right side panel (3) and right front panel (5).

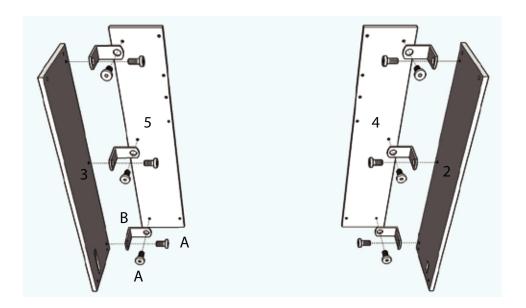


## Step Two

- -Set base panel (1) on a flat surface as shown.
- -Join panel (2) & (4), (3) & (5) by securing 8 short allen screws (A) through 4 L-brackets (B).

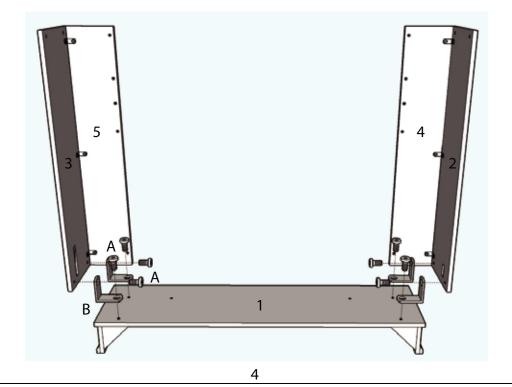


#### **Step Three**

- -Attach left firebox trim (8) to left front panel (4) by securing 2 long allen screws (C) through 2 washers (D). Fit on base panel (1) by securing 2 short allen screws (C) through 1 L-bracket (B).
- -Repeat with right firebox trim (9).

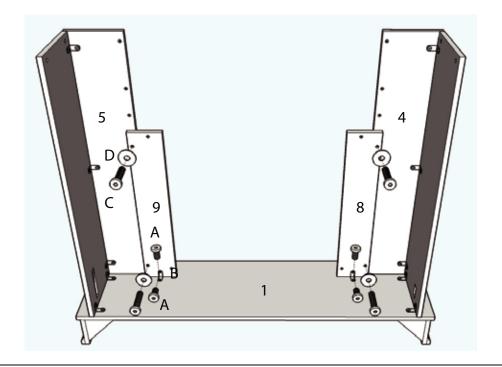


#### **Step Four**

- -Attach lower firebox trim (10) to side firebox trim (8), (9) by securing 2 long allen screws (C) through 2 washers (D).
- -Attach upper firebox trim (11) to front panel (4), (5) by securing 2 long allen screws (C) through 2 washers (D). Fit on side firebox trim (8), (9) by securing 4 long allen screws (C) through 4 washers (D) and 2 MDF boards (F).

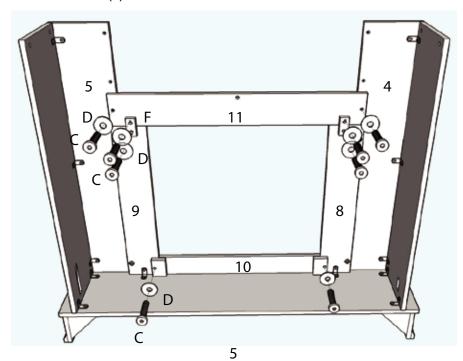


#### Step Five

-Attach center panel (6) to front panel (4), (5) by securing 4 long allen screws (C) through 4 washers (D). Fit on upper firebox trim (11) by securing 1 long allen screw (C) through 1 washer (D).

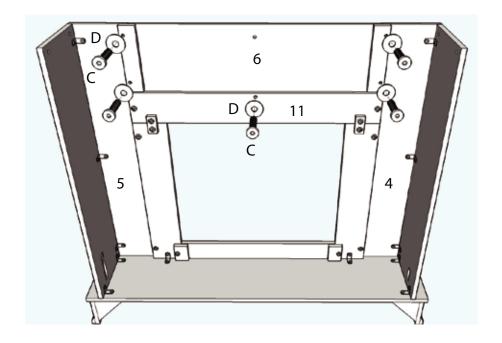


## Step Six

-Locate top panel (7) to above finished parts. Join center panel (6), side panel (2), (3) by securing 5 long allen screws (C) through 5 washers (D).

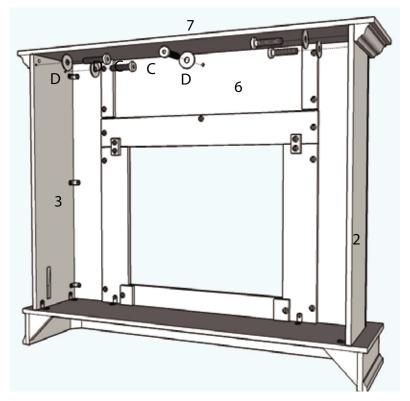

#### Step Seven

-Insert firebox support (12) to the hole on left side panel (2). Slide down the other side along the groove on right side panel (3).

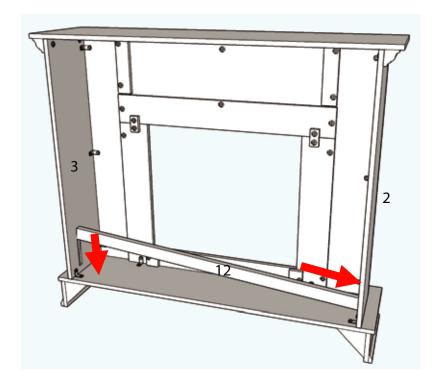

#### Step Eight

For next step reference the instruction manual included with your firebox.

If you do not have an instruction manual included with your firebox do not attempt to assemble or operate. Immediately call our customer service department at 1-800-654-1704 for a replacement manual.

WARNING: Do not operate your firebox without reading all instructions and warnings prior to use.

# Warranty & Return Policies

#### Warranty

Real Flame® Company warrants Real Flame ventless fireplaces and accessories to be free from defects in parts and workmanship under normal use and service for a period of 90 days from the date of purchase. In the event of such defects Real Flame will, at its option, replace the defective product or refund the purchase price. The foregoing is the exclusive remedy and Real Flame disclaims all other warranties, including any implied warranty of merchantability or fitness for a particular purpose. In addition, Real Flame will not be responsible for consequential damages in excess of the purchase price of the product on which such liability is based. Electric fireplaces carry a one-year warranty on the electric firebox only.

#### **Return Policy**

You may return your purchase within 90 days of receipt. No refunds will be issued for incomplete or unauthorized returns. All returned products must be 100% complete, adequately packaged in original packaging and in resalable condition. Products that have been assembled or modified will not be eligible for return. All items must be returned in their entirety, meaning all items included must be returned together. No returns or exchanges on discontinued items. Please begin the return process by contacting the store or company where you bought your Real Flame item.

#### **Replacement Parts**

In the event that an item has been lost or damaged, either by the manufacturer or in shipping, you may request a replacement. Replacement parts are not available for all units and only given at Real Flame's discretion. We will assess any damage and find a solution, which could include shipping you a replacement. No replacements are available for discontinued items or repackaged (open box) products. Please call Real Flame Customer Service at 800-654-1704 for replacement parts before returning the damaged item. Please have the following information (which can be found in your instruction manual) ready before you call Customer Service.

- Model Number of Item
- 4-8 digit Part Number
- Lot Code Number
- Shipping Address
- A picture of the damaged item may be requested. Pictures should be sent to custserv@realflame.com

#### **Incorrect Order Received**

If you received something other than what you ordered, please contact Real Flame Customer Service at 800-654-1704 within 48 hours of receiving the item.

Please refer to www.Realflame.com for our complete return guidelines and policies.

Real Flame® 7800 Northwestern Ave. Racine, WI 53403

Customer Service: 1-800-654-1704 in USA Service à la clientèle: 1-800-363-6443 in Canada custserv@realflame.com