



# RHINO-RACK

Aerodynamic & Heavy Duty Roof Rack Systems


## Rhino Master Fit Luggage Boxes

RHINOMF400, RHINOMF440, RHINOMF550, RHINOMFB440, RHINOMFB550


Place these instructions in the vehicle's glove box after installation is complete.

**Important:** Please read these instructions carefully prior to installation.  
Please refer to your fitting instruction to ensure that the roof racks are installed in the correct locations.  
Check the contents of kit before commencing fitment and report any discrepancies

### Layout

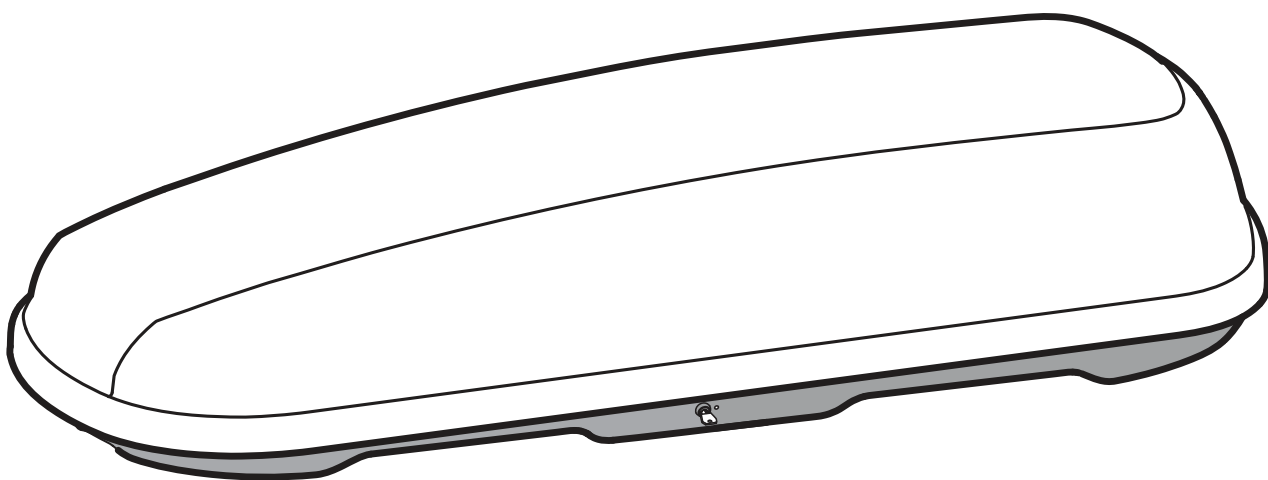

Record your key number here  
for future reference, in case of  
misplaced or lost keys





### Parts List

Maximum luggage box load carrying capacity: 75kg

Item	Component Name	Qty
1	Key	2
2	Claw	4
3	Strap	2
4	Fitting Instruction	RR252

**Tools Required**  
Measuring tape


**NOTE:** Before using your luggage box on a journey, make sure the box is securely mounted on the racks and the lid is properly closed and locked with the key.

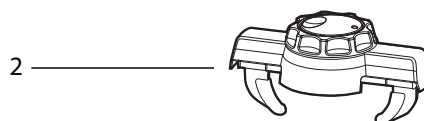




# Rhino Master Fit Luggage Boxes

1

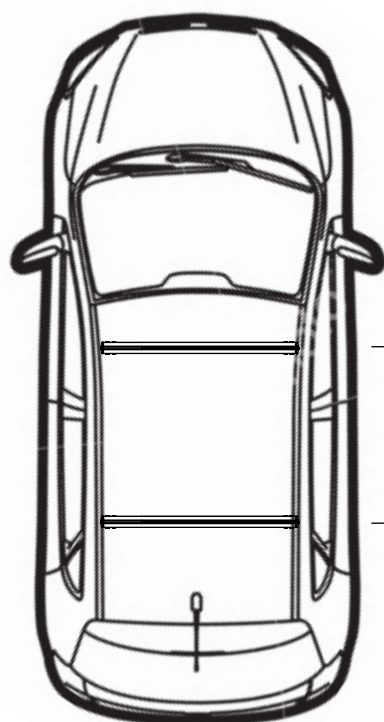

Distance measured from  
bar centre to bar centre



Refer below

RHINOMF400

MIN 640 mm


MAX 815 mm

RHINOMF440, RHINOMF550,  
RHINOMFB440, RHINOMFB550


MIN 620 mm

MAX 930 mm


RHINO AERO/SPORTZ

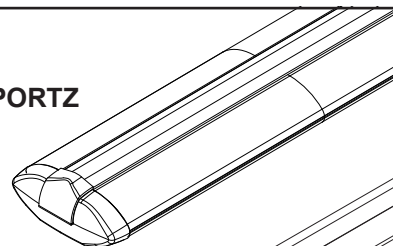


ROLA BAR

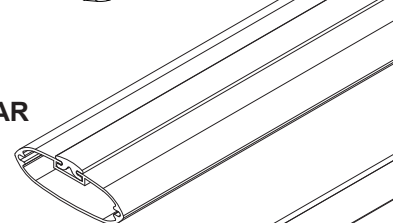



THULE AERO

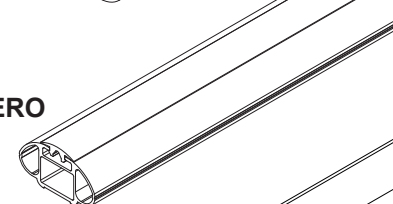

EUROPEAN






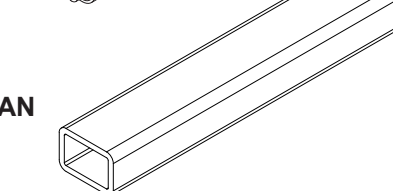


2

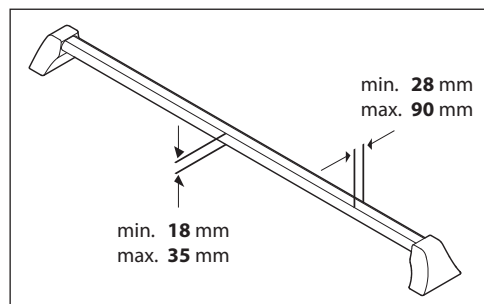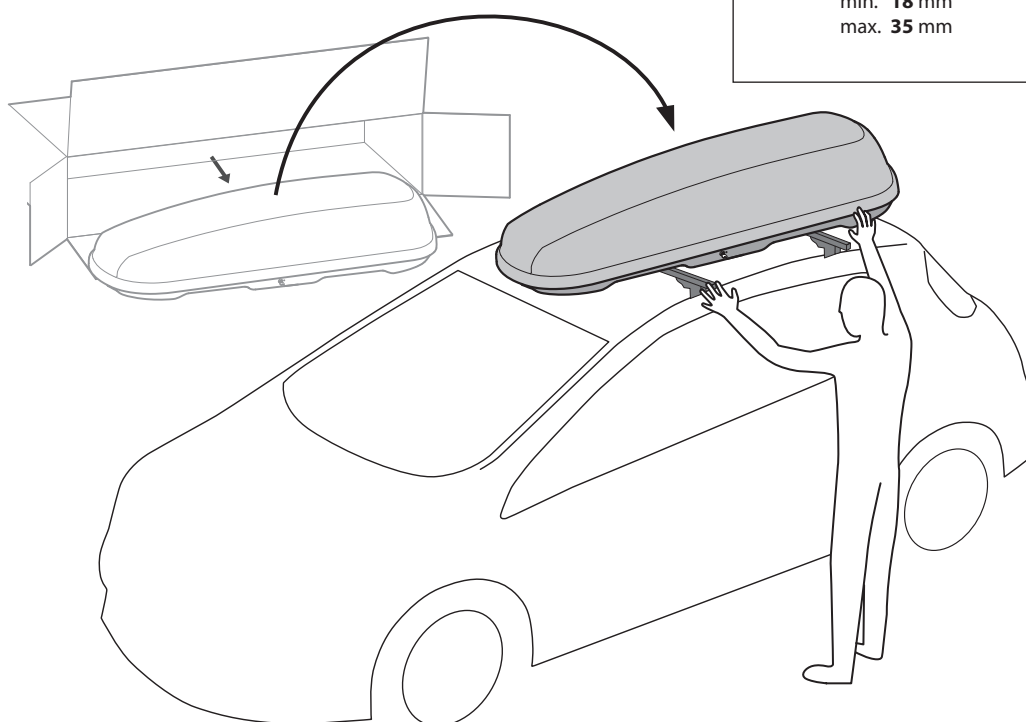




## Rhino Master Fit Luggage Boxes

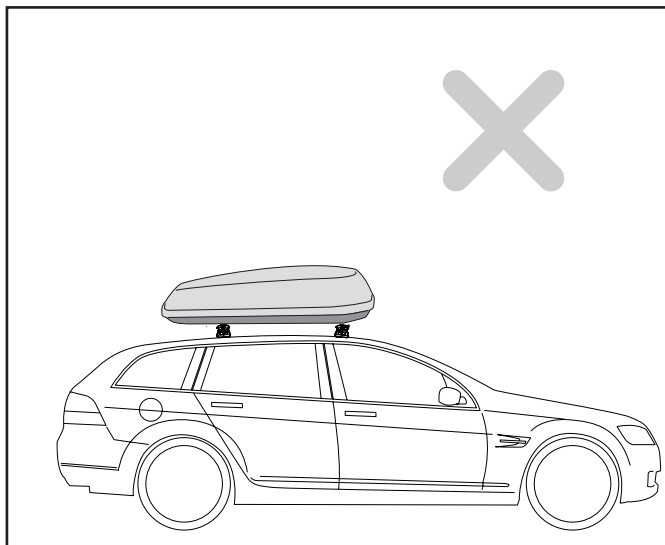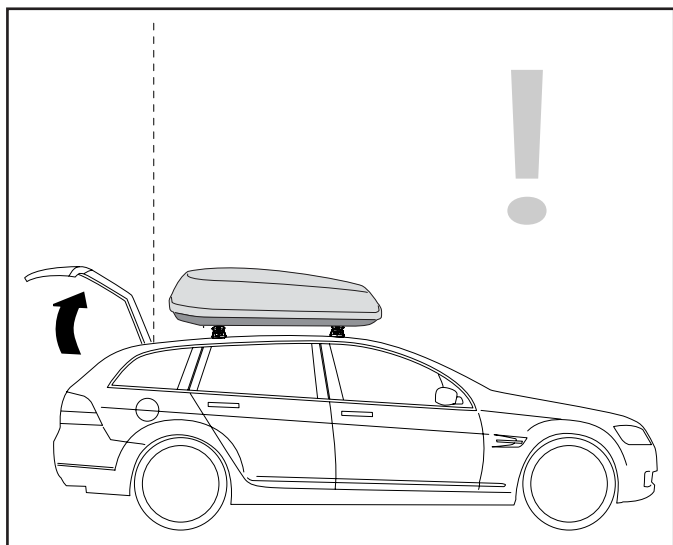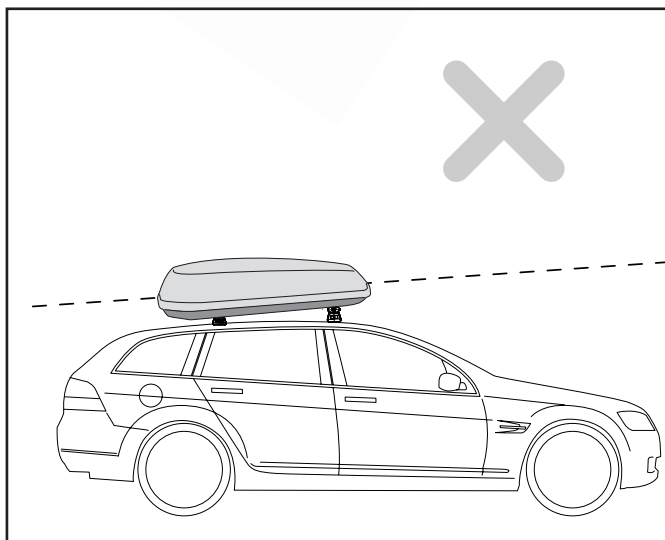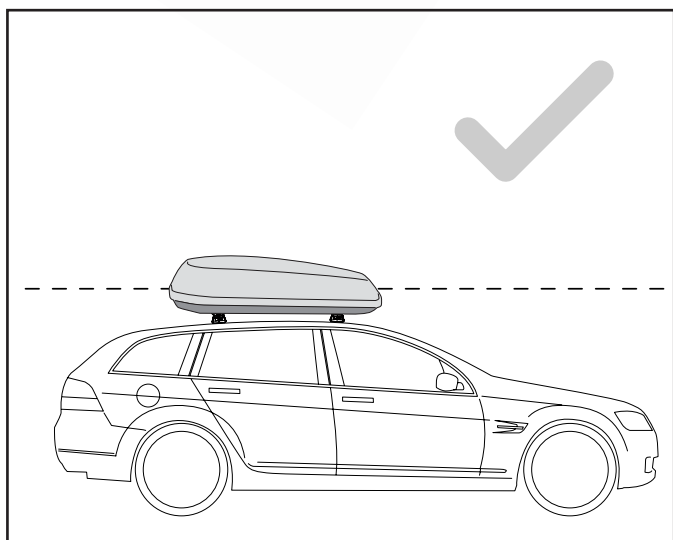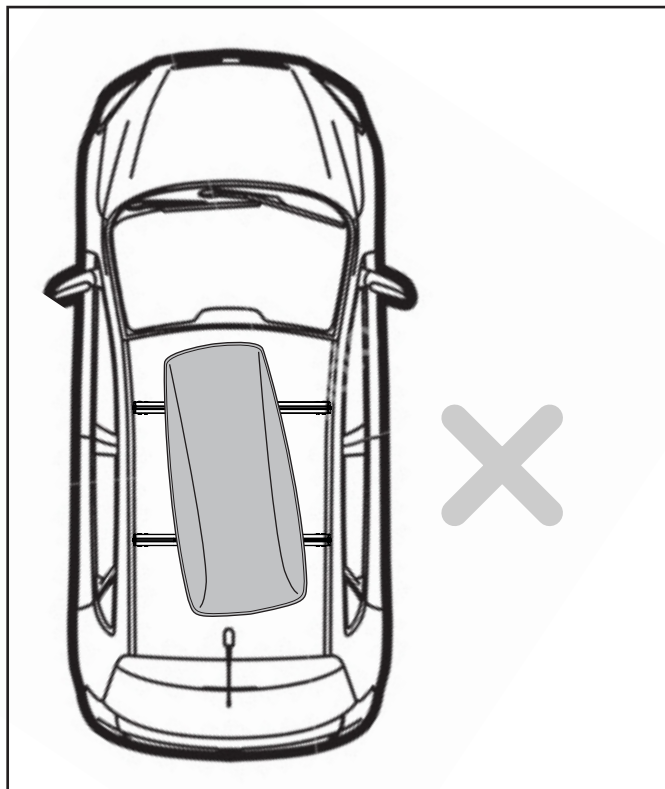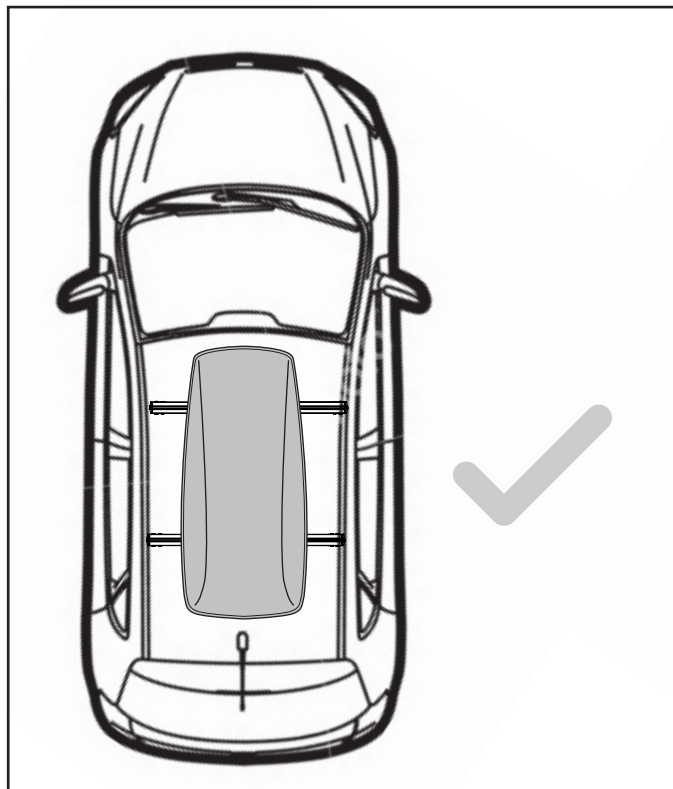





## Rhino Master Fit Luggage Boxes


- 3** After positioning your luggage box, unlock the box and lift the lid open.

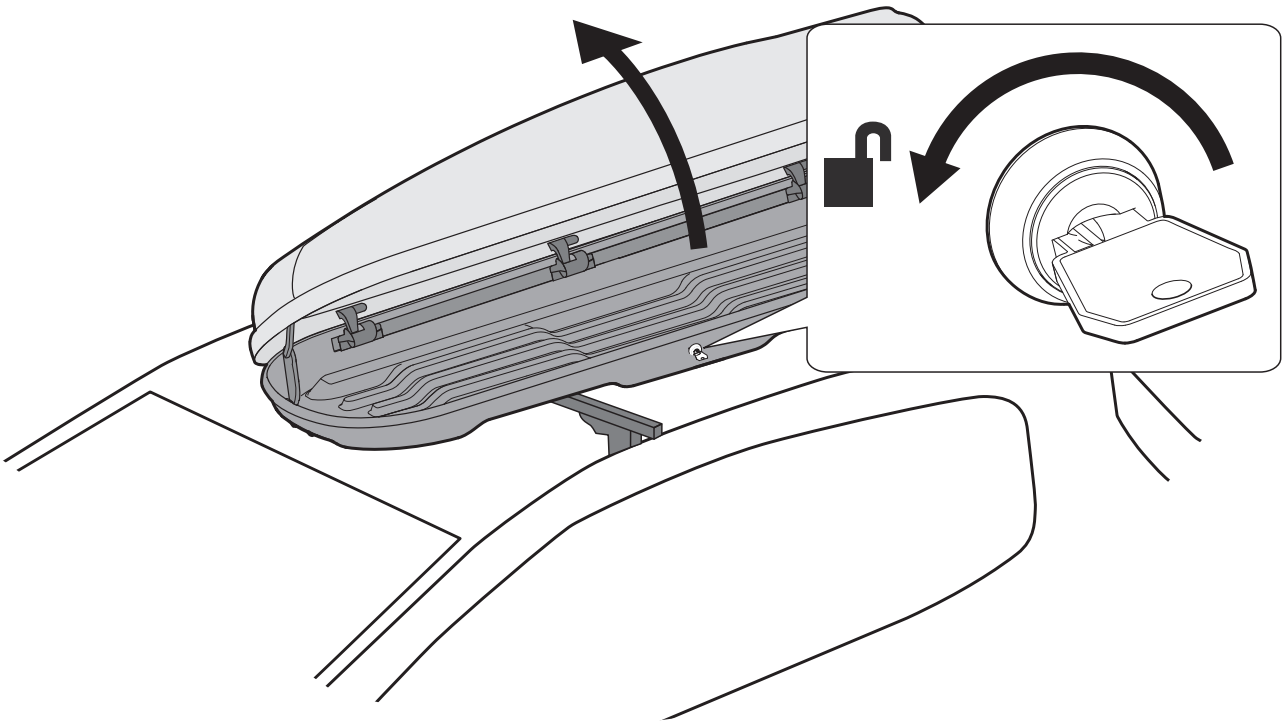

- 4** Position the claws as shown, aligned with the crossbars underneath.




Make sure that the luggage pod sits away from the leg and the end cap

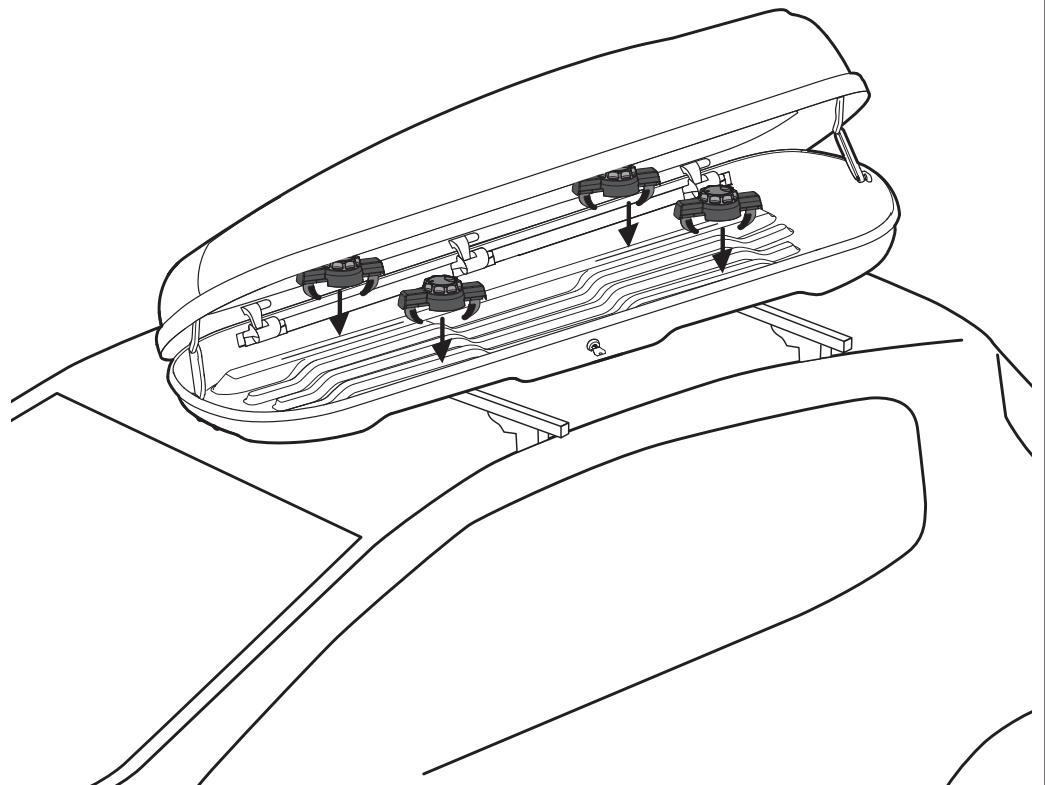




## Rhino Master Fit Luggage Boxes

5

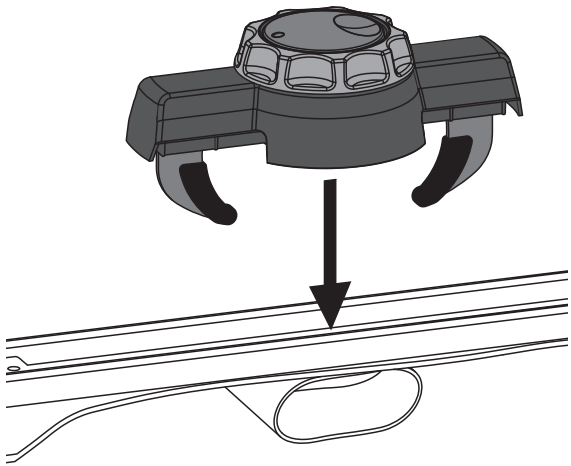

6

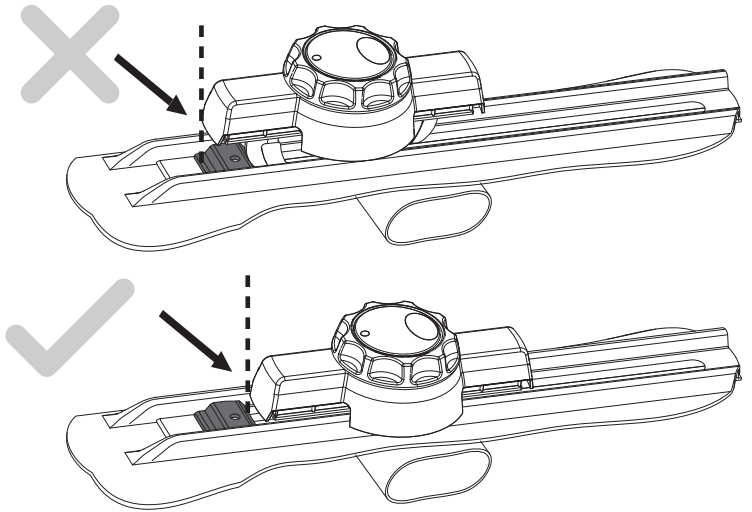

7

Tighten each claw as shown. Make sure that all claws are tightenend.


1



2




3

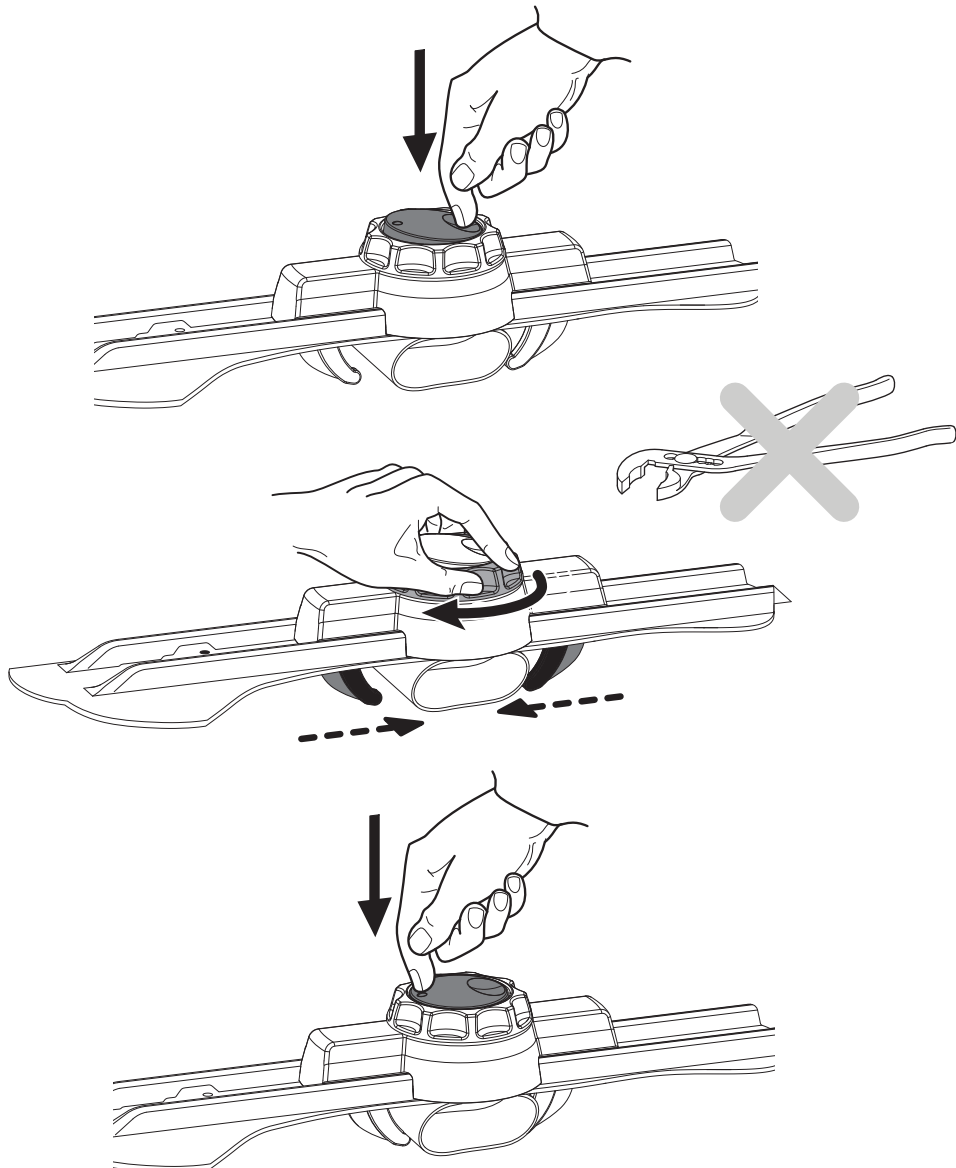




## Rhino Master Fit Luggage Boxes

**8** Use supplied straps to secure load.

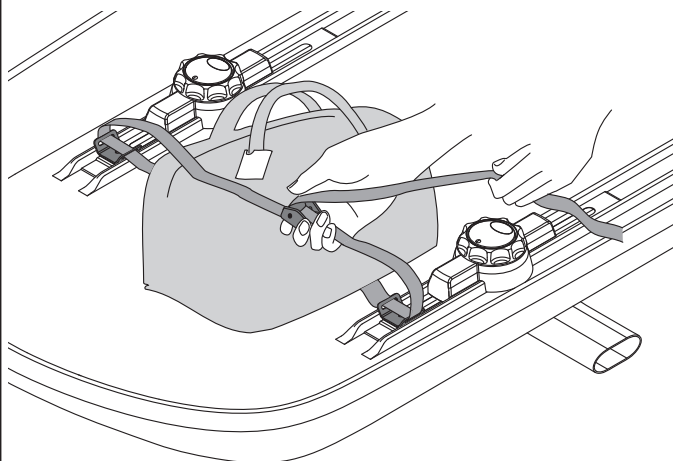


**9** Distribute load evenly as shown.


**Max. 75 KG**

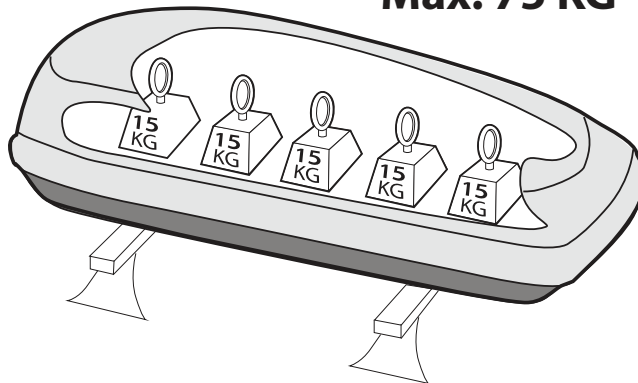


**10** Close the box and lock it. Write lock number down at the front of this instruction.

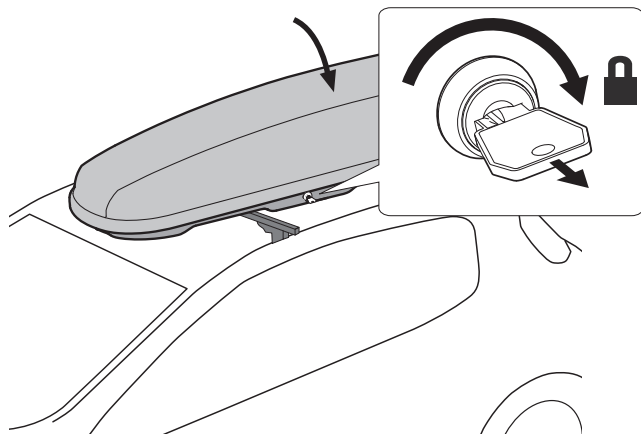


**11** Only install the box from the passenger side.

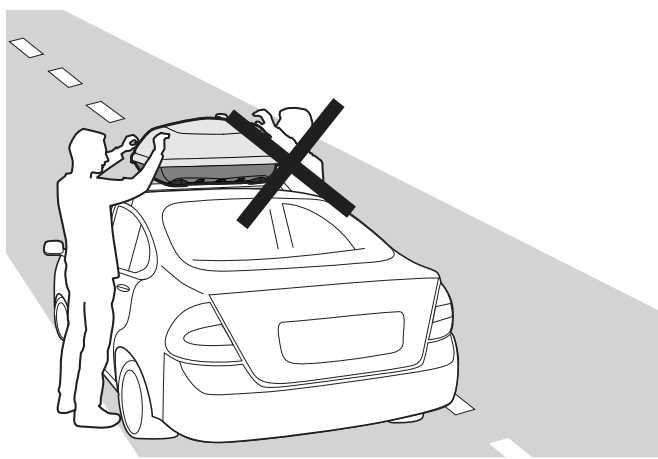


**12** Remove luggage box and crossbars before entering an automatic carwash.

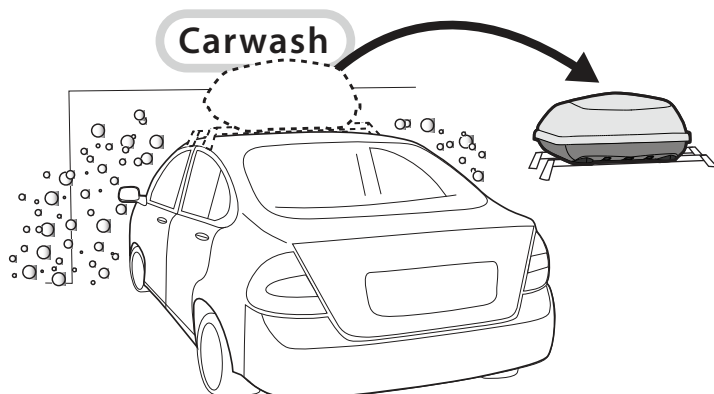

Please take note of the added height of the car due to the crossbar and luggage box.

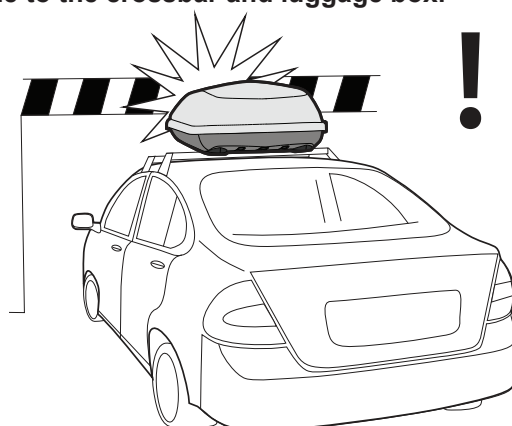

Clean the box with tap water and possibly with car shampoo. Never use the following products to clean the box or remove stains: cleaning agents, oil, solvents and cleaning products that contain alcohol, chloride and ammonia. These products have an impact on the box material and result in irreparable damage/discolouring.

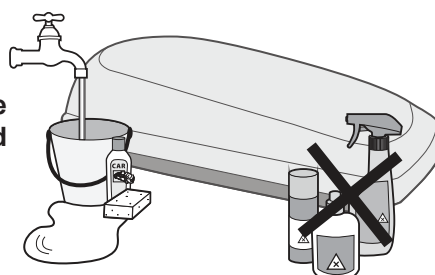





## Rhino Master Fit Luggage Boxes

### Important Information

**Maximum luggage box load carrying capacity: 75kg**

**Recommendations:**

Follow these instructions carefully when mounting and using your luggage box. If you notice one or more parts are missing, please contact your dealer and do not use or install the luggage box. Do not load the luggage box in such a way that the lid cannot be easily closed. Open and close the lid using both hands. The maximum roof load of your car as specified by the car manufacturer must not be exceeded. Note that the total roof load consists of; the weight of the luggage box, the weight of the Roof Racks and the weight of the luggage box contents.

**Load Ratings:**

The maximum load of the roof box is 75kg. Any sharp / pointed items in your luggage box should be properly protected in order to prevent damage. Make sure that the contents of the luggage box are properly secured and cannot move about while the car is moving. Car wash and water can be used to clean the luggage box. It is recommended that the luggage box be cleaned before storing it for extended periods.

**Sensitivity to Crosswinds, Behaviour in Curves and Braking.**

Remember that the luggage box may affect the road holding of your car (e.g. sensitivity to crosswinds, cornering and braking). The maximum speed with box fitted is 130km/h. Before driving off, make sure that your luggage box is properly secured to the roof racks and that the lid is closed.

**Check:**

After turning the luggage box lid key, the lid should not be able to be opened manually. Record down the number on the keys for future reference. To reduce fuel consumption remove the luggage box when not in use.

**Please remove luggage box and crossbars when putting vehicle through an automatic car wash.**

**Note for Dealers and Fitters**

It is your responsibility to ensure instructions are given to the end user or client

Rhino-Rack  
3 Pike Street, Rydalmere,  
NSW 2116, Australia.  
(Ph) (02) 9638 4744  
(Fax) (02) 9638 4822

Document No: RR252  
Prepared By: Andy Wana  
Authorised By: Richard Cropley

Issue No: 02  
Issue Date: 17/06/2010

These instructions remain the property of Rhino-Rack Australia Pty Ltd and may not be used or changed for any other purpose than intended.