

AT Series



Acoustical Tile Access Doors

Doors are designed for use with acoustical tile or gypsum board walls and ceilings. The door is engineered to install flush, virtually concealed. Door is recessed 5/8" to accept acoustical tile or gypsum board.

Door is 16 gage and frame is 12 gage, galvannealed steel with a prime coat finish.

Concealed Hinge operates completely out of sight so that only the metal thickness of the door and frame is visible.

Latch is screwdriver operated.

Guide Specification

Provide Elmdor® AT Series, Acoustical Tile Access Door (specify model number and options). Access door shall be fabricated from 16 gage and frame from 12 gage, galvannealed steel with a prime coat finish. Door shall be recessed 5/8" to accept acoustical tile or gypsum board. Hinge shall be concealed type. Latch shall be screwdriver operated.

Click here to Online Product Page and Pricing



Recyclable Product



MODEL NUMBER AND OPTIONS SELECTION

BASE MODEL NUMBER

☐ AT Acoustical Tile Access Door

Suffix Options

-AKL Allen Key Latch

☐ -GB Galvanized Drywall Bead -CL Cylinder Lock (one per door) ☐-SS Stainless Steel Construction.


Type 304 No 4 Finish Satin Finish


STANDARD AVAILABLE SIZES Special sizes available upon request.

NOMINAL DOOR SIZE (W X H)	CEILING OPENING (minimum required)	LATCHES	WEIGHT
AT 8" x 8"	8-1/8" x 8-1/8"	1	4 lbs.
AT 12" x 12"	12-1/8" x 12-1/8"	1	5.5 lbs.
AT 12" x 24"	12-1/8" x 24-1/8"	2	9.5 lbs.
AT 16" x 16"	16-1/8" x 16-1/8"	2	8.5 lbs.
AT 18" x 18"	18-1/8" x 18-1/8"	2	10 lbs.
AT 24" x 24"	24-1/8" x 24-1/8"	2	16 lbs.
AT 24" x 36"	24-1/8" x 36-1/8"	3	24.5 lbs.

NOTES:

- 1. TILE, BY OTHERS
- 2. CONCEALED HINGE
- 3. MOUNTING HOLES
- 4. SCREWDRIVER OPERATED LATCH
- 5. FRAME

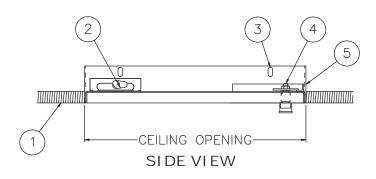



Click here to Online Product Page and Pricing

5		
SELECTION SUMMARY & APPRO	OVAL FOR MANUFACTURING	
Model Number & Options	Quantity	
Company	Date	
Contact	Title	
Approval for Manufacturing/Signature		

ΑT Revised: 3/24/09