



ASSEMBLY INSTRUCTIONS

Slat Back Chair 2PK

Stock # 07-2213C-Y



CUSTOMER SERVICE INFORMATION

Ying Fu Enterprise Co., Ltd.
EMAIL: css@yingfu.biz


PHONE: 1-855-258-5258
8:30 am to 5:00 pm CST, Mon. thru Fri.

GENERAL INFORMATION, TIPS & TRICKS

1. Please read the assembly instructions prior to assembling this product.
2. To avoid damage, assemble this product on a nonabrasive surface such as carpet.
3. Make sure all bolts are tightly fastened before the product is used.
4. Not for commercial use.
5. Care: Wipe with a damp cloth. Use furniture polish or lemon oil on the wood as needed. Avoid prolonged exposure to moisture.



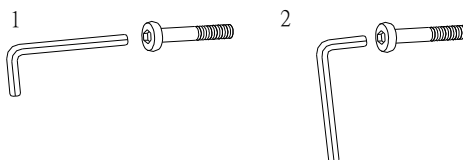

Please make sure you have all parts before beginning assembly. Please wait until all steps are completed before tightening bolts. We recommend using two people for assembly.

1. Use the long end of the Allen wrench to fasten Allen bolts loosely and quickly.
2. Use the short end of the Allen wrench for final tightening.










!WARNING: After a few days of initial assembly and the chairs have acclimated to their new environment, retighten all hardware. Periodically check and retighten the screws every few months.

PART LIST



A. Chair Back	B. Seat Frame	C. Chair Seat
		
QTY: 2 pcs	QTY: 2 pcs	QTY: 2 pcs
D. Chair Leg		
		
QTY: 4 pcs		

HARDWARE LIST

1. Flat Washer	2. Spring Washer	3. Wood Screw
		
QTY: 20 pcs	QTY: 20 pcs	QTY: 8 pcs
4. Long Bolt	5. Medium Bolt	6. Short bolt
		
Dia 1/4 x 3 inch L	Dia 1/4 x 2-1/2 inch L	Dia 1/4 x 1-1/2 inch L
QTY: 8 pcs	QTY: 8 pcs	QTY: 4 pcs
7. Allen Wrench		
		
QTY: 1 pc		

ASSEMBLY INSTRUCTIONS



Diagram #1

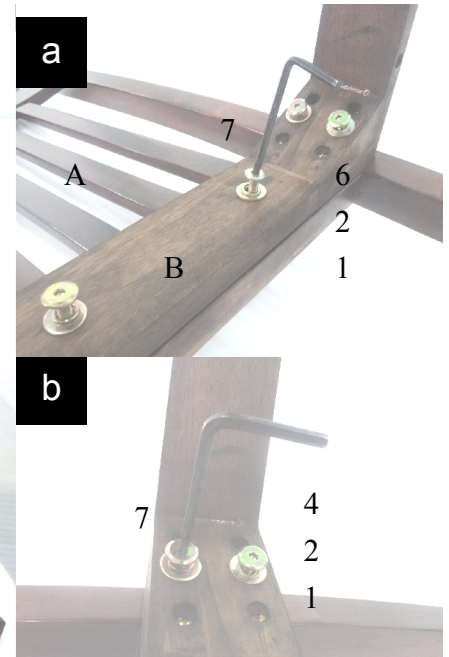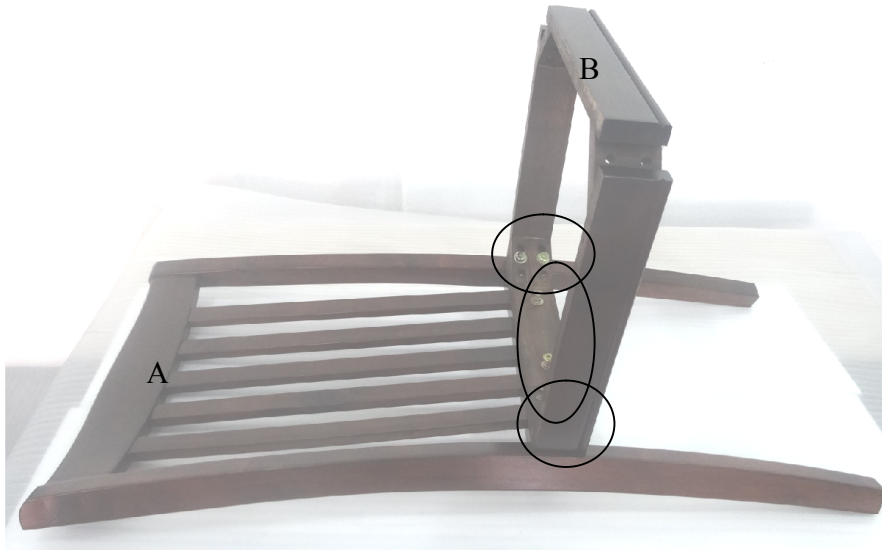

Step 1

1. Attach Seat Frame (B) to Chair Back (A) using Short Bolt (6), Spring Washer(2), and Flat Washer (1) as shown in inset (a) and using Long Bolt (4), Spring Washer(2) and Flat Washer (1) as shown in inset (b). Do not tighten the bolts at this step.

Diagram #2

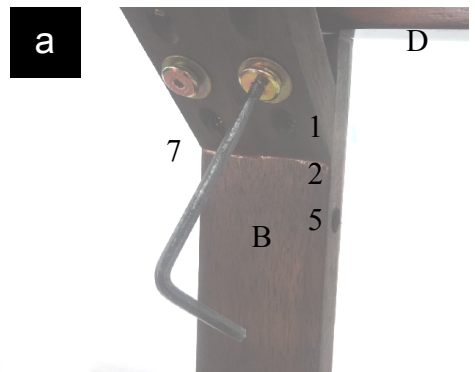
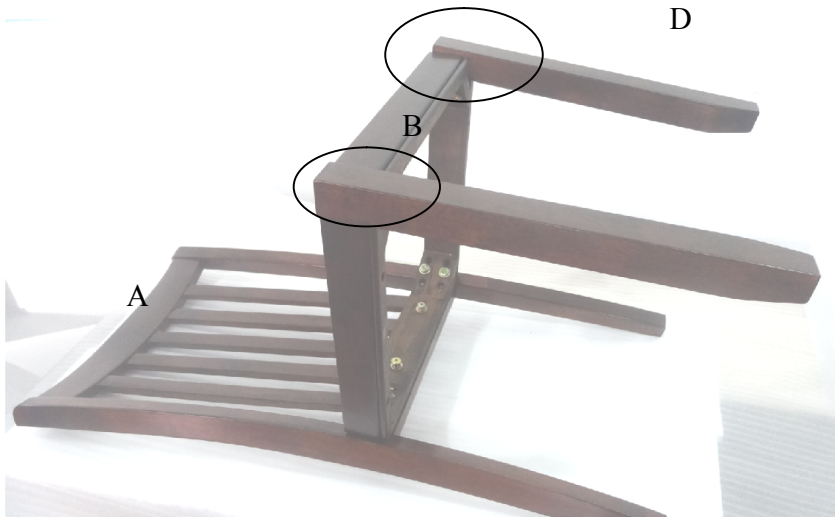


Step 2

2. Attach Front Legs (D) to the assembled unit from Step 1, using Medium bolt (5), Spring Washer (2) and Flat Washer (1) as shown in inset (a). Do not tighten the bolts at this step.
3. Turn the chair upright. Make sure the assembled chair is level and square. Tightly fasten all bolts with the Allen Wrench (7).

ASSEMBLY INSTRUCTIONS

Diagram #3

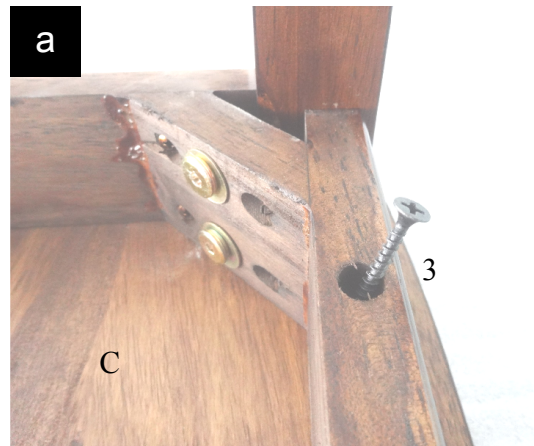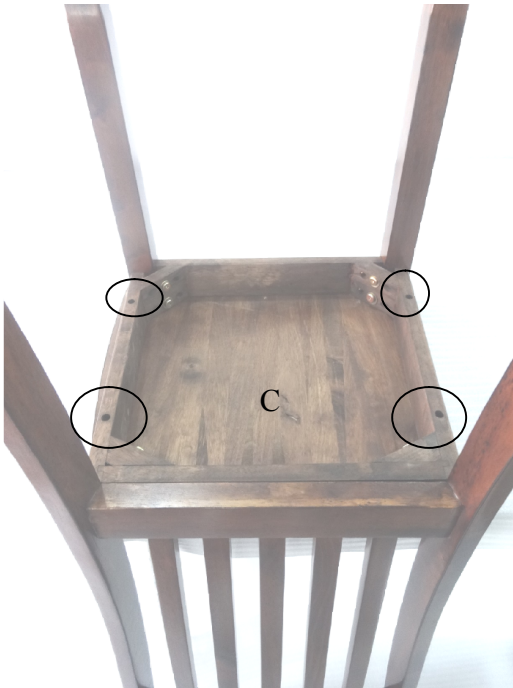

Step 3

4. Place Chair Seat (C) upside down on a non-abrasive table surface. The rear (tapered end) on the Seat Frame (B) should be near the table edge.
Hint: Protect the non-abrasive table surface and Chair Seat (C) by laying a towel in-between the chair seat and table.
5. Place the assembled Chair Frame on the Chair Seat (C) as shown. Attach with Wood Screw (3) as shown in inset (a) with Phillips head screwdriver (not provided).
6. Turn the chair upright. The chair is ready to use.
7. Repeat all steps above to assemble the other chair.