



## ASSEMBLY INSTRUCTIONS

### 5PC Storage Dining Set

Sears Stock # 56170

Stock #07-2204-Y



#### CUSTOMER SERVICE INFORMATION

Ying Fu Enterprise Co., Ltd.

EMAIL: [css@yingfu.biz](mailto:css@yingfu.biz)

PHONE: 1-855-258-5258


8:30 am to 5:00 pm CST, Mon. thru Fri.

## GENERAL INFORMATION, TIPS & TRICKS

1. Please read the assembly instructions prior to assembling this product.
2. To avoid damage, assemble this product on a nonabrasive surface such as carpet.
3. Make sure all bolts are tightly fastened before the product is used.
4. Not for commercial use.
5. Care: Wipe with a damp cloth. Use furniture polish or lemon oil on the wood as needed. Avoid prolonged exposure to moisture.





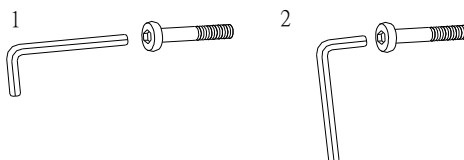

**Please make sure you have all parts before beginning assembly. Please wait until all steps are completed before tightening bolts. We recommend using two people for assembly.**

1. Use the long end of the Allen wrench to fasten Allen bolts loosely and quickly.
2. Use the short end of the Allen wrench for final tightening.

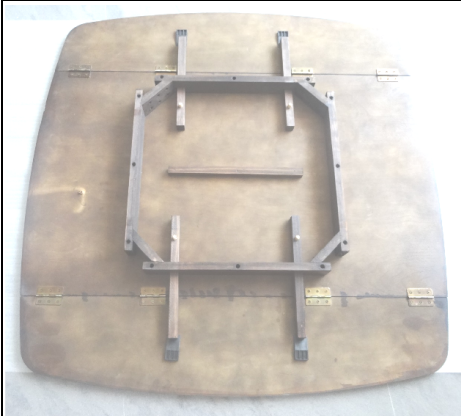

**!WARNING:** After a few days of initial assembly and the chairs have acclimated to their new environment, retighten all hardware. Periodically check and retighten the screws every few months.

## PART LIST-TABLE

A. Tabletop	B. Table Leg #1	C. Table Leg #2
		
QTY: 1 pc	QTY: 3 pcs	QTY: 1 pc
D. Top Shelf	E. Middle Shelf	F. Bottom Shelf
		
QTY: 1 pc	QTY: 1 pc	QTY: 1 pc
G. Side Panel	H. Door	
		
QTY: 3 pcs	QTY: 1 pc	


## HARDWARE LIST-TABLE

1. Allen Bolt	2. Spring Washer	3. Flat Washer
		
<b>Dia 1/4 x 2-1/2 inch L</b>		
QTY: 8 pcs	QTY: 12 pcs	QTY: 12 pcs
4. Allen Wrench	5. Metal L Bracket	6. short Screw
		
QTY: 1 pc	QTY: 4 pcs	QTY: 14 pcs
7. Knob	8. Knob Bolt	9. Magnet
		
QTY: 1 pc	QTY: 1 pc	QTY: 1 pc
10. Allen Bolt		
		
<b>Dia 1/4 x 2 inch L</b>		
QTY: 4 pcs		



## ASSEMBLY INSTRUCTIONS-TABLE




Diagram #1

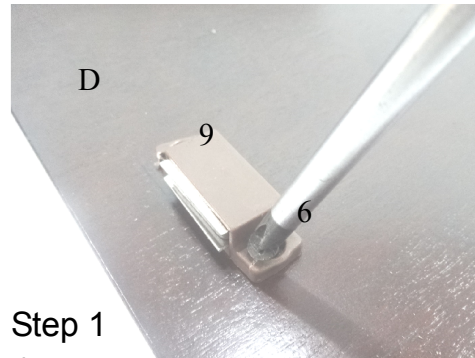

### Step 1

1. Attach magnet (9) to the bottom of Top shelf (D) using two short screws (6) as shown. Tighten the screw with a Phillips screwdriver (not included).

Diagram #2

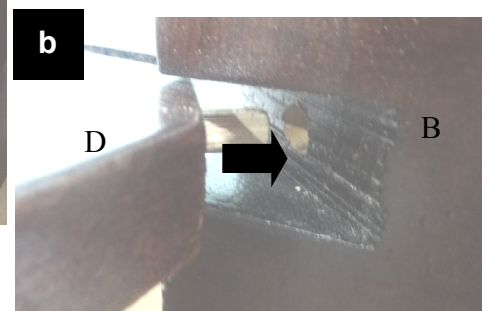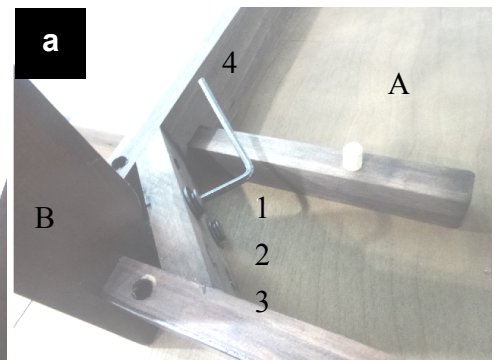
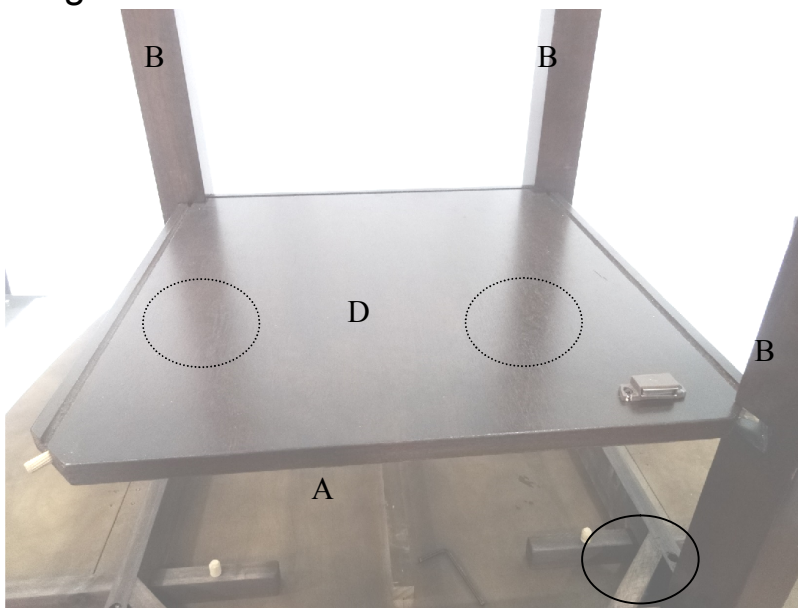


### Step 2

2. Place the table top (A) upside down on a non-abrasive surface such as carpet. Attached three table legs #1 (B) to the table top (A) using six Allen bolts (1), six spring washers (2) and six flat washers (3) as shown in inset (a). Do not tighten the bolts at this step.
3. Attach the Top shelf (D) to the table legs #1 (B) as shown in inset (b).

## ASSEMBLY INSTRUCTIONS-TABLE



Diagram #3

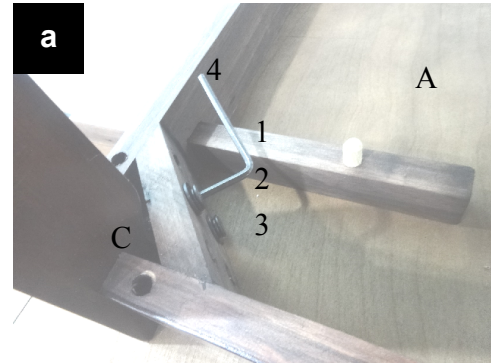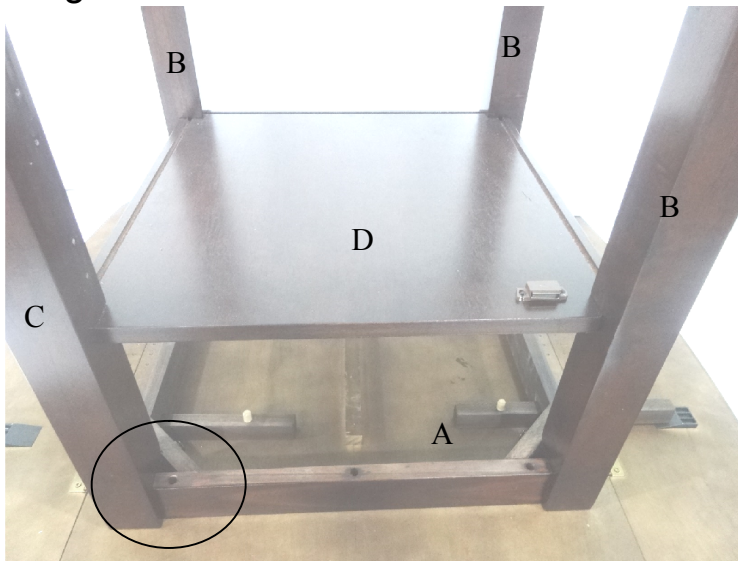

### Step 3

4. Attach Table leg #2 (C) to the Table top (A) using two Allen bolt (1), spring washers (2) and flat washers (3) as shown in inset (a). Tighten all the Allen bolts with Allen Wrench (4).

Diagram #4

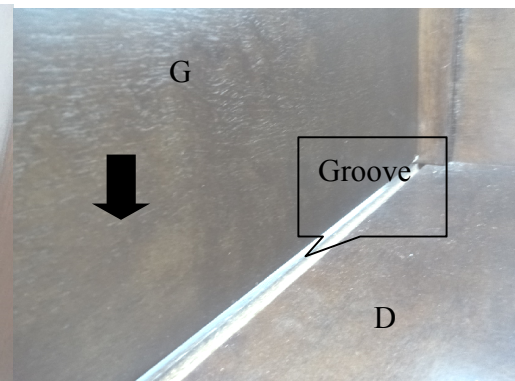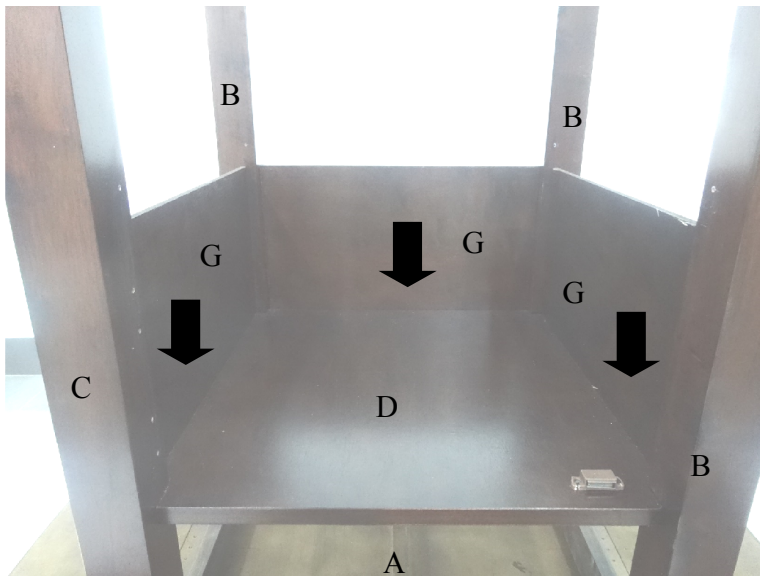


### Step 4

5. Attached three side panels (G) to the Top shelf (D) by inserting the side panels (G) into the grooves on the Top shelf (D) as shown.

## ASSEMBLY INSTRUCTIONS-TABLE

Diagram #5

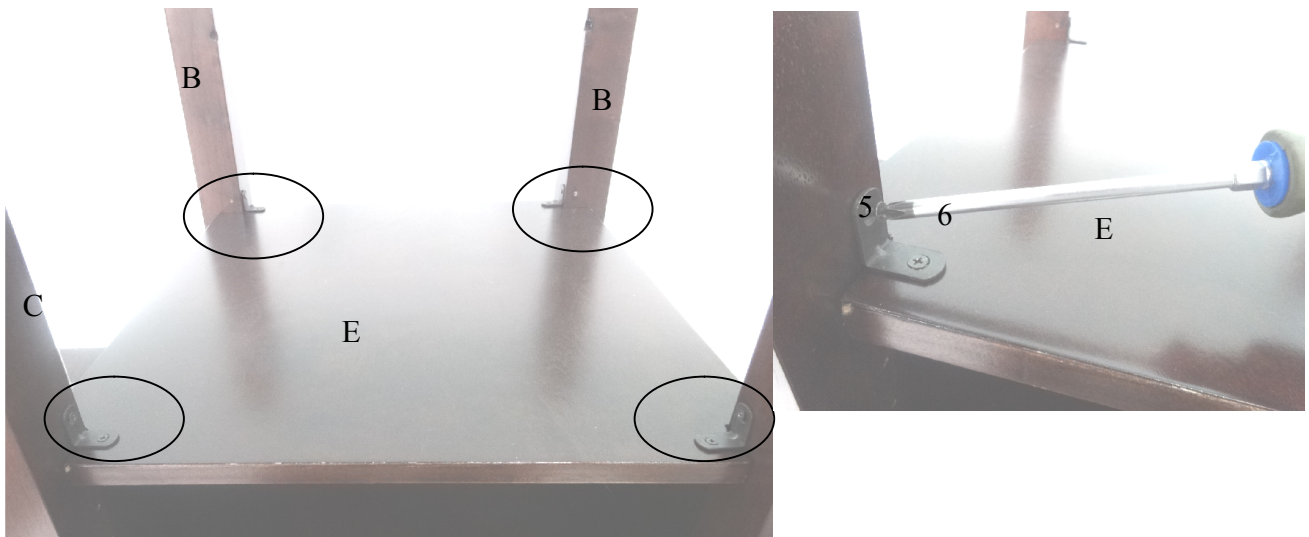


### Step 5

6. Attach the middle shelf (E) to the assembled unit by inserting the side panels (G) into the grooves on the top of middle panel (E).

7. Secure the middle panel (E) to the table legs using four metal brackets (5) and eight short screws (6). Tighten the screws with a Phillips screwdriver (not included).

Diagram #6

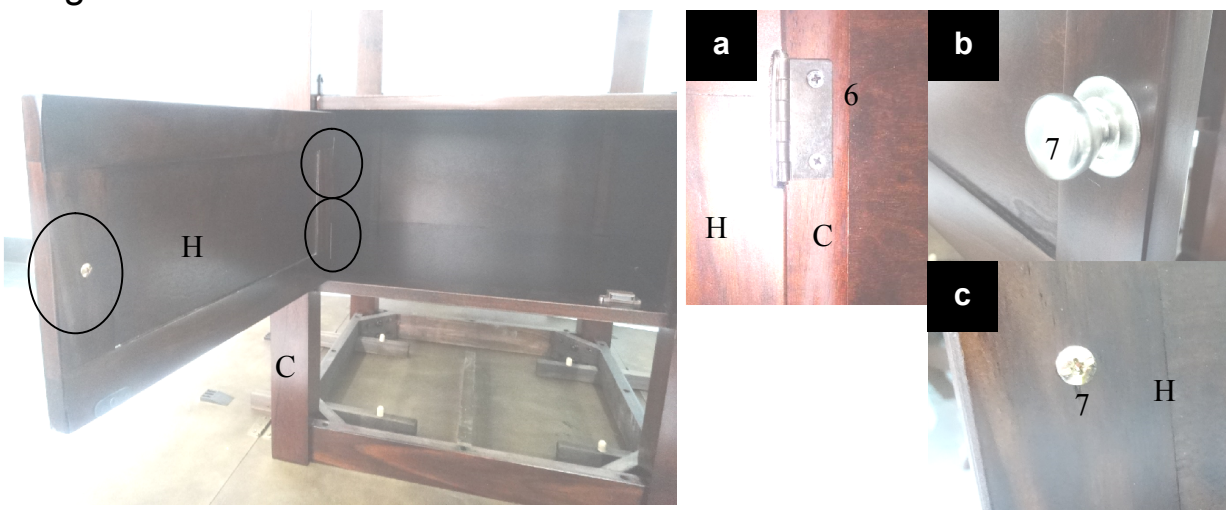

### Step 6


8. Attach the door (H) to table leg # 2 (C) by screwing four short screws (6) through the hinges on the door (H) to the table leg #2 (C) as shown in inset (a). Tighten the screws with a Phillips screwdriver (not included).

9. Attach one knob (7) to the door (H) using one knob bolt (8) as shown in inset (b) & (C).



## ASSEMBLY INSTRUCTIONS-TABLE

Diagram #7

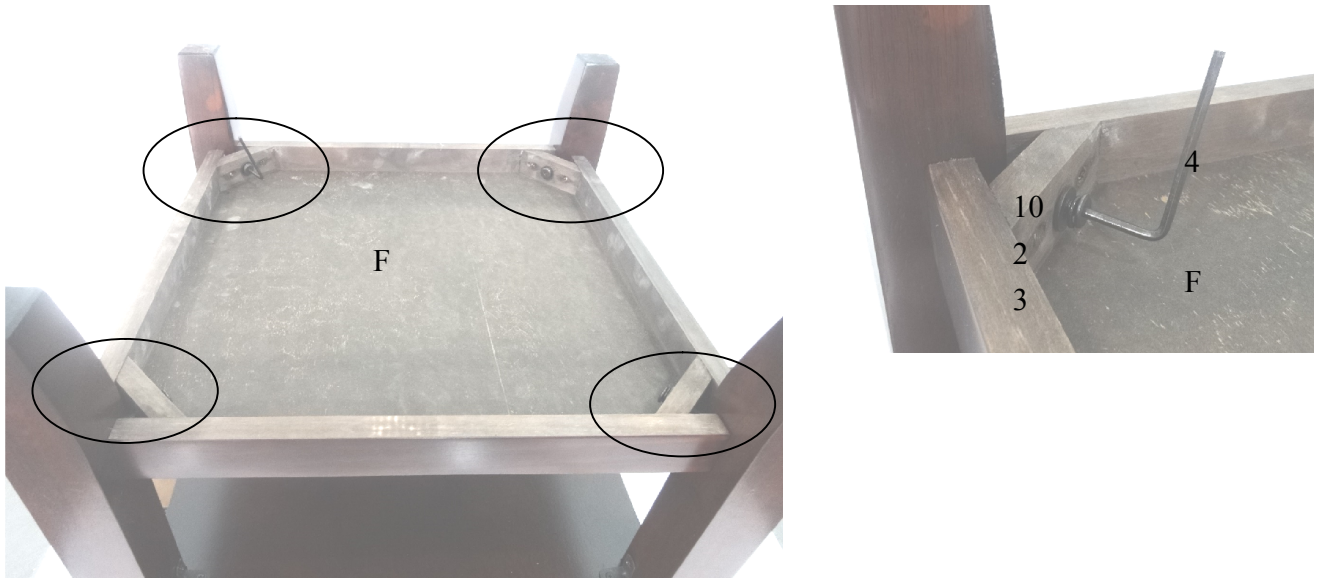









Sep 7




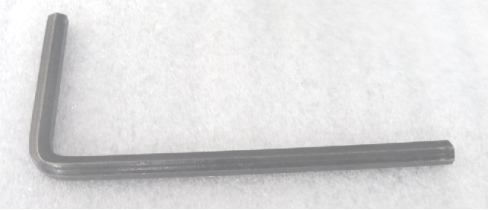
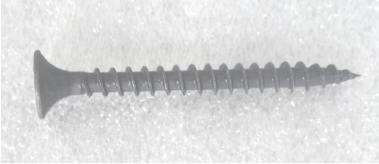

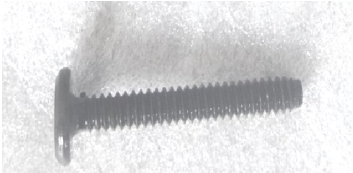
10. Attach the bottom panel (F) to the assembled unit using four Allen bolts (10), spring washers (2) and flat washers (3). Tighten all the Allen bolts with Allen Wrench (4).

11. Turn the table upright. The table is now ready to use.

## PART LIST-CHAIR

I. Chair Back	J. Seat Panel	K. Seat Frame
		
QTY: 4 pcs	QTY: 4 pcs	QTY: 4 pcs
L. Chair Right Front Leg	M. Chair Left Front Leg	N. Front Crossbar
		
QTY: 4 pcs	QTY: 4 pcs	QTY: 4 pcs
O. Right Side Crossbar	P. Left Side Crossbar	
		
QTY: 4 pcs	QTY: 4 pcs	




## HARDWARE LIST-CHAIR

1. Allen Bolt	2. Spring Washer	3. Flat Washer
		
<b>Dia 1/4 x 2-1/2 inch L</b>		
QTY: 16 pcs	QTY: 40 pcs	QTY: 40 pcs
4. Allen Wrench	11. Long Screw	12. Allen Bolt
		
		<b>Dia 1/4 x 3 inch L</b>
QTY: 1 pc	QTY: 40 pcs	QTY: 16 pcs
13. Allen Bolt		
		
<b>Dia 1/4 x 1-1/2 inch L</b>		
QTY: 8 pc		



## ASSEMBLY INSTRUCTIONS- CHAIR

Diagram #8

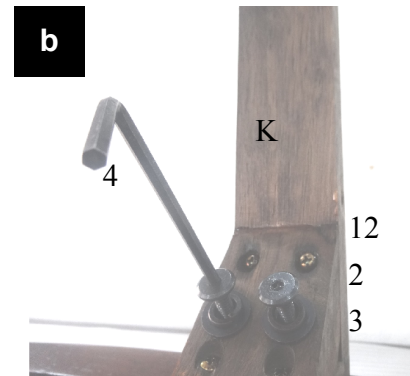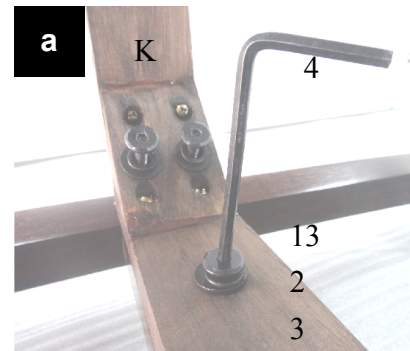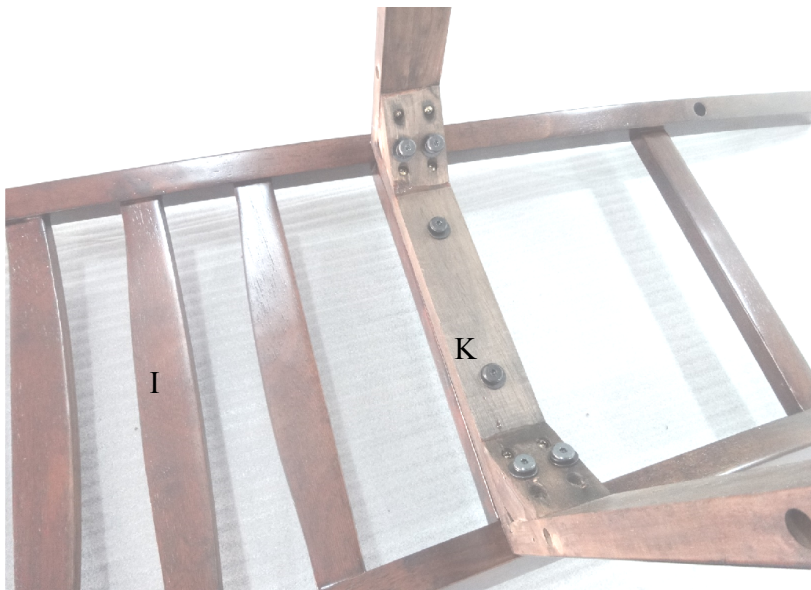


### Step 1

12. Attach seat frame (K) to chair back (I) using four Allen bolts (12), two short Allen bolts (13), six spring washers (2) and six flat washers (3) as shown.

Note: Do not tighten the bolts at this step. Use the two short Allen bolts (13) in the two holes near the center of the seat frame (K) and four Allen bolts (12) in the corners of the seat frame (K) as shown in inset (a) & (b).

## ASSEMBLY INSTRUCTIONS- CHAIR

Diagram #9

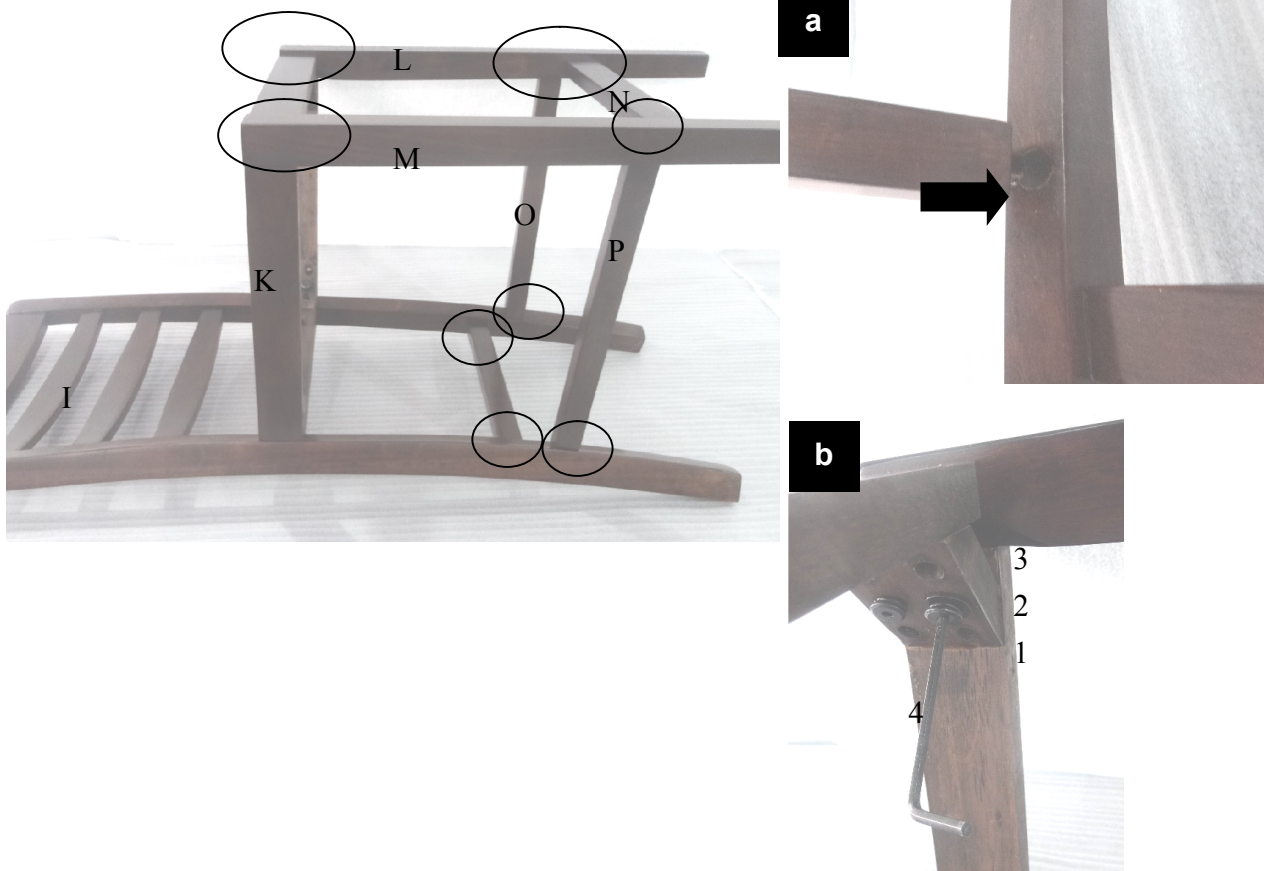

### Step 2


13 Attach left and right front leg (L&M) to the seat frame (K) using four Allen bolts (1), four spring washers (2) and four flat washers (3) as shown in inset (b). Do not tighten the bolts at this step.

14. Insert the front crossbar (N), and left and right side crossbar (Q&P) into the holes on the chair back (I) and chair legs (L&M) as shown in inset (a). The small holes on the bottom of the crossbars must face the bottom of the chair.

15. Turn the chair upright. Make sure the assembled chair is level and square. Tightly fasten all bolts with the Allen wrench (4).

## ASSEMBLY INSTRUCTIONS- CHAIR

Diagram #10

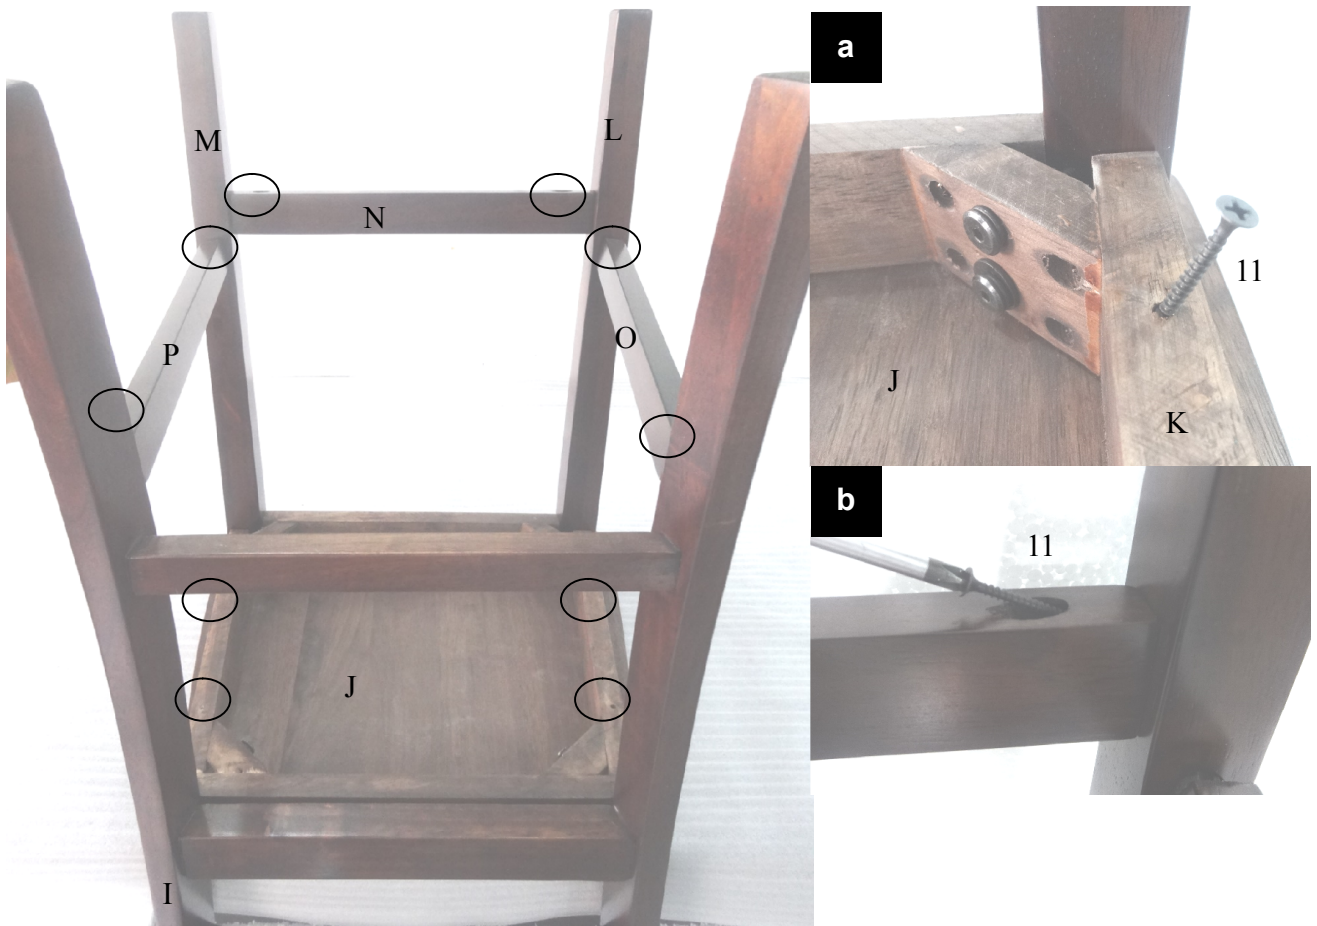

### Step 3

16. Place chair seat (J) upside down on a non-abrasive table surface. The rear (tapered end) on the seat frame (K) should be near the table edge.

Hint: Protect the non-abrasive table surface and chair seat (J) by laying a towel in-between the chair seat and table.

17. Place the assembled chair frame on the chair seat (J) as shown. Attach with four long screws (11) as shown on inset (a).

18. Secure the crossbars (N,O & P) to the chair back and chair legs using six long screws (11) as shown in inset (b).

19. Turn the chair upright. The chair is now ready to use.

20. Repeat diagram # 8 to # 10 to assemble the other chairs.