

HOBART®

HOBART BROTHERS CO.
TROY, OHIO USA

5/3/1
INDUSTRIAL
WARRANTY

Handler® 190

230V Wire Feed Welder



251091
March 2016



Includes:

- Comfortable 10 ft. (3 m) H100S4-10 gun
- 10 ft. (3 m) work cable with clamp
- Built-in gas solenoid valve and dual-gauge regulator with gas hose
- Spool hub assembly accommodates 4 or 8 in. spools
- Sample spool of .030 in. (0.8 mm) self-shielding flux-cored wire
- .030 in. (0.8 mm) contact tips
- Quick Select™ drive roll for .024 in. (0.6 mm) or .030/.035 in. (0.8/0.9 mm) solid wire, and .030/.035 in. (0.8/0.9 mm) flux-cored wire
- Power cord with plug
- Welding guide and material thickness gauge
- Owner's manual with installation, operation and maintenance guidelines

500554

Built with Hobart quality and durability, the Handler 190 is a wire welding package with industrial performance capable of operating on 230/240 volt circuits. The broad output range of 25–190 amps allows you to weld 24 gauge up to 5/16 inch steel.

The Handler 190 is capable of running the following wires: .023–.035 in. (0.6–0.9 mm) mild steel or stainless steel, .030–.045 in. (0.8–1.2 mm) flux-cored, and .030–.035 in. (0.8–0.9 mm) aluminum. Seven output voltage settings and infinite wire feed speed control make the unit easy to set and adjust for different materials, thicknesses and wires.



Optional
SpoolRunner™
100 spool gun

An integrated spool gun control circuit allows direct plug-in for the **optional** SpoolRunner™ 100 spool gun. The spool gun eliminates wire

feeding problems associated with soft aluminum wire and also runs mild or stainless steel wire. A selector switch for MIG gun or spool gun operation makes switching guns quick and easy.

Features	Benefits
7 voltage selections, enhanced magnetics and infinite wire feed speed control	Offers easier fine control of the output parameters for improved arc performance with less spatter for a better bead appearance and less clean up.
Accepts uncomplicated, easy-to-install direct plug-in SpoolRunner 100 spool gun	Spool guns enhance feedability and reduce “bird-nesting” associated with soft aluminum wires.
Integrated spool gun control circuitry is standard	No additional control box or adapter is required to connect the SpoolRunner 100 spool gun.
Door chart with initial settings	Quickly reference initial settings for different wires, gases, materials and thicknesses. Provides quick starting point for novices and professionals alike.
Built-in contactor	Eases use and excellent safety feature which makes wire electrically “cold” until trigger is pulled.
Durable feed head with quick-release drive roll tension lever	Positive feed with adjustable tension plus easy accessibility to thread new wire.
Convenient polarity changeover with tip holder	Access makes it quick and easy to change polarity for solid or tubular wire. Includes convenient storage holes for spare tips.
Quick Select drive roll	Makes setup quicker by offering three grooves — two for different size solid wire and a third for flux-cored wire.
Short circuit protection	Protects unit against current overload.
Self-resetting thermal overload	Protects power transformer to ensure reliability.
Self-resetting motor protection	Protects wire feed system from overload, no fuses to change or circuit breaker buttons to reset.
Hobart's 5/3/1 industrial warranty	Five-year warranty on transformers, three years on electronics (drive motors, rectifiers) and one year on guns.
Designed, assembled and supported in Troy, Ohio USA	Industrial-quality products with time-tested reliability since 1917.

Specifications (SUBJECT TO CHANGE WITHOUT NOTICE.)



Rated Output	Current Range	Max. Open-Circuit Voltage	Wire Feed Speed Range	Amps Input at Rated Output, 60 Hz			Dimensions	Net Weight
130 A, 21.5 VDC at 30% duty cycle on 60 Hz	25–190 A	31 V	40–700 IPM 50–740 IPM at no load	20.5	4.7	3.88	H: 12-3/8 in. (315 mm) W: 10-5/8 in. (270 mm) D: 19-1/2 in. (495 mm)	68 lb. (31 kg)

Certified by Canadian Standards Association to both the Canadian and U.S. Standards.

Handler 190 Welding Guide

Settings are approximate. Adjust as required. Thicker materials can be welded using proper technique, joint preparation and multiple passes.

Recommended Voltage and Wire Speed Settings for thickness of metal being welded. Number on left of slash is Voltage Setting/Number on right of slash is Wire Feed Setting.

Material Being Welded	Wire Type and Polarity Setting	Suggested Shielding Gas 20–30 CFH Flow Rate	Diameter of Wire Being Used	24 ga. .024 in. (0.6 mm)	20 ga. .036 in. (0.8 mm)	18 ga. .048 in. (1.2 mm)	16 ga. .060 in. (1.6 mm)	11 ga. 1/8 in. (3.2 mm)	3/16 in. (4.8 mm)	1/4 in. (6.4 mm)	5/16 in. (8.0 mm)	CHANGING POLARITY
Steel	Solid Wire ER70S-6 (DCEP)	C₂₅ Gas Mixture 75% Argon/25% CO ₂ Produces less spatter. Better appearance.	.024" (0.6 mm)	1/30	2/40	3/50	4/60	5/80	6/90	—	—	DCEN Electrode Negative for Flux-Cored Wire
			.030" (0.8 mm)	—	1/40	2/50	3/50	5/60	6/60	6/70*	7/80*	
			.035" (0.9 mm)	—	3/40	4/40	5/40	5/50	6/50	7/50*	7/60*	
Steel	Solid Wire ER70S-6 (DCEP)	100% CO₂	.024" (0.6 mm)	—	—	3/35	5/40	5/60	6/80	7/90*	—	
			.030" (0.8 mm)	—	—	4/40	5/40	5/50	6/50	7/50*	7/50*	
			.035" (0.9 mm)	—	—	3/25	4/25	5/40	6/40	7/40*	7/40*	
Stainless Steel	Stainless Steel (DCEP)	Tri-Mix 90% He/7.5% Ar/2.5% CO ₂	.024" (0.6 mm)	—	3/40	3/40	4/50	6/60	7/70	—	—	
			.030" (0.8 mm)	—	3/30	3/35	4/30	5/35	6/50	7/50*	—	
			.035" (0.9 mm)	—	3/15	3/35	4/30	5/40	7/40	7/50*	—	
Steel	Flux Core E71T-11 (DCEN)	No Shielding Gas Required Good for windy or outdoor applications.	.030" (0.8 mm)	—	1/35	1/40	2/40	4/60	5/40	6/40*	—	DCEP Electrode Positive for Solid Wire
			.035" (0.9 mm)	—	1/30	1/35	2/40	3/50	5/50	6/60	7/60*	
			.045" (1.2 mm)	—	—	—	1/25	3/30	4/35	5/35	6/35*	
Aluminum with Optional SpoolRunner™ 100 Spool Gun	Aluminum** 4043 AL (DCEP)	100% Argon**	.030" (0.8 mm)	—	—	—	1/55	5/80	6/85	—	—	
	—	—	.035" (0.9 mm)	—	—	—	—	5/60	6/70	7/80	—	
	Aluminum** 5356 AL (DCEP)	100% Argon**	.030" (0.8 mm)	—	—	—	1/75	5/95	6/100	—	—	
—	—	—	.035" (0.9 mm)	—	—	—	—	5/75	6/90	7/100	—	

Match feed roll groove to diameter of wire being used. Set tension knob setting to 3 at start. Adjust tension per instructions in the manual.


CAUTION! Do not change voltage switch position while welding. See owners manual for more information.

Wire speed listed is a starting value only. Wire speed setting can be fine-tuned while welding. Wire speed also depends on other variables such as stick out, travel speed, weld angle, cleanliness of metal, etc.

*Multiple passes may be required depending on the application and joint design.



**Aluminum wire settings are with the SpoolRunner™ 100 spool gun attached. A spool gun eliminates many feedability issues associated with the soft aluminum wire. A "push angle" for the torch is normally recommended for aluminum.

Control Panel

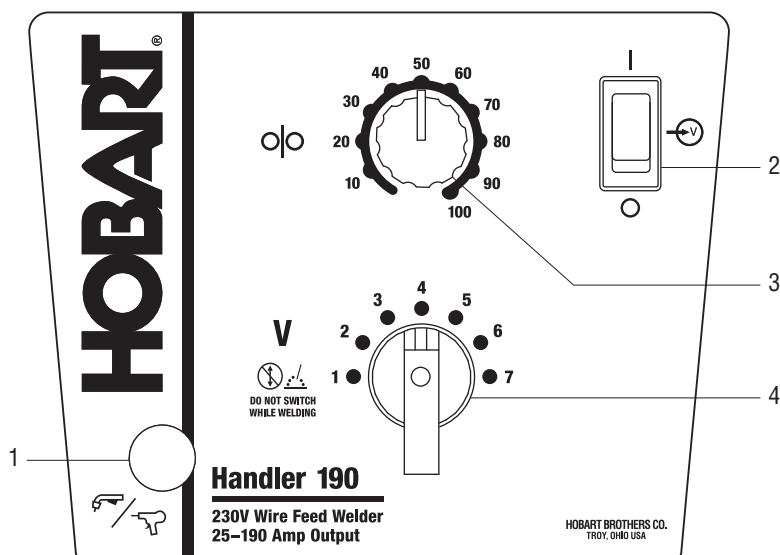

1. Trigger Lead Connection
2. Power Switch
3. Wire Speed Control
4. Voltage Control Switch

Performance Data

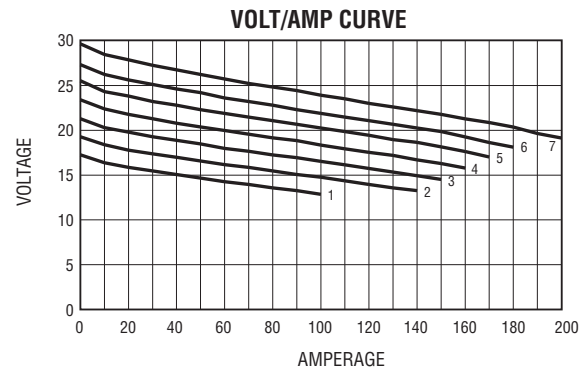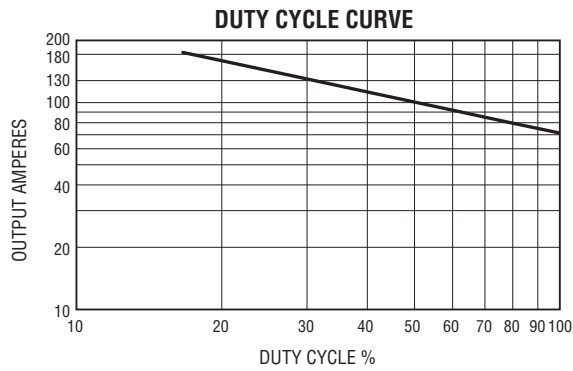

Accessories



SpoolRunner™ 100 Spool Gun 300796

- 10 ft. (3 m) cable
- Weld 16 gauge–3/16 in. (1.6–4.8 mm) aluminum with the Handler 190
- Rated 150 amps, 60% duty cycle
- For .023–.035 in. (0.6–0.9 mm) aluminum, steel and stainless steel wire on 4 in. (102 mm) diameter spools
- Includes rugged plastic carrying case
- Shipped with three .030 in. (0.8 mm) and three .035 in. (0.9 mm) contact tips

H100S4-10 Replacement MIG Torch 245926

Comes in 10 ft. (3 m) length with liner for .030–.035 in. (0.8–0.9 mm) diameter wire.



Small Cart/Cylinder Rack 194776

Designed for portable MIG welders. Accommodates large and small gas cylinders.



Protective Cover 195186

Weather-resistant nylon resists stains and mildew while protecting the finish of your welder.

Consumables

Item	For H100S4-10 Gun/Power Source — Hobart Package Part #	For H100S4-10 Gun — Miller Package Part #	For SpoolRunner 100 — Hobart Package Part #
Contact Tips			
.023/.025 in. (0.6 mm)	770174 (5 per package)	087299 (10 per package)	199730 (5 per package)
.030 in. (0.8 mm)	770177 (5 per package)	000067 (10 per package)	186419 (5 per package)
.035 in. (0.9 mm)	770180 (5 per package)	000068 (10 per package)	186406 (5 per package)
.045 in. (1.2 mm)	770183 (5 per package)	000069 (10 per package)	—
MIG Nozzle	770404	169715	186405
Gasless Flux-cored Nozzle	770487	226190	—
Tip Adapter	770402	169716	—
Liners			
.023/.025 in. (0.6 mm)	196139	194010	—
.030/.035 in. (0.8/0.9 mm)	196139	194011	—
.035/.045 in. (0.9/1.2 mm)	196140	194012	—
Power Source Drive Rolls			
Quick Select™ drive roll for .024 in. (0.6 mm) or .030/.035 in. (0.8/0.9 mm) solid wire, and .030/.035 in. (0.8/0.9 mm) flux-cored wire	261157	261157	—
Dual-groove, V-knurled drive roll for .030–.035 in. (0.8–0.9 mm) and .045 (1.2 mm) flux-cored wire	202926	202926	—
SpoolRunner 100 Drive Roll			
For .023 in. (0.6 mm) wire	—	—	199731
For .030/.035 in. (0.8/0.9 mm) wire	—	—	186413
SpoolRunner 100 Push Roll			
For .023 in. (0.6 mm) wire	—	—	199732
For .030/.035 in. (0.8/0.9 mm) wire	—	—	186414

Typical Installation for Optional SpoolRunner™ 100 Spool Gun to Handler® 190

It's quick and easy to install the SpoolRunner 100 spool gun on the Handler 190. Just plug the power pin of the spool gun into the feedhead, attach the trigger lead and flip the switch on the inside panel for spool gun operation. Install the correct wire and gas for the job and it's ready to go.

