# 36" Gas Freestanding Range

professional series

### E36GF76TPS



### PRODUCT DIMENSIONS

 Height
 41-5/8"

 Width
 35-7/8"

 Depth
 27-1/2"

### **MORE EASY-TO-USE FEATURES**

### **Extra-Large Oven Capacity**

Spacious 6.0 cubic foot interior gives you all the cooking space you need.

#### **Continuous Grates**

Designed for cooking multiple dishes at varying temperatures on a single cooktop, continuous grates allow you to move even the heaviest pots and pans from burner to burner with the utmost ease.

### Signature Cobalt Blue Interior

### **Signature Features**



### Smooth-Glide® Oven Racks Ball bearing oven racks glide with unparalled

ease and extend fully for effortless access.

### Min-2-Max Burners®

With the widest range of BTU performance in the industry, these best-in-class dual-flame sealed burners offer unrivaled versatility — from a roaring 18,000-BTU boil to a gentle 1,100-BTU simmer.



## CustomConvect<sup>3™</sup> Convection Technology

Distributes heat evenly throughout the oven by adding a third cooking element plus a variable speed fan.




### Flexible Cooktop Configuration

The cooktop offers a wide range of burner sizes, giving you more flexibility so you can create a multi-course meal at once.

Right Front	18,000 – 1,100
Right Rear	5,000 - 850
Left Front	18,000 – 1,100
Left Rear	14,000
Center Front	14,000
Center Rear	9,500



CONTROL PANEL FEATURES	
Manual Oven Control	Yes
Professional-Style Stainless Steel Console	Yes
Large Professional Skirted Knobs with Bezel	Yes
RANGETOP FEATURES	
Min-2-Max Burners® (BTU)	2 (18,000 – 1,100)
Sealed Power Burner™ (BTU)	2 (14,000)
Sealed Precision Burner™ (BTU)	1 (9,500)
	1 (5,000 – 850)
Continuous Grates	Yes
Electronic Ignition	Yes
OVEN CAVITY FEATURES	
Capacity	6.0 Cu.Ft.
Bake Burner (BTU)	1 (30,000)
Broil Burner (BTU)	1 (11,500)
Convection Burner (Watts)	1 (350)
Signature Cobalt Blue Oven Interior	Yes
Self-Clean with Door Lock	Yes
Extra-Large Oven Window	Yes
Cook Modes -	
Bake	Yes Yes
Broil Convection Bake	Yes
Convection Boast	Yes
Halogen Oven Lights	Yes
Smooth-Glide® Oven Racks	2
Conventional Racks	1
	•
ADDITIONAL FEATURES	
Stainless Steel Backsplash	Yes
Full Stainless Steel Side Panels	Yes
Professional Handle Fully Adjustable Leveling Legs	Yes Yes
	res
ACCESSORIES	la alicala al
Broiler Pan and Insert Stainless Steel Cleaner	Included Included
Wok Ring	Included
	iliciadea
SPECIFICATIONS	
Gas Supply Connection Location	Left Bottom Rear
Power Cord Location	Middle Bottom Right
LP Gas Conversion Kit Voltage Rating	Included 120V/60Hz/7A
Voltage Hating  Connected Load (kW Rating) @ 120 Volts <sup>‡</sup>	0.84
Shipping Weight (Approx.)	425 Lbs.
For use on adequately wired 120V, dedicated circuit having 2-w	

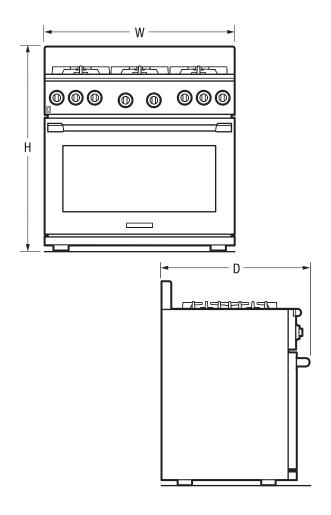


Height (Adjustable)	41-5/8"
Width	35-7/8"
Depth (Including Handle) (with Door 90° Open)	28-3/4" 48-3/8"



### **Electrolux Major Appliances, N.A.**



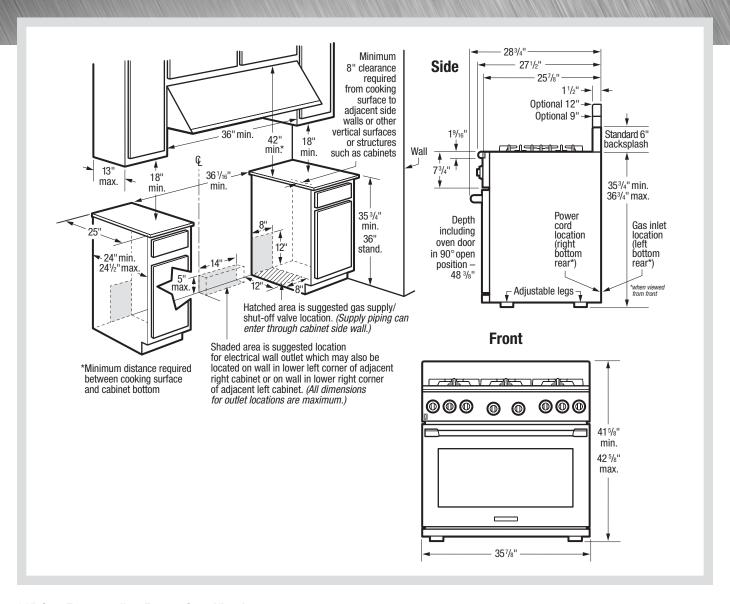

#### 36" Gas Freestanding Range Specifications

- Product Weight 380 Lbs.
- Voltage Rating –120V/60Hz/7A
- Connected Load (kW Rating) @120 Volts = 0.84 kW (For use on adequately wired 120V, dedicated circuit having 2-wire service with a separate ground wire. Appliance must be grounded for safe operation.)
- Amps @120 Volts = 7 Amps
- Always consult local and national electric and gas codes.
- Make sure wall coverings around range can withstand heat generated by range.
- Linoleum or any other synthetic floor covering located beneath range, must be capable of withstanding minimum heat of 90°F above room temperature without shrinking, warping or discoloring. Insulating pad or 1/4"-thick plywood required between range and a carpeted floor.
- Do not obstruct flow of combustion air at oven vent nor around base or beneath lower front panel of range. Range requires fresh air for proper burner combustion.
- Do not install range beneath any downward-blowing, overhead vent hood or air curtain.

- Range ships with 3/4" factory regulator.
- · LP Gas conversion kit supplied.
- Overhead cabinetry should not exceed a 13" maximum depth.
- Absolute minimum horizontal distance between overhead cabinets installed to either side of appliance must be no less than maximum width of appliance.
- Allow 42" minimum clearance between top of rangetop and bottom of unprotected wood or metal overhead cabinetry.
- Allow 8" minimum clearance from edge of rangetop to nearest combustible wall on either side of unit.
- To reduce risk of fire when using overhead cabinetry, install vent hood that projects horizontally a recommended minimum of 5" beyond bottom of cabinets.

Note: For planning purposes only. Refer to Product Installation Guide on the web at electroluxicon.com for detailed instructions.



### Electrolux Major Appliances, N.A.