FRIGIDAIRE.

FFID2459VS

DISHWASHER

PRODUCT DIMENSIONS

24" BUILT-IN

Height (Min.-Max.)

Depth (Including Door)

Width



AVAILABLE **COLORS**



MORE EASY-TO-USE FEATURES

33-3/4"-35-3/4"

24-1/4"

Cleans 12 Place Settings

Cleans 12 place settings in one cycle.

ENERGY STAR® Certified

Maximize your energy and dollar savings with ENERGY STAR® Certified Appliances.

Time Saving 24 - Hour Delay Start

Set your dishwasher to run on your schedule. It can be set to run up to 24 hours in advance.

Quiet Operation Won't Run You Out Of The Room

Run your dishwasher while you're in the same room. It runs at 49 DBAs.

Automatically Adjusts Cycles Taking The Guess Work Out Of Cleaning

DishSense™ Technology automatically adjusts the wash cycle based on how much cleaning your dishes need for an effective clean.

Filtration System

Self-cleaning filter eliminates food particles, keeping dishes clean.

CERTIFICATIONS

ENERGY STAR®



NSF® International Certification



SIGNATURE FEATURES

BladeSpray® Arm

Gives you better water coverage for a thorough clean every time.

Sanitize cycle removes 99.9% of common

National Sanitation

Foundation® Certified

household bacteria.

Clean Dishes of All Sizes

Clean even your largest dishes and cookie sheets with an adjustable upper rack level to fit oversized dishes and kitchen tools of all shapes and sizes.

Remarkable Dry

Dishes come out remarkably dry every time with EvenDry™.

FRIGIDAIRE.

24" BUILT-IN

FEATURES

Control Design	Ready-Select®
Door Latch	Yes
Stay-Put Door Hinge Design	Yes
Low Rinse-Aid Indicator Light	Ves

Stainless Steel Interior Color Interior Design Tall Tub Wash System Direct Feed 5 Wash Levels Wash Speeds Sound Package UltraQuiet™ I Filter Stainless Steel Filter Trap Removable Food Disposer Hard dB Level 49

CYCLES

Drying System

Number of Cycles	5	
PowerPlus™ (Heavy)	Yes	
Normal	Yes	
China / Crystal	Yes	
Energy Saver	Yes	
Rinse Only	Yes	
Cycle Indicator Light	Yes	
Control Lock	Yes	
OPTIONS		

Static Vent

	Heat	Yes
	No Heat Dry	Yes
	Hi-Temp Wash	Yes
	Delay Start	1-24 Hours
ľ		

RACK SYSTEM

Rack Design	Standard	
Rack Coating	Nylon	
Lower Rack -		
SpaceWise® Silverware Basket	Standard	
Upper Rack -		
Rack Type	Standard	
CERTIFICATIONS		

ENERGY STAR®	Yes		
SPECIFICATIONS			
Water Inlet Location	Left Bottom Front		
Water Usage (Gallons)	4.0 - 8.0		
Water Pressure (PSI)	20 - 120		
Integral Air Gap on Supply	Yes		
Leveling Legs	Yes		
Power Supply Connection Location	Right Bottom Front		
Voltage Rating	120V / 60 Hz / 15A		
Connected Load (kW Rating) @ 120 Volts ¹	1.44		
Amps @ 120 Volts	15.0		
Shipping Weight (Approx.)	83 Lbs.		


¹ For use on adequately wired 120V, dedicated circuit having 2-wire service with a separate ground wire. Appliance must be grounded for safe operation.

PRODUCT DIMENSIONS


A-Height (Adjustable))	33-3/4" - 35-3/4"
B-Width	23-3/4"
C-Depth (Including Door)	24-1/4"
D - Depth (To Tub Flange)	22-1/2"
Depth with Door Open 90	° 50-1/4"

	CUTOUT DIMENSIONS	UT DIMENSIONS	
ľ	Height (Min.)	34"	
	Height (Max.)	35-3/4"	
	Width (Min.)	24"	
	Depth (Min.)	24"	

.com ht and also cutout say = 32 1/22E 1//"





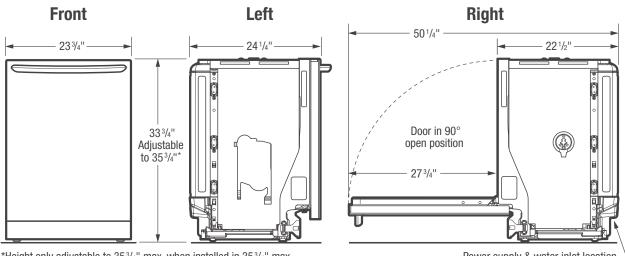

*Height only adjustable to 353/4" max. when installed in 353/4" max. standard cabinetry cutout. (Dimensions do NOT include insulation – insulation blanket may be compressed during installation.)

Power supply & water inlet location (bottom rear)

