Built-in Trim Kit

Model # MWTK27FGUF MWTK30FGUD MWTK30FPUF MWTK30FGUF MWTK27FGUD

BEFORE YOU BEGIN

- IMPORTANT Save these instructions for local inspector's use.
- **IMPORTANT** Observe all governing codes and ordinaces.
- **Note to Installer** Be sure to leave these instructions with the Consumer.
- Note to Consumer Keep these instructions for future reference.
- Skill level Installation of this appliance requires basic mechanical and electrical skills.

Read these instructions completely and carefully.

- Proper installation is the responsibility of the installer.
- Product failure due to improper installation is not covered under the Warranty.
- Unplug the microwave oven before attempting installation of this kit.
- Because the kit includes metal parts, caution should be used in handling and installation to avoid the possibility of injury.
- Do not remove permanently affixed labels, warnings, or plates from the product. This may void the warranty.

FOR YOUR SAFETY:

WARNING – Before beginning the installation, switch power off at service panel and lock out to prevent being switched on accidentally. When the service cannot be locked, securely fasten a prominent warning device, such as a tag, to the service panel.

IMPORTANT - PLEASE READ AND FOLLOW

THIS BUILT-IN KIT IS DESIGNED FOR USE ONLY WITH ELECTROLUX MICROWAVE OVENS SPECIFYING BUILT-IN KIT

IMPORTANT:

Before installing the exhaust duct, confirm the floor is level.

The level bubble should be equal distance from level guide lines.



QUESTIONS?

For customers in the United States call:1-800-944-9044 For customers in Canada call: 1-800-265-8352 (English)

1-800-668-4606 ext.8199 (French)

Visit our Website at: www.frigidaire.com

READ CAREFULLY.

KEEP THESE INSTRUCTIONS.

PN: A06823511 June 2018

PARTS INCLUDED IN THE KIT

- 1. Front Frame Assembly- QTY 1
- 2. Exhaust Duct QTY 1

Bottom Mounting Rail - QTY 2

- 3. Screw A QTY 11+3 extra
- 4. Screw B QTY 4 + 2 extra

CHOOSING A LOCATION FOR YOUR MICROWAVE OVEN IF BUILT-IN

Built-In Trim Kit allows for the installation of microwaves listed below to be built into a cabinet or wall by itself or over an electric wall oven*.

Microwave Models:

FGMO226NUF FGMO226NUD FPMO227NUF

CGMO226NUF CPMO227NUF

See Illustration 1 for proper location and when building in above a wall oven. Carefully follow both the wall oven installation instructions and Electrolux's Built-in Kit instructions. If building over a wall oven, be sure the clearance between the wall oven and the microwave oven is a minimum of 3 inches. See illustration 2.

*NOTE: Trim Kit and microwave can only be built-in

over an electric self-clean or non self-clean

single cavity wall oven.

CABINET OR WALL CUTOUT

Cutout Dimensions(See illustration 3)

Height (A) Minimum Maximum	16 3/4" (42.5 cm) 17" (43.2 cm)
Width (B) Minimum Maximum	24 3/4" (62.9 cm) 25" (63.5 cm)
Depth (C) Minimum	20" (50.8 cm)

IMPORTANT:

Before installing the exhaust duct, confirm the floor is level.

The level bubble should be equal distance from level guide lines.



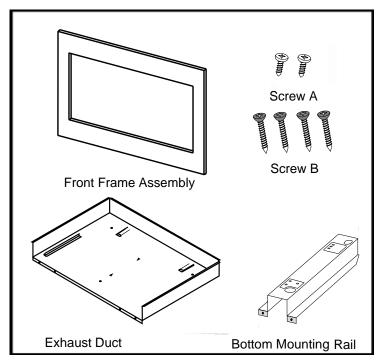


Illustration 1

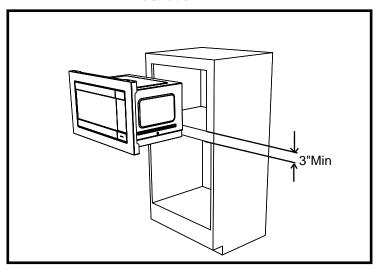


Illustration 2

Trim Kit Overall Dimensions		
	MWTK27	MWTK30
Height	18" (458mm)	18" (458mm)
Width	27" (686mm)	30" (762mm)
Depth	1 1/2" (38.9cm)	1 1/2" (38.9cm)

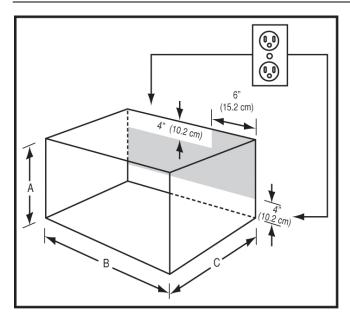


Illustration 3




Illustration 4

ELECTRICAL OUTLET LOCATION

Outlet should NOT be in the shaded area as indicated on Illustration 3

NOTE 1:

The floor of the opening should be constructed of plywood strong enough to support the weight of the oven and floor load (approximately 100 pounds). The floor should be level for proper operation of the oven. Be sure to check the local building code as it may require that the opening be enclosed with side, ceiling and rear partition. The proper functioning of the oven does not require the enclosure.

EXHAUST DUCT ASSEMBLY

- Draw a Central Line on floor. Place the Exhaust Duct in the opening, When the Exhaust Duct Assembly is in the opening correctly, the Center Line is in the middle of the Exhaust Duct Assembly. See Illustration 4.
- Secure the Exhaust Duct Assembly with the three screws A.

IMPORTANT: Secure screws in outer hole. 3 pcs are needed for exhaust duct assembly

IMPORTANT:

Before installing the exhaust duct, confirm the floor is level.

The level bubble should be equal distance from level guide lines.



Bottom Mounting Rail

Turn microwave upside down so you are looking at oven bottom. Secure the bottom Mounting Rail on oven with four SCREWS A. See Illustration 5.

NOTE: Please make sure to align the holes(marked with "36") of bottom mounting rail and the holes(marked with "36") of microwave oven's bottom plate.


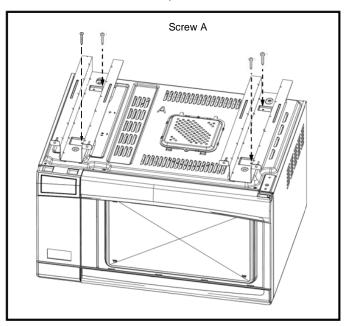


Illustration 5

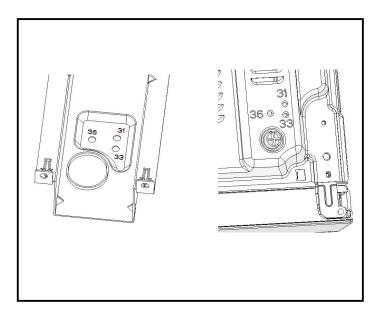

OVEN INSTALLATION

- Place the oven adjacent to the wall or cabinet opening. Plug the power cord into the electrical outlet.
- 2. Carefully guide the assembled oven into the prepared opening. Slide the oven on the Exhaust Duct Assembly. See Illustration 6.
- 3. Secure the Exhaust Duct Assembly with the four screws A.




Illustration 6

FRAME INSTALLATION

- 1. Position the FRAME ASSEMBLY to be square with the oven. Carefully place the FRAME ASSEMBLY on the oven. See Illustration 7.
- 2. Check that it is level and then secure with two SCREWS B. Secure the bottom portion of the FRAME ASSEMBLY with the two remaining SCREWS B. See Illustration 8.




Illustration 7




Illustration 8