

Performance Series




Warning: Excessive weight hazard!

Use two or more people to move, assemble or install cabinets and locker to avoid back injury.

Do not leave children unattended near cabinets. High risk of tipping if cabinets are installed incorrectly; securely attach cabinets to the wall to avoid serious injury.

For assistance, call 1.877.306.8930; for UK 0800.031.4069; e-mail at info@newageproducts.com

Worktop




48" Worktop. Fits over 2 Cabinets




72" Worktop. Fits over 3 Cabinets


Weight Capacity




Wall Cabinet
Max 100 lbs.

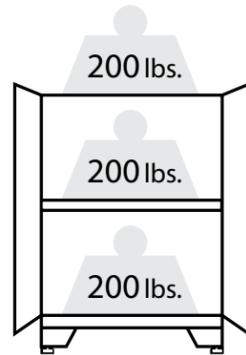

Base Cabinet
Max 600 lbs.

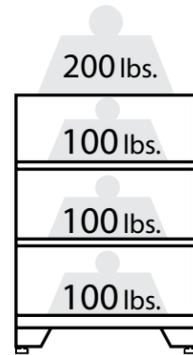

Tool Cabinet
Max 500 lbs.

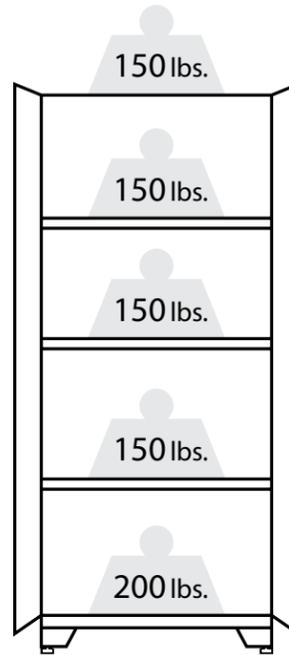





Locker
Max 800 lbs.

Unpacking


- Begin by placing the package on a covered flat surface.
- Remove all cardboard, foam packaging material and clear plastic bags.
- Dispose / recycle all packaging materials.
- Verify all the contents in the box and gather the required tools. See "Parts" and "Tools Needed" in the list below.

Parts Supplied


	Base Drawer	Tool Drawer	Locker	Wall Drawer
Height-Adjustable Steel Leveling Legs	4	4	4	0
Hex Bolt (1/4" x 5/8") 7/16" Hex Head	20	20	20	4
Hex Lock Nuts (1/4") - 7/16" Hex Head	4	4	4	4
Lock Washer (1/4")	20	20	20	4
Washer (1/4")	20	20	20	4
Handle Bolts (8-32 x1")	4	6	4	0
Stainless Steel Handles	2	3	2	0
Wood Screw (#8 x 5/8")	4	4	3	0
Wall Washer (1/4") (1 1/4" Diameter with 1/4" hole in the middle)	2	2	7	4
Wall Screw (1/4" x 2.5") - 7/16" Hex Head	2	2	4	4
Worktop Support Bracket (sold separately)	0	0	0	0
Full Width Adjustable Shelves	1	0	3	0
Keys	2	2	2	2

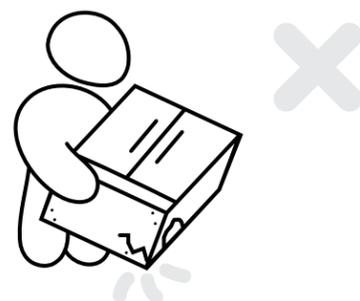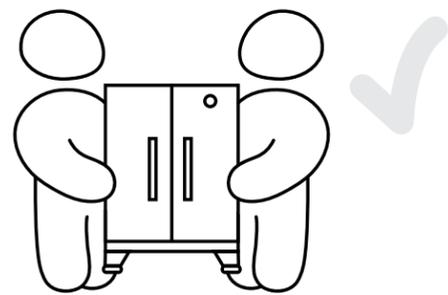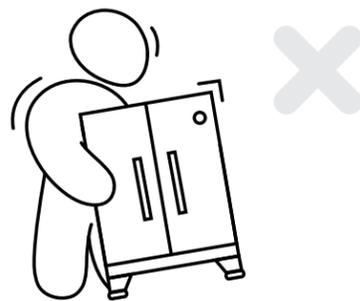


Full Width
Adjustable
Shelves




Stainless Steel
Handles



Height-Adjustable
Steel Leveling
Legs



Key



Wall Screw
(1/4" x 2.5")




Lock Washer
(1/4")




Lock Nut
(1/4")



Washer
(1/4")




Handle Bolt
(8-32 x 1")



Hex Bolt
(1/4" x 5/8")




Wood Screw
(#8 x 5/8")




Wall Washer
(1/4")

Tools Needed



1 x Adjustable wrench



1 x 12" Magnetic Leveler



1 x Stud Finder




1 x Tape Measure




1 x 7/16" Socket driver wrench



1 x 7/16" socket



1 x Pencil




1 x #2 Phillips Bit



1 x #2 Phillips head screwdriver



1 x Cordless Power Drill



1 x Hammer Drill



1 x Masonry Bit
[optional for masonry]

Manufacturer Warranty Limited Lifetime

When this product is installed, operated and maintained according to the instructions attached to or furnished with the product, NewAge Products Inc. will replace the defective product or parts if the part fails as a result of defective materials or workmanship for the Lifetime of the product.

NEWAGE PRODUCTS INC. WILL NOT PAY FOR:

1. Service calls to correct the installation of any NewAge products or to instruct you how to use or install them.
2. Damage resulting from improper handling or shipping of products, or products damaged by accident, misuse, abuse, fire, flood, improper installation, acts of God, neglect, corrosion, modification or mishandling.
3. Products damaged by improperly loading beyond the specified maximum weight capacity outlined in the instructions provided with the product.
4. Repairs or replacement when your product is used in other than normal, single-family household use, such as a commercial environment, or handled in anyway inconsistent with the installation instructions included with the product.
5. Cosmetic damage, including scratches, dings, dents or cracks in paint that do not affect the structural or functional capability of the product.
6. Surfaces damaged due to chemical interaction resulting in corrosion of paint or metal.
7. Replacement parts for NewAge products outside Canada and the United States.
8. Replacement keys or locking mechanisms.
9. Loss of product contents due to theft, fire, flood, accident or acts of God.
10. Shipping or freight fees to deliver replacement products or to return defective products.
11. Any labor costs during the limited warranty period.


DISCLAIMER OF IMPLIED WARRANTIES; LIMITATION OF REMEDIES

IMPLIED WARRANTIES, INCLUDING TO THE EXTENT APPLICABLE WARRANTIES OF MERCHANTABILITY OR FITNESS FOR A PARTICULAR PURPOSE, ARE EXCLUDED TO THE EXTENT LEGALLY PERMISSIBLE. ANY IMPLIED WARRANTIES THAT MAY BE IMPOSED BY LAW ARE LIMITED TO ONE YEAR, OR THE SHORTEST PERIOD ALLOWED BY LAW. SOME STATES AND PROVINCES DO NOT ALLOW LIMITATIONS OR EXCLUSIONS ON HOW LONG AN IMPLIED WARRANTY OF MERCHANTABILITY OR FITNESS LASTS, SO THE ABOVE LIMITATIONS OR EXCLUSIONS MAY NOT APPLY TO YOU. THIS WARRANTY GIVES YOU SPECIFIC LEGAL RIGHTS, AND YOU MAY ALSO HAVE OTHER RIGHTS WHICH VARY FROM STATE TO STATE OR PROVINCE TO PROVINCE


NEWAGE
PRODUCTS INC.

Installing the Feet


Parts Needed.

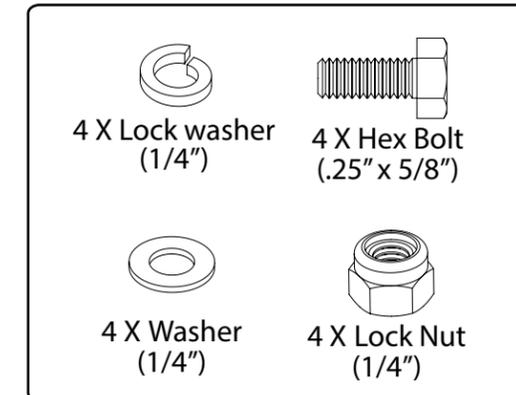


1 Open cabinet, remove any shelves or loose items.

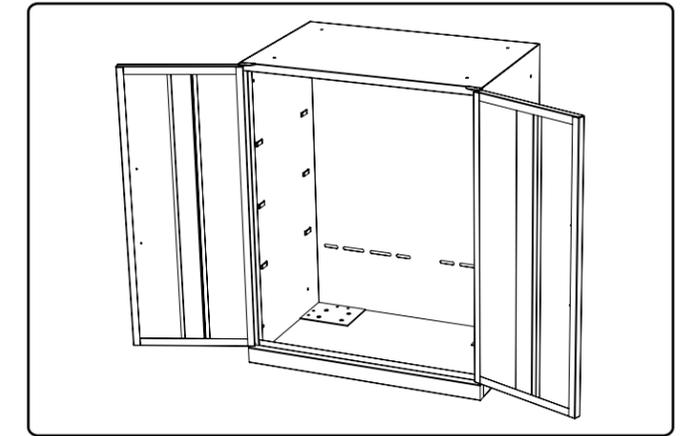


2 Flip cabinet upside down, locate holes at corners.

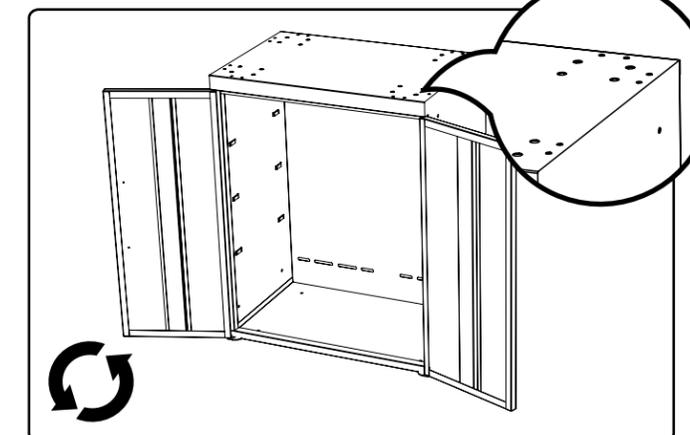


3 Align foot with edge of cabinet. Screw in 4 x Hex bolts with washer and lock washer.

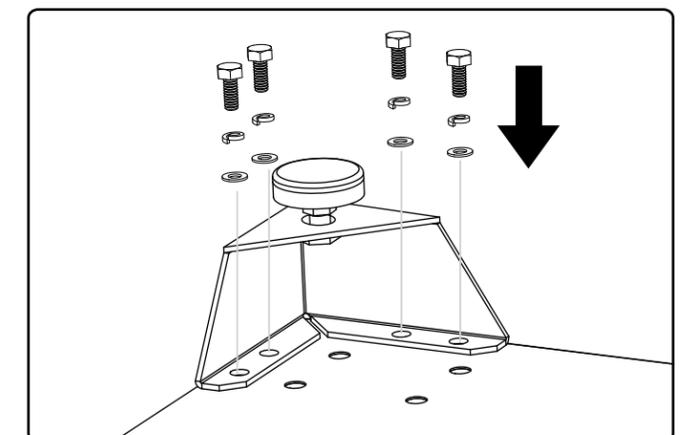

4 Repeat steps 3 for each corner.

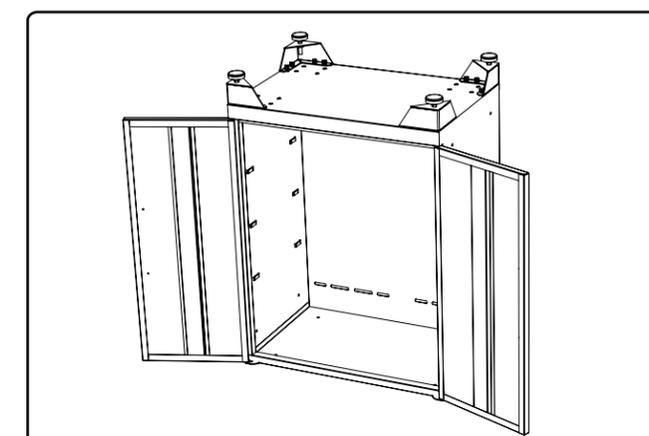


5 Stand & level feet.

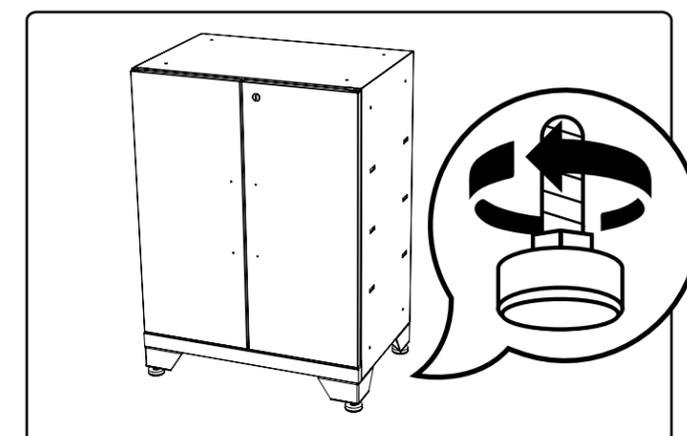


Installing the Handles


1 Parts Needed.

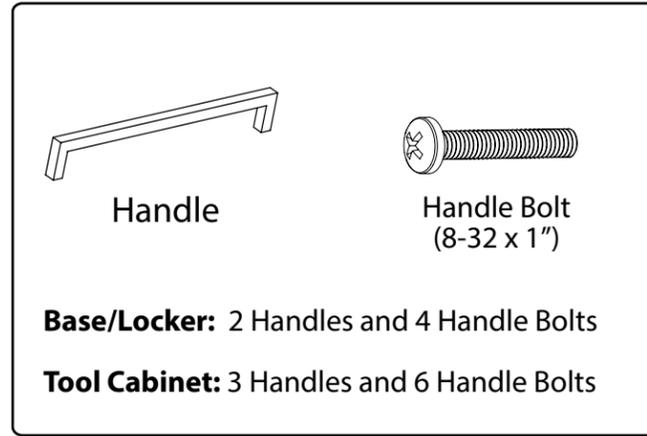

2 Align Handle to holes on doors or drawers.


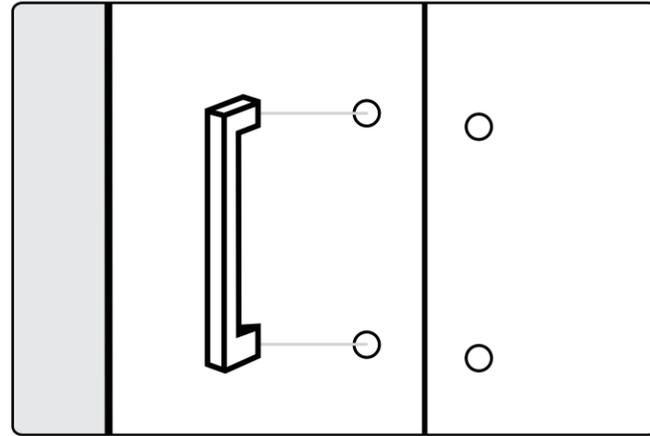


3 Screw in bolts.




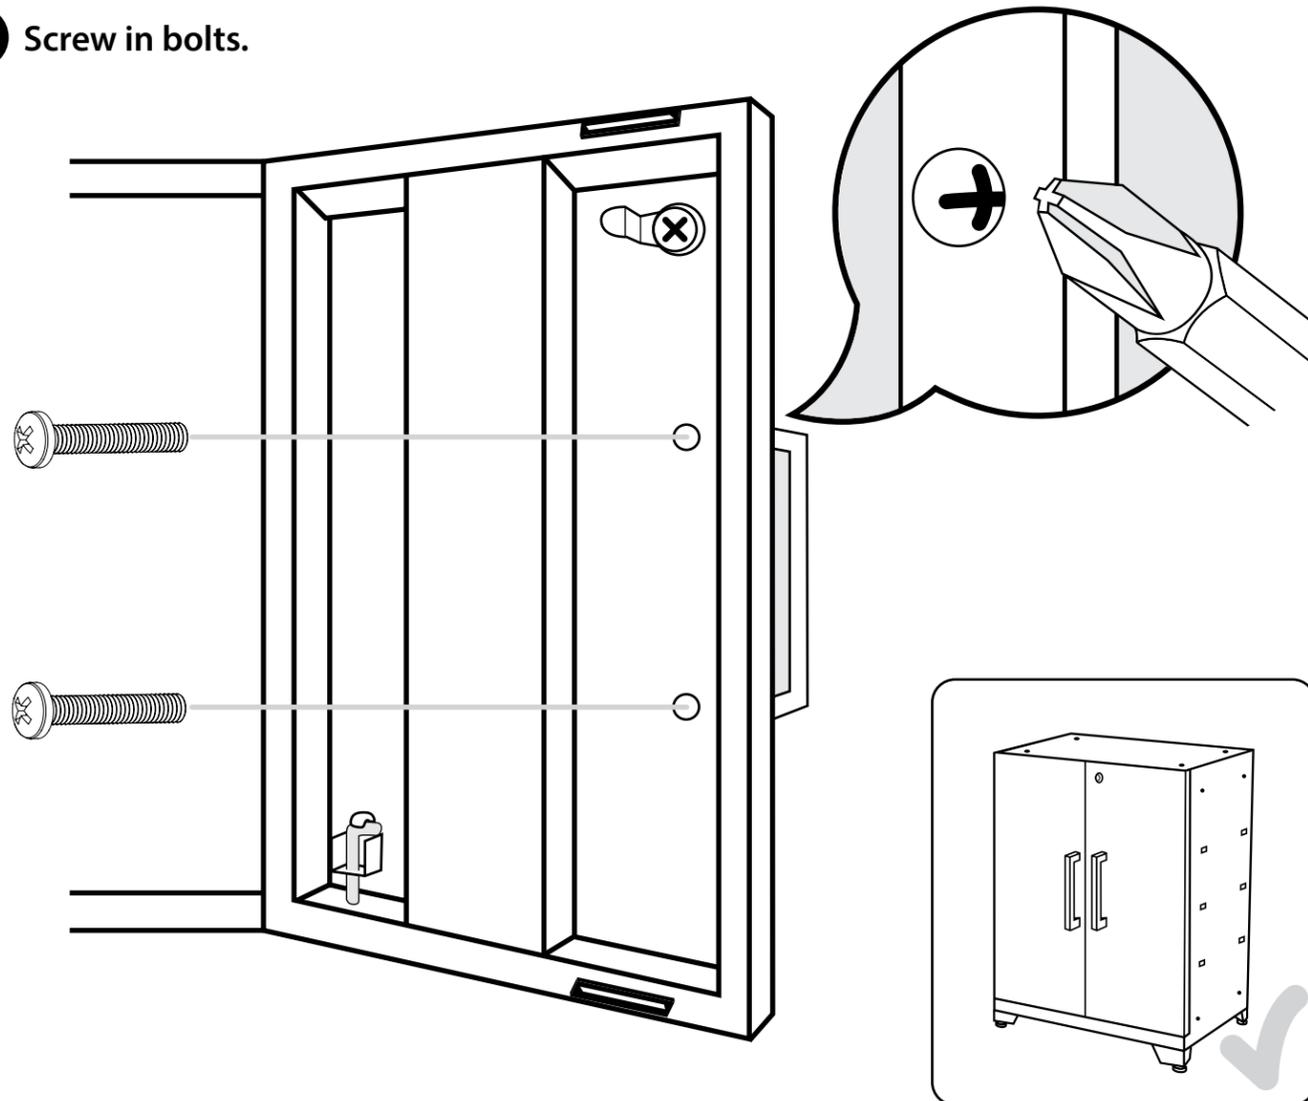


Installing the Drawers

Inserting Drawers.

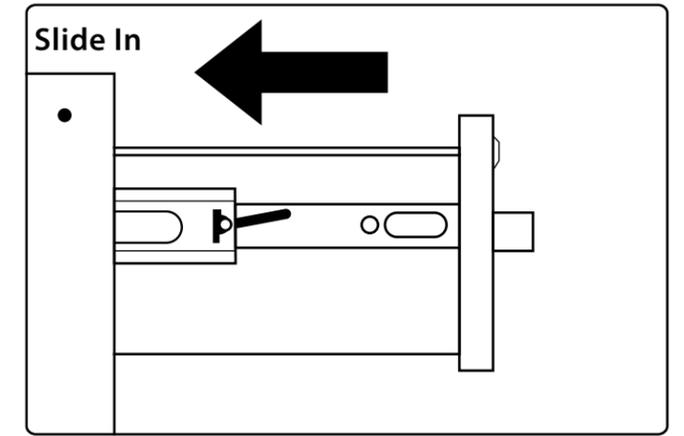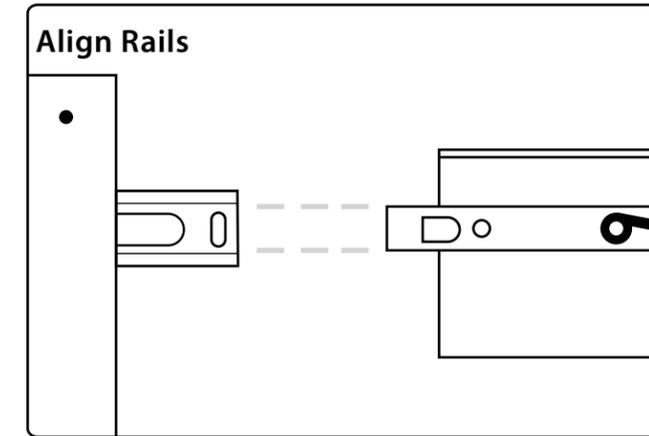


Removing Drawers.

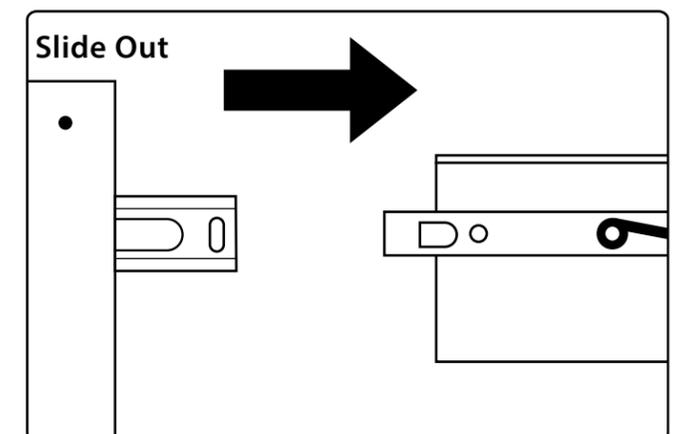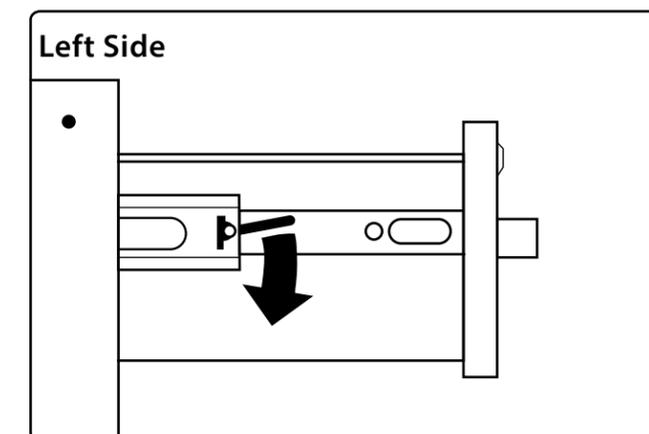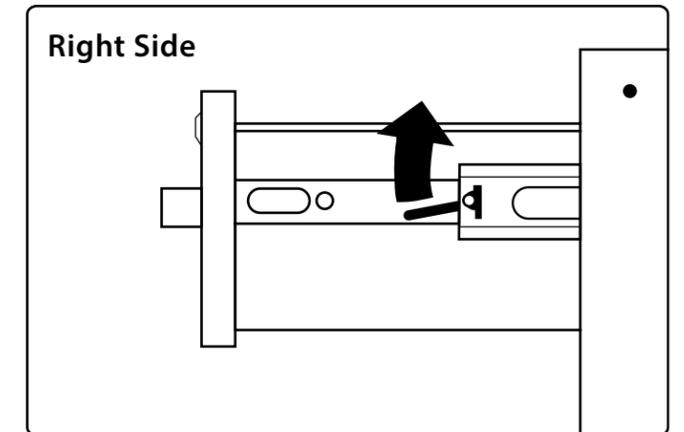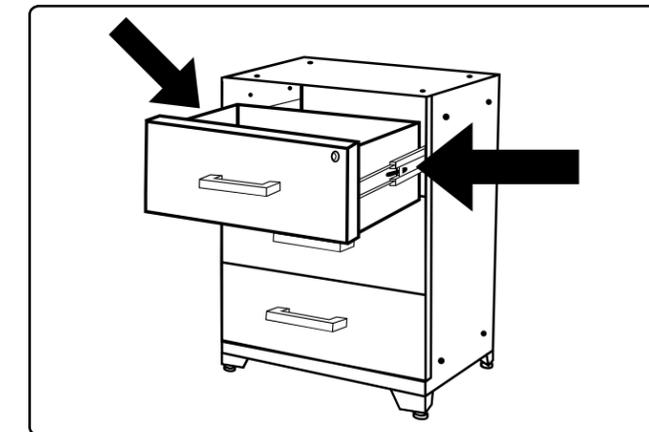


Fastening Cabinets

Note:
All drawers must be removed prior to fastening cabinets together.


1 Parts Needed.

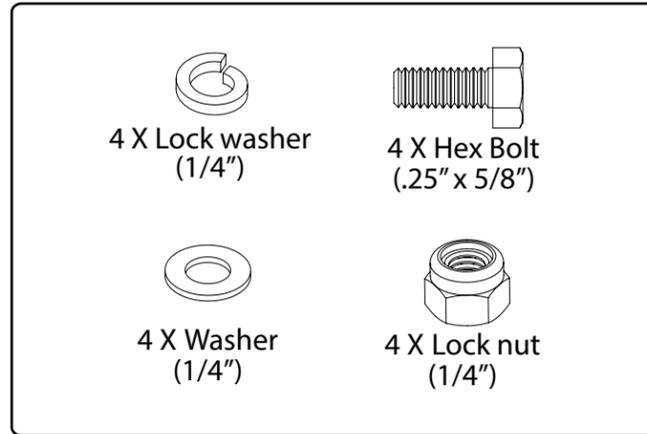


2 Remove plastic caps from cabinets.

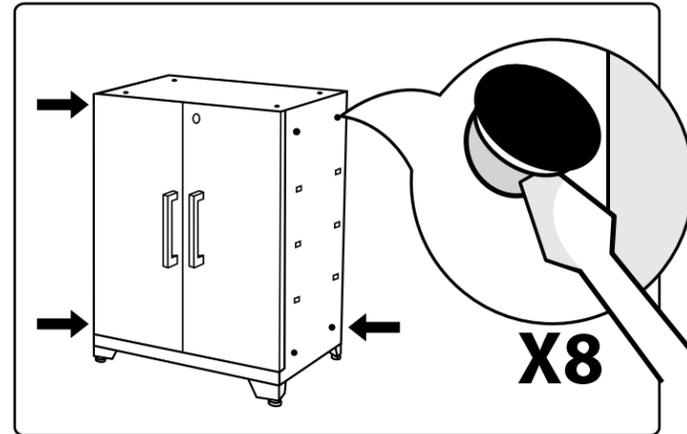

3 Align bolts, tighten lightly.

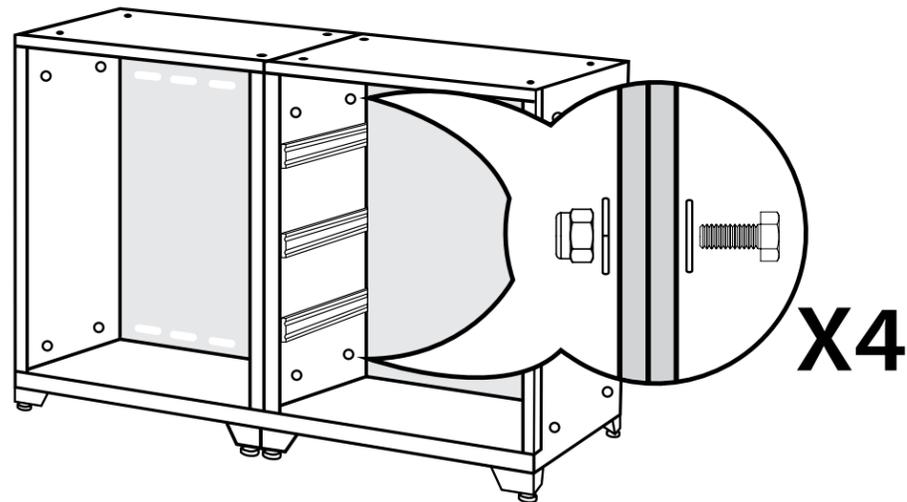


4 Level cabinets and tighten all bolts.

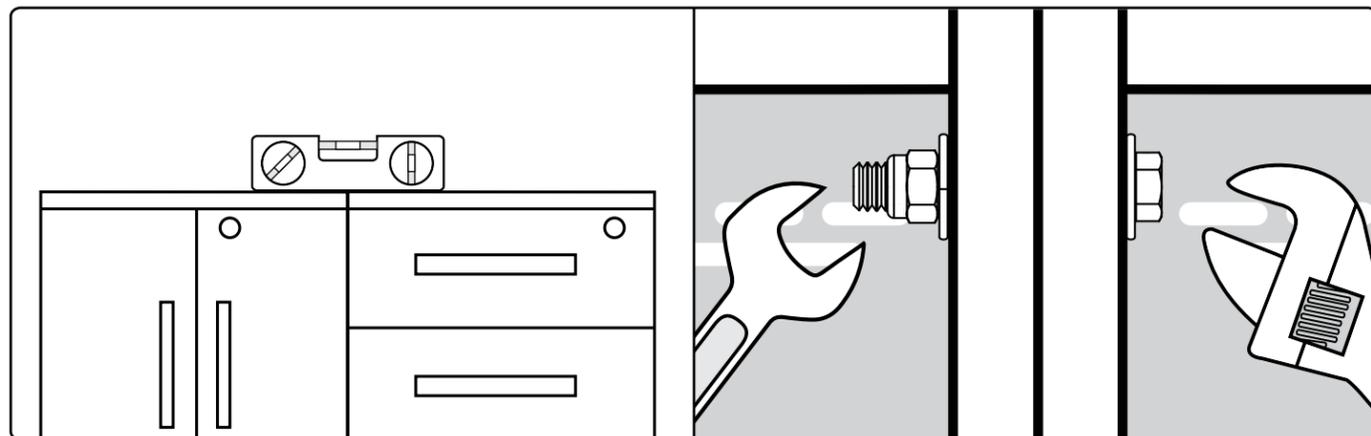


Installing Worktop Side Support Bracket

Note: Support Bracket Sold Separately
A support bracket is to be used if the worktop is added to the set without a secondary supporting base/tool cabinet.


Parts Needed.

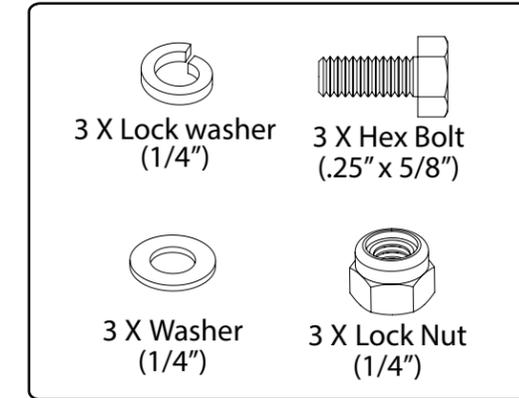


1 Open locker and locate slots on either side.

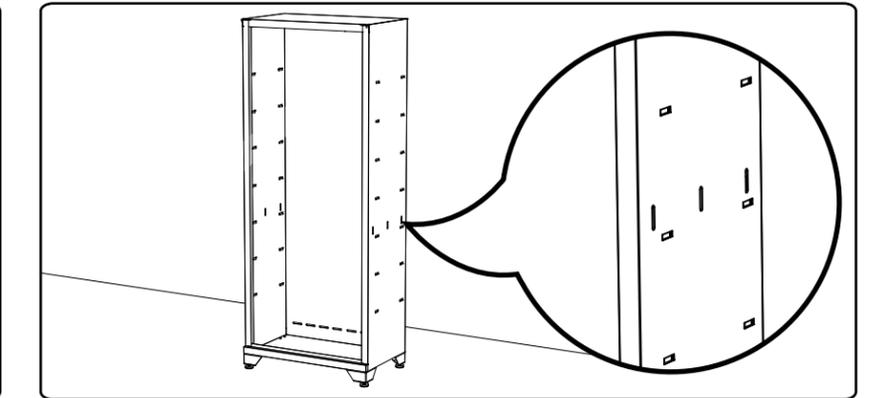


2 Align bracket.

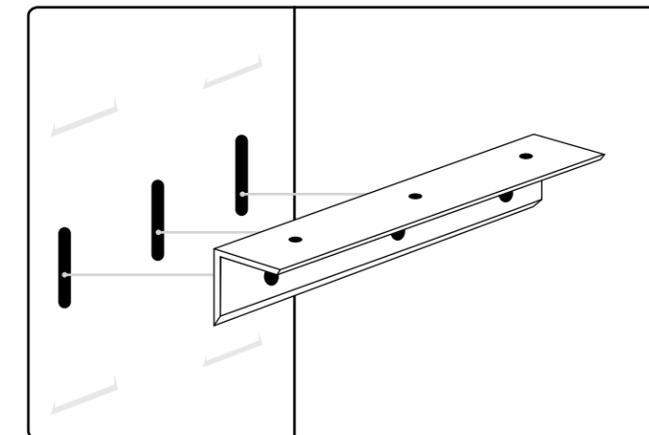


3 Fasten nuts, bolts, and lock washers.

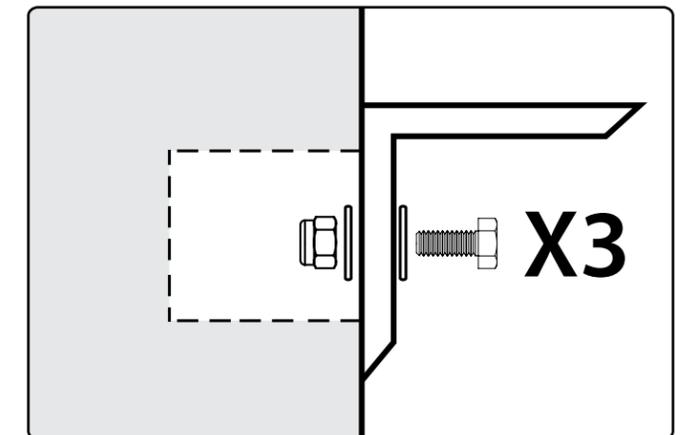

5 Level bracket and ensure it is at the same height as the base cabinet.

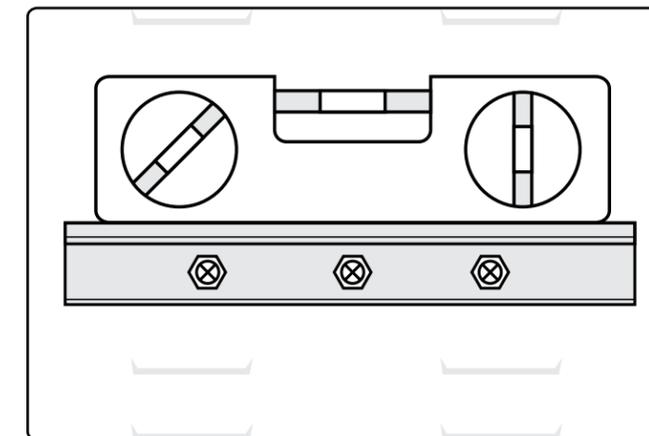


4 Tighten nuts & bolts.

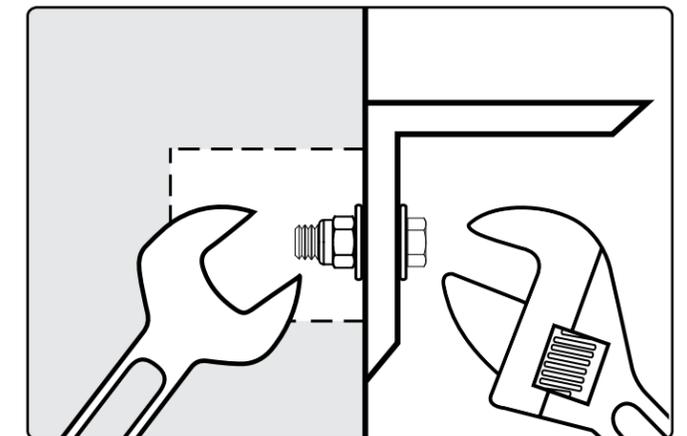


Mounting the Worktop (On 2 Cabinets)



1 Place Worktop on cabinets.

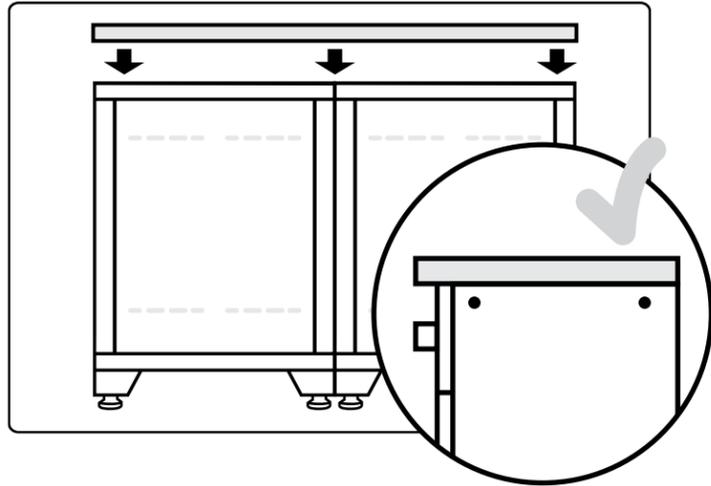

2 Locate 2 punch holes both sides.


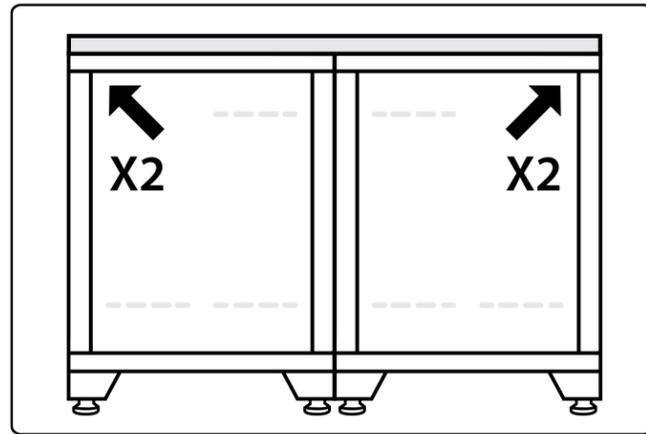


3 Drill into the worktop using the #8 x .5/8" wood screws.

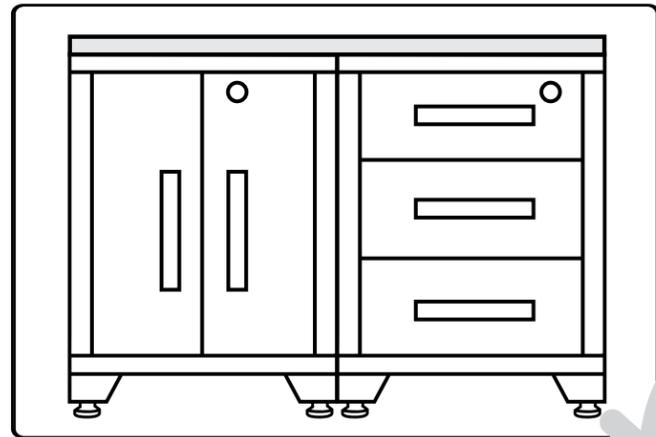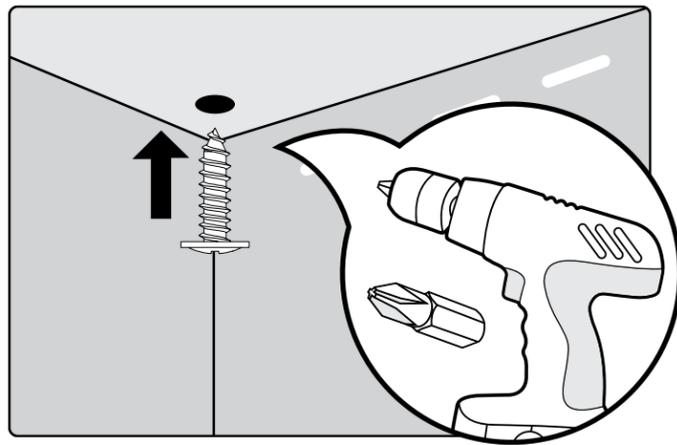


i Optional: For locker support bracket.

Use 3 washers & #8 x 5/8" wood screws. Provided in the locker packaging.

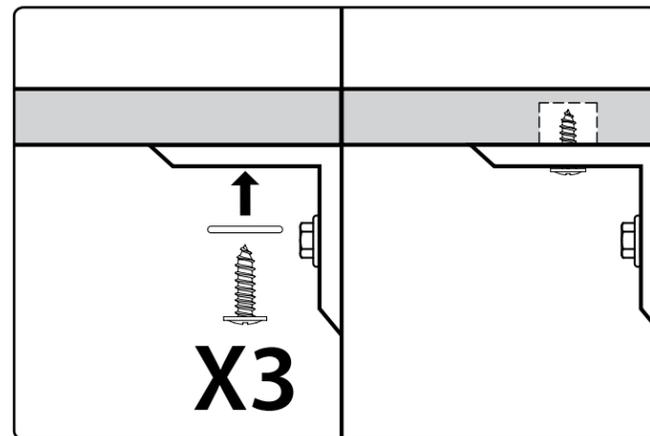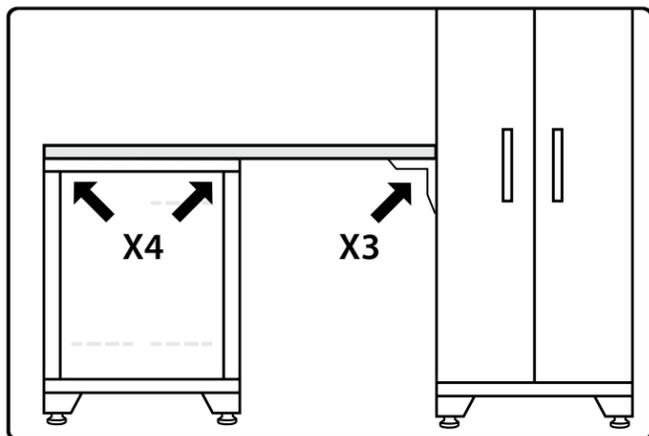


Inserting Cabinets Shelves


1 Stand cabinet up.

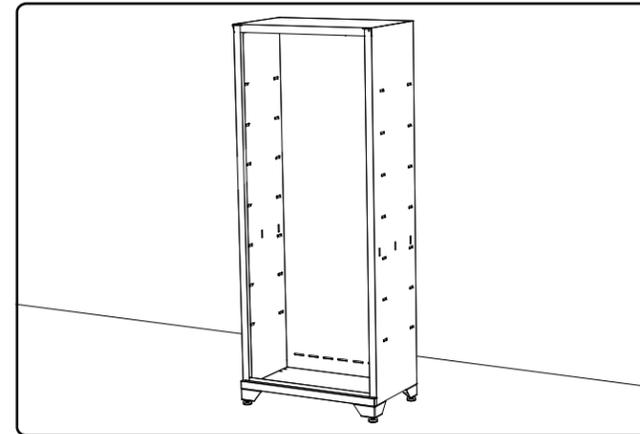


2 Insert shelf on 45 degree angle.

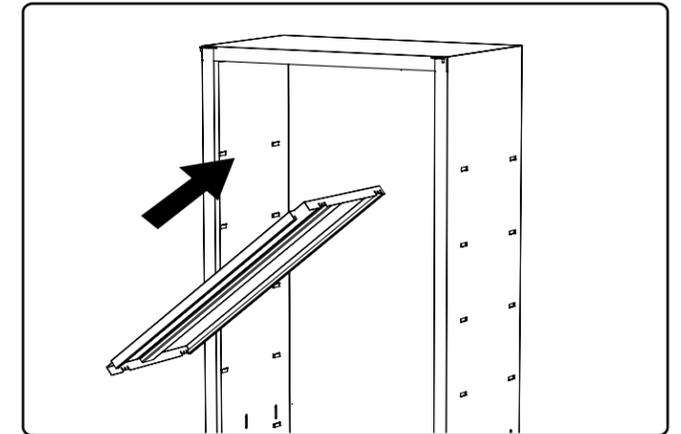


3 Rotate shelf to horizontal position.

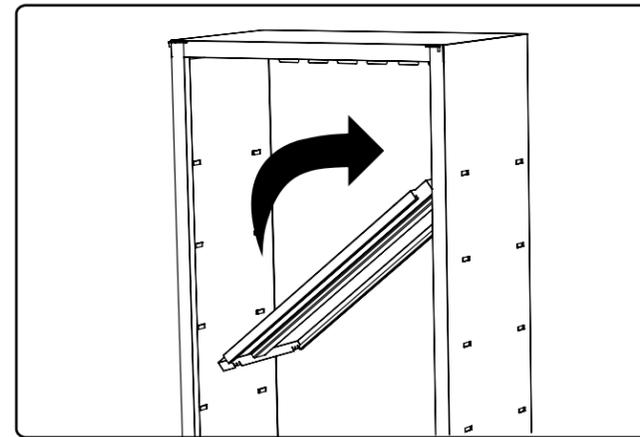


4 Push shelf down into grooves.

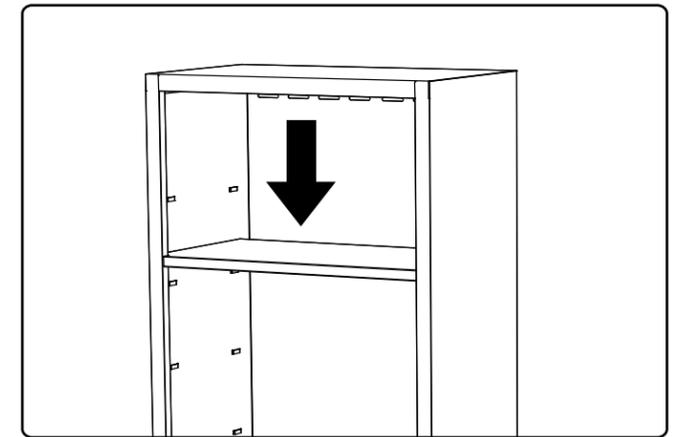

5 Ensure shelf is secure.

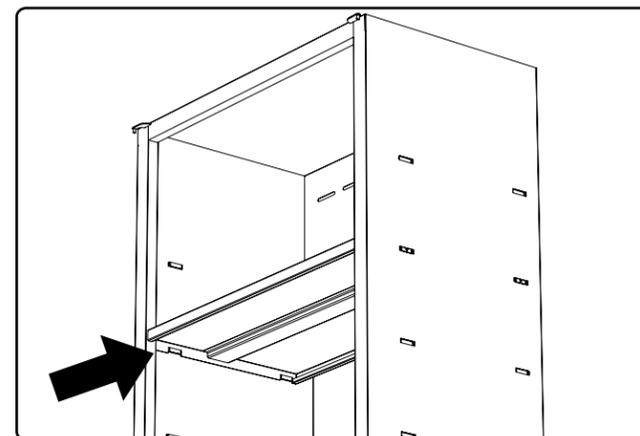


6 Insert remaining shelves.

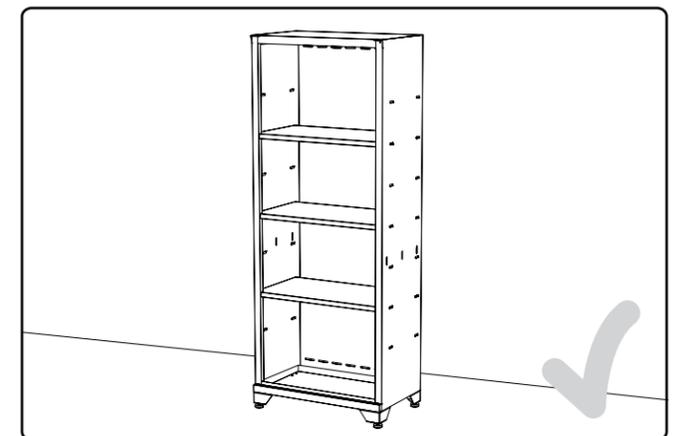


Mounting Cabinets (Drywall/Studded Wall)


1 Use stud finder to locate the studs and mark the wall with a pencil.

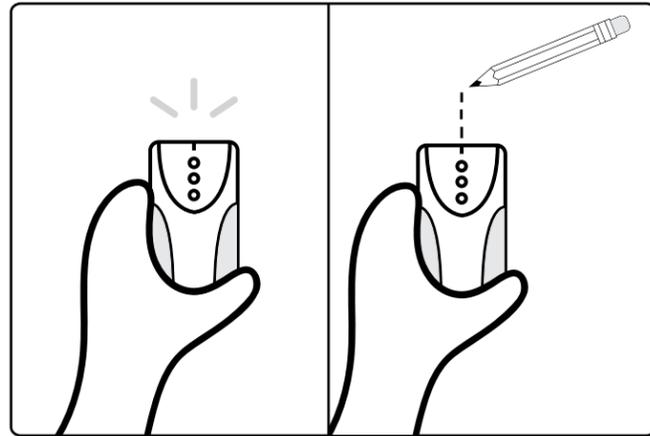


2 Gather parts.

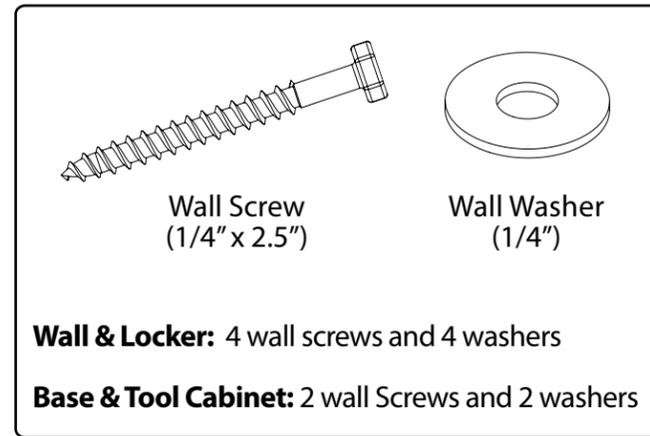


3 Place cabinet tight against the wall.

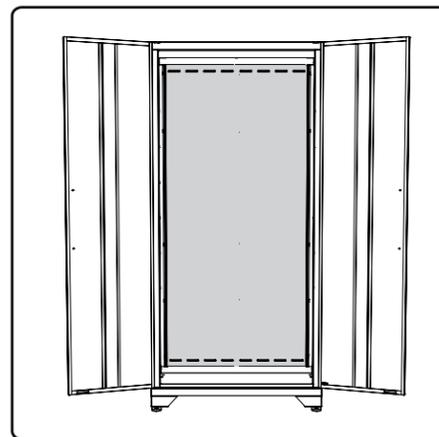


4 Align cabinet to stud marks.

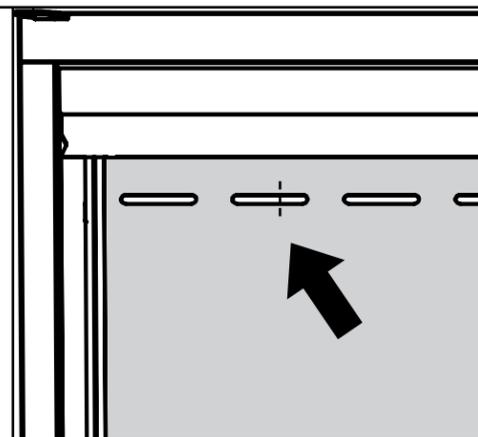

5 Level cabinet

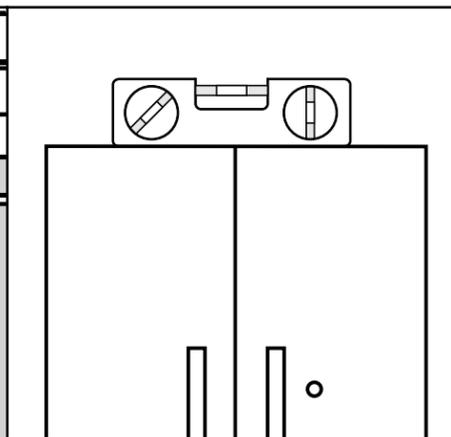

6 Drill 4 wall screws and washers through perforated holes into studs.

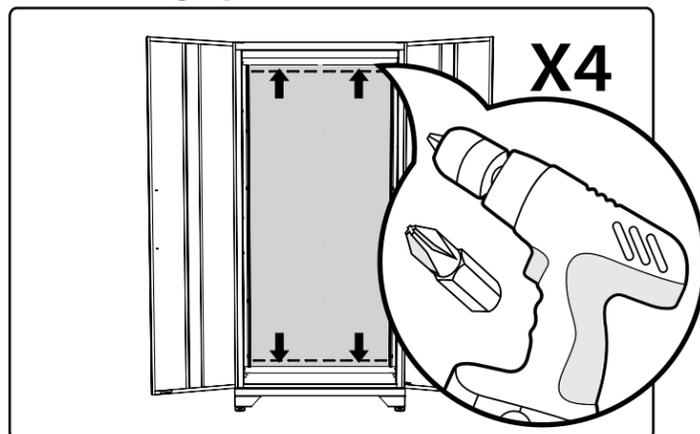

i Masonry.


- Follow steps 1 to 5.
- Drill 4 pilot holes through the perforated strip with hammer drill & masonry bit.
- Use 4 x (2 1/4" x 1/4") Tapcon Concrete Anchor into wall. (Not Included)
- OR 4 x (#10 x 2") Screw with 3/16" masonry plug into wall. (Not Included)
- Follow Step 6.

Fastening Cabinets (Optional)




Note: Fasten additional cabinets to initial securely mounted cabinet.

i Parts Needed.

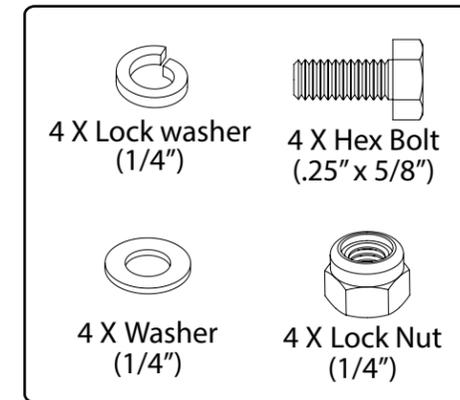

1 Align bolts, tighten lightly.

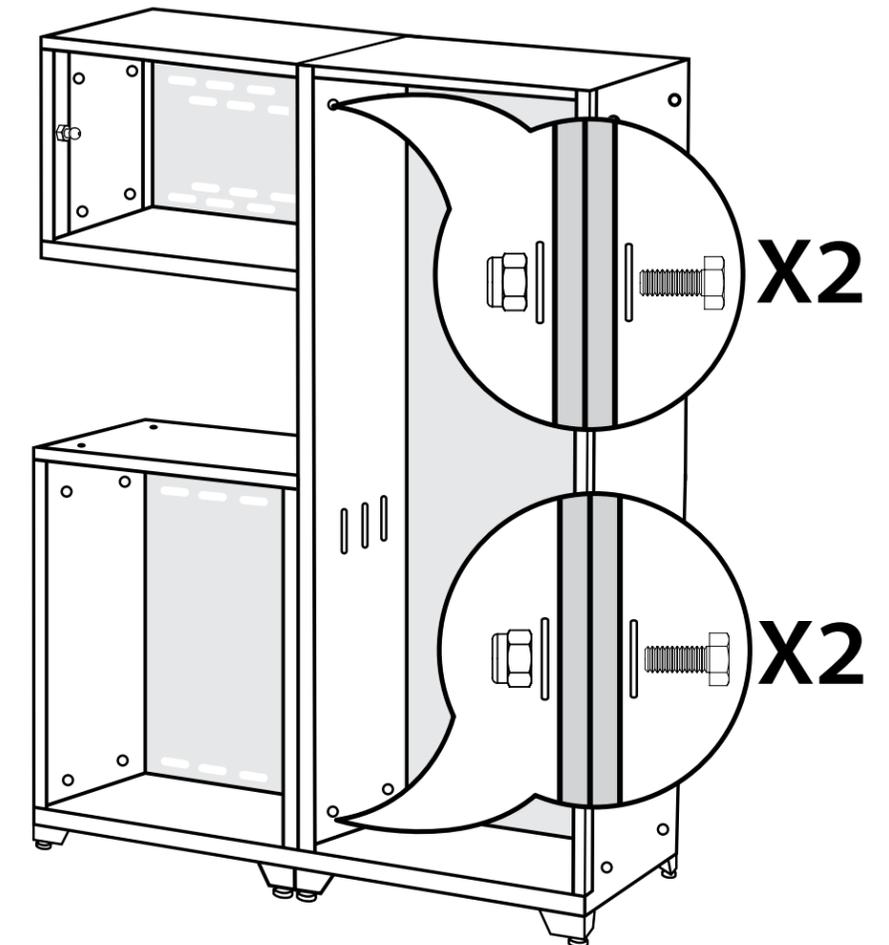

2 Level cabinets and tighten all bolts.

