

Oceanic HYDRO-PAL & Portable RO/RODI Instruction Guide

PLEASE RETAIN THIS SHEET FOR FUTURE USE AND INFORMATION ABOUT REPLACING FILTERS

OVERVIEW

The Oceanic HYDRO-PAL and Portable RO uses replaceable Sediment, Carbon and RO Membrane cartridges. The Sediment and Carbon cartridges are self-contained. The RO Membrane is located in the center canister.

The Oceanic HYDRO-PAL and Portable RO should only be connected to a cold-water supply. The optimal water temperature is 77°F. Using other water temperatures will diminish the effectiveness of the filtration and can accelerate degradation of the membrane.

Use care to not over tighten the threaded connections- in particular the elbow connections. If once installed the system should leak, use plumber's Teflon tape on the threaded fittings.

When using a new Carbon Cartridge, remove the Membrane and run water through the carbon to rinse out any possible carbon dust.

Protect the Membrane from freezing and from drying out. After its first use, the Membrane must never be allowed to dry out. If the reverse osmosis system will not be active for more than 10 – 15 days, store in a protective solution (filtered RO Water in a zip lock bag- place in the crisper of your refrigerator) which maintains the efficiency of the osmosis unit by inhibiting bacterial growth and prevents the deposition of impurities.

Do not leave the HYDRO-PAL unattended during use.

Reverse Osmosis technology alone cannot eliminate unusually high concentrations of individual components, for example, high levels of silica and nitrate. To remove residual dissolved solids from reverse osmosis water, an additional deionization filter can be utilized.

Oceanic HYDRO-PAL (RODI) or Portable RO's WITH A DI FILTER*: Do not use water for human consumption. Minerals will be depleted from the water and it is not safe or tasty to drink DI water.

Use only original replacement parts. Change the Sediment and Carbon Cartridges regularly. The activated carbon serves to remove chlorine, which, if allowed to pass, would cause irreparable damage to the microstructure of the Membrane.

PARTS LIST:
Pre-Assembled RO Unit
Sediment Cartridge
Carbon Cartridge
RO Membrane Housing
Optional 4 th Stage: DI, Alkaline, or Post Carbon Inline
Membrane Filter (Separately Packaged)
Garden Hose Connection (Optional: Faucet Adapter)
Installation & Maintenance Guide
Optimal Water Pressure: 60 PSI
Maximum Water Pressure: 100 PSI
Optimal Water Temperature: 77°F (25°C)

Replacement Filters: Every 4-6 Months


OCEANICWATER.COM

- 2 Replacement Inline Filters for Oceanic 3-Stage HYDRO-PAL Portable & Mini Reverse Osmosis 2"x10":
MODEL# **2INSEDCARB**
- 3 Replacement Inline Filters for Oceanic 4-Stage Portable & Mini Reverse Osmosis 2"x10":
MODEL# **3INSEDCAR**
- 3 Replacement Inline Filters for Portable 4-Stage Aquarium *RODI* Reverse Osmosis 2"x10":
MODEL # **REFSEDCARBDI**
- 3 Replacement Inline Filters for Oceanic Portable & Mini *Alkaline* Reverse Osmosis 2"x10":
MODEL # **REFSEDCARBALK**
- To Add a Manual Flush Valve:
MODEL# **MANFLUSHV**

Oceanic HYDRO-PAL & Portable RO/RODI Instruction Guide

INSTALLATION The Oceanic HYDRO-PAL uses replaceable Sediment, Carbon and RO Membrane cartridges. The Sediment and Carbon cartridges are self-contained. The RO Membrane is located in the center canister.

- 1) Mount or place the HYDRO-PAL or Portable RO to a solid surface.
- 2) After the tubing is detached, remove the Membrane Housing Lid.
- 3) Remove the Membrane from the plastic bag and insert into the Membrane Housing. (The end with the 2 O-Rings should be inserted first)
- 4) Replace the Membrane Housing Lid and tighten. Reattach the tubing. It is important to ensure the Membrane is fully inserted into the canister before screwing the lid onto the housing.
- 5) Connect the Garden Hose Adapter to a standard threaded garden hose. Insert Red 1/4" Tubing into the Garden Hose Adapter.
- 6) Connect the Blue/White 1/4" Tubing to the Filtered Water connection and the Black 1/4" Tubing to the Waste Water connection.

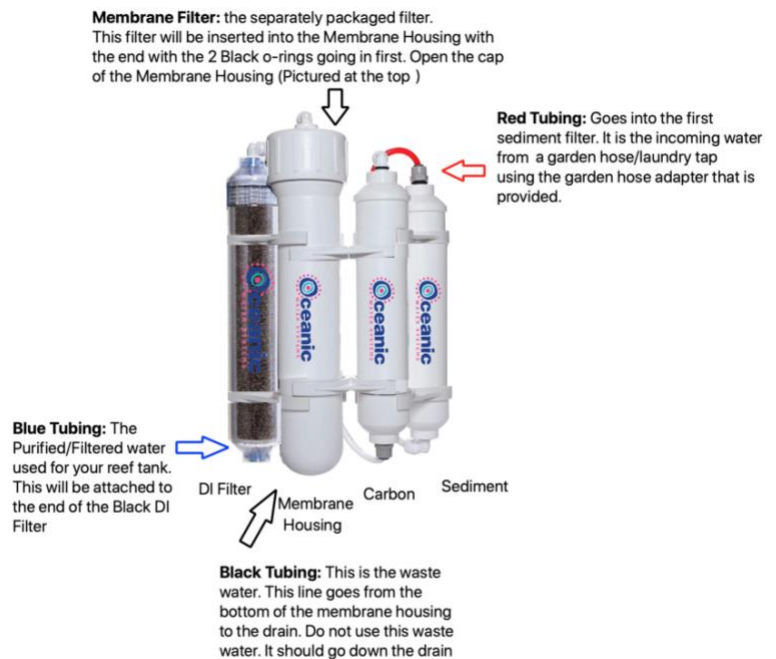

Color Coded Tubing:

Red: Intake from water line (Faucet or Garden Hose)

Black: Waste Water. Can be slipped down the drain.

Blue/White/Yellow: (Purified Line) Attach to Container of Choice or Spout

Oceanic Water Systems, LLC warrants that this Reverse Osmosis Unit (excluding cartridges and membrane) shall be free from defective electrical components and leaks or cracks due to defects in materials or workmanship for a period of twelve (12) months from the date of purchase. If a defect is shown, Oceanic Water Systems, LLC will, at Oceanic Water Systems' sole discretion, either repair or replace the product without charge. No cash refunds will be made. This warranty is provided solely to the original consumer purchaser of the product and may not be transferred or assigned.

This warranty does not apply to damage resulting from accident, misuse, abuse, lack of reasonable care, failure to follow safety and installation instructions. This warranty will not be effective unless and until the Oceanic product is shown to have been used in accordance with the safety and installation instructions accompanying the product.

THIS CONSTITUTES OCEANIC WATER SYSTEM'S ENTIRE WARRANTY AND OCEANIC WATER SYSTEMS MAKES NO OTHER WARRANTIES, WHETHER EXPRESSED OR IMPLIED, WITH RESPECT TO THE PRODUCT. OCEANIC WATER SYSTEMS, LLC SPECIFICALLY DISCLAIMS ANY AND ALL IMPLIED WARRANTIES, INCLUDING, WITHOUT LIMITATION, WARRANTIES OF MERCHANTABILITY AND FITNESS FOR A PARTICULAR PURPOSE. IF OCEANIC WATER SYSTEMS, LLC CANNOT LAWFULLY DISCLAIM IMPLIED WARRANTIES UNDER THIS LIMITED WARRANTY, ALL SUCH WARRANTIES, INCLUDING WARRANTIES OF MERCHANTABILITY AND FITNESS FOR A PARTICULAR PURPOSE ARE LIMITED IN DURATION TO THE DURATION OF THIS WARRANTY.

OCEANIC WATER SYSTEMS IS NOT RESPONSIBLE FOR DIRECT, SPECIAL, INCIDENTAL OR CONSEQUENTIAL DAMAGES RESULTING FROM ANY BREACH OF WARRANTY OR CONDITION, OR UNDER ANY OTHER LEGAL THEORY. OCEANIC WATER SYSTEM, LLC EXPRESSLY DISCLAIMS ALL ALLEGED DAMAGES FOR LOSS OF MARINE LIFE, PERSONAL INJURY, AND/OR PROPERTY DAMAGE.

Some states and provinces do not allow the exclusion or limitation of incidental or consequential damages or exclusions or limitations on the duration of implied warranties or conditions, so the above limitations or exclusions may not apply to you. This warranty gives you specific legal rights, and you may also have other rights that vary by state or province.

Oceanic Water Systems, LLC shall not have any obligations under this warranty unless the owner notifies Oceanic Water Systems, LLC in writing of any alleged defect(s) within 30 days of discovery of the defect(s). Any notice to Oceanic Water Systems, LLC must be delivered by United States or electronic mail to the following address: U.S. Mail: Oceanic Water Systems 7623 Fulton Ave, North Hollywood, California 91605 or electronic mail: support@oceanicwater.com. Oceanic Water Systems, LLC shall be allowed a reasonable period of time to investigate any warranty claim and to perform any testing Oceanic Water Systems, LLC deems necessary to determine the cause of the defect. This warranty shall be interpreted under the laws of the State of California.