


First Step™ Premium 3-in-1 Underlayment

For concrete slabs and wood subfloors (on grade or above grade).

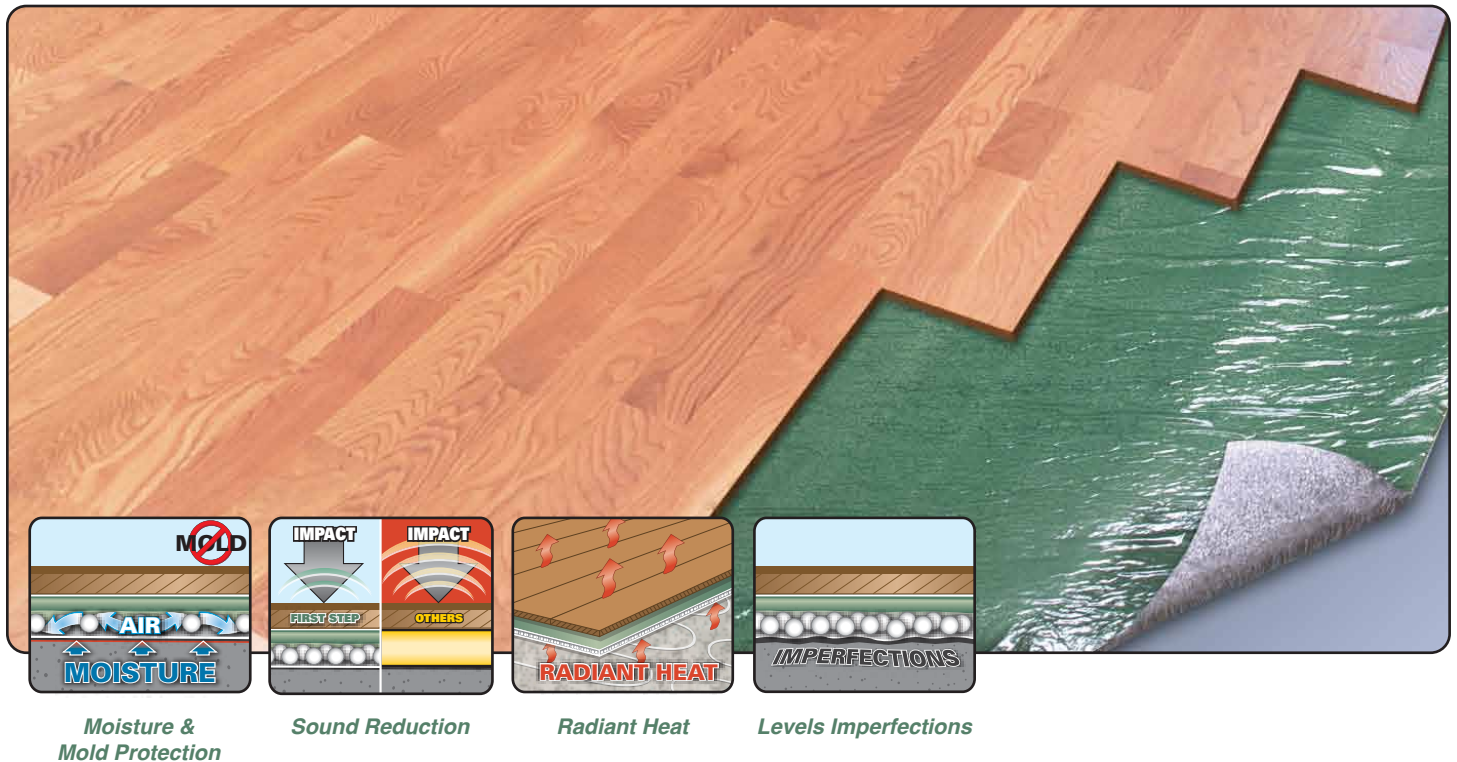

Moisture &
Mold Protection

Sound Reduction

Radiant Heat

Levels Imperfections

In the growing market of laminate and engineered hardwood floating floors, the biggest concerns are noise/sound and water/mold damage. Roberts Underlayments are engineered to meet the highest standards in sound reduction, moisture protection, comfort and even minor sub-floor corrections.

The First Step to a Healthy Floor

Item Code:	70-102-12	70-102-1
Unit of Measure:	12 rolls per case	Roll
Coverage:	100 sq ft per roll 1200 sq ft per case	630 sq ft per roll
Width of roll:	40"	40"
Length of roll:	30 feet (360")	189 feet (2268")
Thickness:	1/8"	1/8"
Weight per roll:	3 lbs. 10 oz.	21 lbs.
Diameter of roll:	7-1/8"	16-1/2"

TECHNICAL SPECIFICATIONS

STC (Sound Transmission Loss Test)	67
IIC (Impact Sound Transmission Test)	68
R-Value**	0.39

Both tests measure sound transference from an upper level room to a lower level room. The IIC measures sound such as moving furniture and walking, while the STC measures sound such as voices and television. Minimum sound rating required by most building codes and architects is 50.

***Compression Test Results** - In a standardized test using 1,320 lbs. of pressure, First Step Underlayment retained 96% of its original thickness after seven days, compared to only 57% by a leading 2-in-1 foam product.

****R-Value** - Rating used to measure resistance to heat flow.