

---

# Use and Care Guide

## Moore Haven Woven Square Firepit Table

Product Code: D71 M20360

KSN: 0-08760804-8

UPC Code: 0-5087452523-9

Date of Purchase: \_\_\_\_/\_\_\_\_/\_\_\_\_

## Thank you for your purchase

---

### **Thank you for your purchase!**

We are pleased that you have chosen Sears for your outdoor furniture purchase. We hope that you enjoy the unmatched quality, comfort, and style of your new patio set. Every piece is meticulously considered all the way down to the smallest details, exclusively for you, by our world class design team. We know you have a choice when it comes to your patio furniture needs, so from our team to yours, thank you for letting us be a part of your outdoors.

## Table of Contents

---

<b>Table of Contents.....</b>	<b>2</b>
<b>Firepit Important safety information.....</b>	<b>3</b>
Important safety information.....	3
Important about propane.....	4
Specifications .....	4
Batteries.....	5
Lighting Instructions.....	5
Maintenance.....	6
Troubleshooting Guide.....	6
Warranty.....	7
<b>Pre-Assembly.....</b>	<b>8</b>
Planning Assembly.....	8
Hardware Included.....	8
Package Contents.....	10
<b>Assembly Instructions</b>	
<b>Firepit Table.....</b>	<b>11</b>
<b>Customer Service.....</b>	<b>16</b>

## Firepit Important safety Information

---

### IMPORTANT SAFETY INFORMATION

The installation must conform with local codes or, in the absence of local codes, with the National Fuel Gas Code, ANSI Z223.1/NFPA 54; International Fuel Gas Code. ; Natural Gas and Propane Installation Code, CSA B149.1; or Propane Storage and Handling Code, B149.2, as applicable).

The appliance must be isolated from the gas supply piping system by closing its equipment shutoff valve during any pressure testing of the gas supply system at test pressure equal to or less than 1/2 psi (3.5kPa).

The appliance area must be kept clear and free from combustible materials, gasoline and other flammable vapors and liquids.

Do not use this appliance if any part has been under water. Immediately call a qualified service technician to inspect the appliance and to replace any part of the control system and any gas control which has been under water.

**Children and adults should be alerted to the hazards of high surface temperatures and kept at a safe distance to avoid burns or clothing ignition.**

**Young children should be carefully supervised when they are anywhere near the appliance.**

**Clothing or other flammable material should not be hung from the appliance, or placed on or near the appliance.**

**Any screen or guard removed for servicing an appliance must be replaced prior to operating the appliance.**

**Installation and repair should be done by a qualified service person. The appliance should be inspected before use and at least annually by a professional service person. More frequent cleaning may be required as necessary. It is imperative that the control compartments, burners and circulating air passageways of the appliance be kept clean.**

Do NOT burn solid fuels in this gas fireplace.

**CAUTION:** The propane gas pressure regulator provided with this appliance must be used. This regulator is set for an outlet pressure of 11 inches water column.

This outdoor gas appliance is not intended to be installed in or on recreational vehicles and/or boats.

Before each use of this gas appliance, open the LP (Liquid Propane) Tank Drawer and inspect the LP Hose. If there is evidence of excessive abrasion or wear, or the hose is cut, it must be replaced prior to the gas appliance being put into operation. Use only the replacement hose assembly specified in this manual. Inspect the burner before each use of the appliance. The burner must be replaced prior to the appliance being put into operation if it is evident that the burner is damaged. Use only the burner listed in these instructions.

Keep the fuel supply hose away from any heated surfaces.

## Firepit Important safety Information

### IMPORTANT SAFETY INFORMATION ABOUT PROPANE (LP) GAS

A self contained LP-gas cylinder for use with this appliance must have a capacity of 20 lbs. and must be equipped with a Type 1 connector and an OPD (overfill protection device).

The LP-gas supply cylinder to be used must be constructed and marked in accordance with the specification for LP-gas cylinders of the U.S. Department of Transportation (DOT) or the National Standard of Canada, CAN/CSA-B339, Cylinder, Sphere and Tubes for the Transportation of Dangerous Goods.

- The cylinder supply system must be arranged for vapor withdrawal.
- The cylinder used must include a collar to protect the cylinder valve.
- This appliance shall be used only outdoors in a well-ventilated space and shall not be used in a building, garage or any other enclosed space.
- When this appliance is not in use, the gas must be turned off at the supply cylinder.
- Storage of this appliance indoors is permissible only if the cylinder is disconnected and removed from the appliance.
- Cylinders must be stored outdoors in a well-ventilated area out of the reach of children. Disconnected cylinders must have threaded valve plugs tightly installed and must not be stored in a building, garage or any other enclosed areas.

CSA (Canadian Standards Association) certified to ANSI Z21.97•CSA 2.41-2012  
“Outdoor Decorative Gas Appliances”

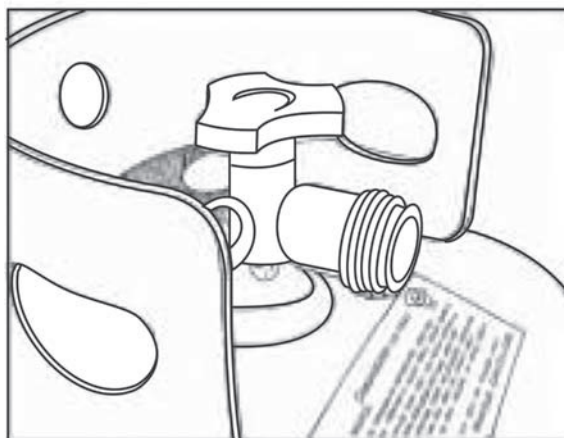


Figure 1

### SPECIFICATIONS

INPUT	40,000 Btu/hr	30,000 Btu/hr Low fire
Propane Regulator Pressure	11 inches water column	
Clearances to combustible surfaces	Sides 24in./61cm	Top: 72 in. / 183 cm

## Firepit Important safety Information

### BATTERIES

Make sure the control knob is in the "OFF" position. Unscrew the push button cap on the ignition module located on the control panel to access the battery compartment. The ignition module requires one Alkaline AAA size battery (1.5V). The negative (-) end goes in first. See Figure 11. Dispose of battery safely. May explode or leak if charged or disposed of in fire. Make sure of the polarity. Mercury and cadmium free.

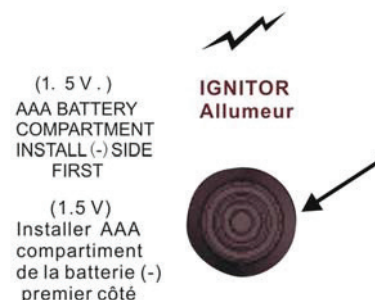


Figure 13

### LIGHTING INSTRUCTIONS

**Warning:** If these instructions are not followed exactly, a fire or explosion may result causing property damage, personal injury or loss of life.

1. Make sure the control knob is in the "OFF" position. See Figure 14 Open the tank valve all the way.



Figure 14

2. Push in the igniter button. You will hear a slight clicking sound. With the igniter button pushed in, push and turn the control knob to the "ON" position. the fire should light within a few seconds. Once the flame is lit, release the igniter button and continue to hold the control knob in for 10 to 15 seconds. Release the control knob. The control knob should pop back out and then remain lit.

**Note:** If the fire does not light, turn the knob to the "OFF" position and wait five (5) minutes before trying again.

3. To turn down the flame, push the control knob in slightly and turn to Medium (medium or Low (small flame)).
4. To shut down the fire pit, turn the control knob to the "OFF" position and turn off the tank valve.

## Firepit Important safety Information

### MAINTENANCE

The flames should look like those in Figure 15. To clean the burner, use a soft brush after the burner has cooled completely. Never use a vacuum cleaner on the burner. It is recommended that the fire pit be stored indoors during the winter if it will be subjected to freezing temperatures. The LP cylinder must be disconnected and removed from the appliance before the appliance can be stored indoors.



Figure 15

Always purchase the correct size and grade of battery most suitable for the intended use. Replace all batteries of a set at the same time. Clean the battery contacts and also those of the device prior to battery installation. Ensure batteries are installed correctly with regard to polarity (+ and -). Remove batteries from equipment which is not to be used for an extended period of time. Remove used batteries promptly.

### TROUBLESHOOTING GUIDE

PROBLEM	CAUSE	REMEDY
Burner won't light	No Propane Gas at Burner	Check that gas tank valve is open. Turn control knob to "ON" and push control knob in. Make sure tank has propane gas.
	No Spark at Electrode	Check that AAA battery is installed with negative (-) end first and has a charge. Check that the wire is connected to the ignition module. Check that the electrode is not cracked or broken.
Burner won't stay lit after lighting	Thermocouple not in flame	Check that the tip of the thermocouple is even with the top of the ignition well. Remove any lava rocks from the ignition well.
	Thermocouple connection at the main control valve is loose	Tighten the thermocouple nut at the back of the valve.
	No Lava Rocks on Burner	Cover the burner with lava rocks per the instructions

# Firepit Important safety Information

---

Manufactured by: Agio-USA

1337 Taylor Farm Rd.#100  
Virginia Beach, VA 23453

Made in China

1-800-416-3511

## **90-DAYS LIMITED WARRANTY**

### What is Covered Under This Warranty?

Firepits are warranted against defects in material or workmanship for 90 days.

### How Do I Obtain Warranty Service?

To obtain warranty service, you must contact our customer service center within the relevant warranty period and provide us with a copy of your dated register receipt as proof of the purchase date. We reserve the right to request photographs and/or return of the defective item(s) and/or such other evidence relating to any claim as we shall reasonably require. Please call our customer service center at 1-800-537-8484 for additional warranty claim details and procedures.

### What are the Limitations and Exclusions of this Warranty?

**Warranty Limitations:** This warranty is subject to the limitation set forth above. In addition, this warranty is made to the original purchaser only and is effective only if items are purchased from one of our authorized dealers. This warranty is not transferable. For warranty replacements based on warranty claims submitted within ninety (90) days of purchase, we will not be responsible for charges associated with shipments outside continental North America at any time or for any reason.

**Warranty Exclusions:** This warranty is subjected to the exclusions set forth above. In addition, the following are excluded from coverage under this warranty: any item used for commercial, contract or any other non-residential purpose; clearance items, display models or items purchased "as is"; freight damage; items subject to misuse, abuse, neglect or lack of proper care or maintenance (including without limitation as provided in any "care and maintenance guide" or similar information we provide); normal wear and tear; damage caused by acts of nature, acts of force majeure, vandalism, fire or other causality, or improper assembly; hardware against corrosion or rusting; purchased or replacement parts; and all plastic parts. Also excluded are loss of use or time; inconvenience; money; travel; packaging; or incidental, special or consequential damages of any kind. Replacement of defective items or parts as provided herein shall constitute your sole and exclusive remedy for items which are not as warranted. In no event shall our responsibility exceed the purchase price of the item found to be other than as warranted. This warranty is the exclusive statement of your rights with respect to items you have purchased and supersedes any other express warranty or statement, written or oral, made in connection with the purchase and sale of such items. The term "item" when used herein in the singular refers to the specific piece found to be defective, and not to the entire set of which the item is a part.

Some states do not allow exclusion or limitation of incidental or consequential damage, so that limitation may not apply to you. This warranty gives you specific legal rights, and you may also have other rights that vary from state to state.



## Pre-Assembly


### PLANNING ASSEMBLY

To prevent damage, place all parts on a soft surface during assembly  
Remove all protective materials before beginning assembly. It takes about 90 minutes for two people to complete all the assembly.

### HARDWARE INCLUDED



**NOTED:** Hardware not shown to actual size.

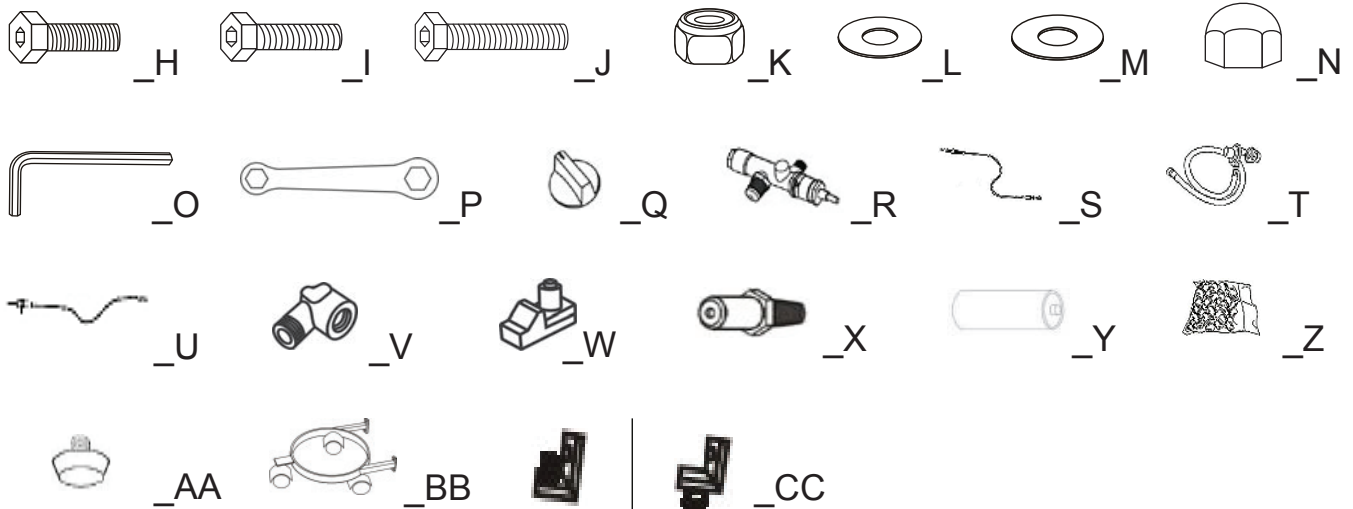



## Pre-Assembly


Part	Description	Size	QTY.
H	1/4" X 15MM BOLT	HW0814	6
I	1/4" X 18MM BOLT	HW0806	4
J	1/4" X 40MM BOLT	HW0812	4
K	NUTS	HW0717	2
L	Ø6.5 X 1.0 MM WASHER	HW0004	12
M	Ø18 X Ø6.5 X 1.5 MM WASHER	HW0712	4
N	BOLT COVER	HW0442	10
O	HEX BOLT DRIVER	HW0006	1
P	HEX WRENCH	HW0009	1
Q	CONTROL KNOB	FP0245	1
R	GAS VALVE	FP0307	1

Part	Description	Size	QTY.
S	THERMOCOUPLE	FP0004	1
T	LP REGULATOR HOSE	FP0308	1
U	ELECTRODE	FP0003	1
V	ORIFICE ELBOW	FP0310	1
W	IGNITION MODULE	FP0006	1
X	PROPANE ORIFICE	FP0312	1
Y	"AAA"BATTERY(1.5V)	HW0705	1
Z	FIRE ICE SET	FP1078	1
AA	FOOTCAP	FC0553	4
BB	LP SUPPORT	FP0675	1
CC	BOTTOM TOP CONNECTOR	FP0677/FP0678	1


## Pre-Assembly(continued)

### Package Contents


A




C




E




B

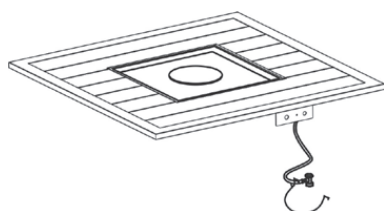

D



F




G



PART	DESCRIPTION	QUANTITY
A	BURNER COVER	1
B	FIREPIT TABLE TOP	1
C	BACK PANEL	1
D	LEFT SIDE PANEL	1
E	RIGHT SIDE PANEL	1
F	DOOR PANEL	1
G	MIDDLE SUPPORT	1



### Safety Information



EVERY BOLT NEEDS TO BE USED WITH A WASHER.

# Assembly Instructions

1. Identify parts packed in carton against the parts list. Remove all protective materials and set parts on a flat, non-abrasive surface.

2. Attach the back panel to side panels by using four 1/4"x40 mm bolts and washers (L) as shown in Figure 2. Guide bolts through holes in back panel, into pre-drilled holes in the side panels. **Hand tighten only.**

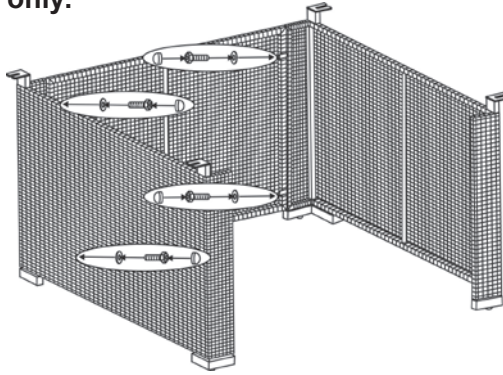


Figure 2

3. Attach the middle support to side panels by using four 1/4"x15 mm bolts and washers (L) as shown in Figure 3. Guide bolts through holes in middle support, into pre-drilled holes in the side panels. **Hand tighten only.**

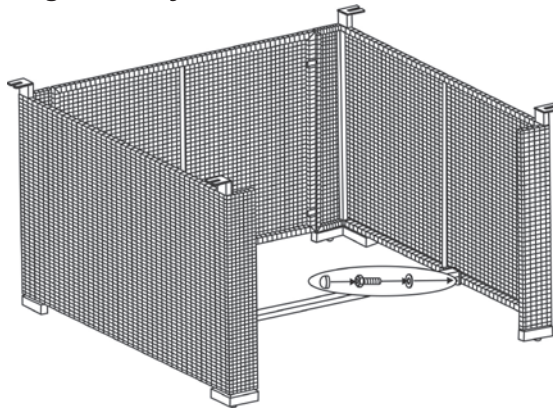


Figure 3

4. Identify the door panel and right side panel. Attach the door panel to the right side panel as shown in Figure 4.

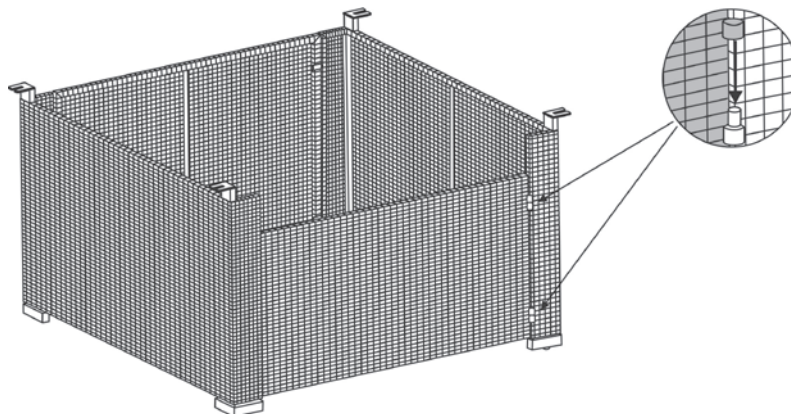


Figure 4

## Assembly Instructions

5. With the help of another person, carefully place the table top onto the table base. After making any necessary adjustments to the alignment of the table top and the assembled base, use four 1/4"x15 mm bolts and washers (M) as shown in Figure 5. Guide the bolts through the holes under the table top, into the pre-drilled holes in the side panels. **Do not tighten completely.**

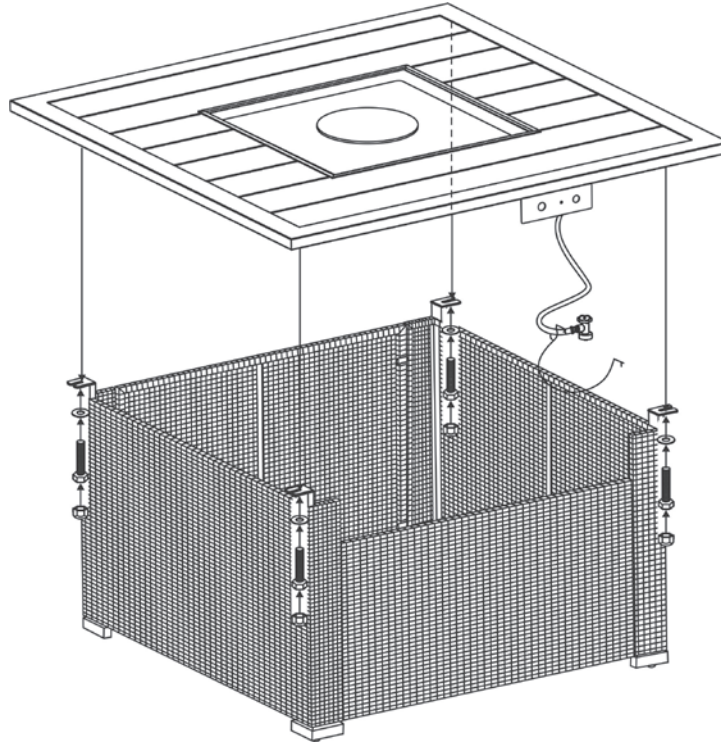


Figure 5

6. Attach the LP support to door panel by using four 1/4"x15 mm bolts and washers (L) as shown in Figure 6. **Do not over tighten.**

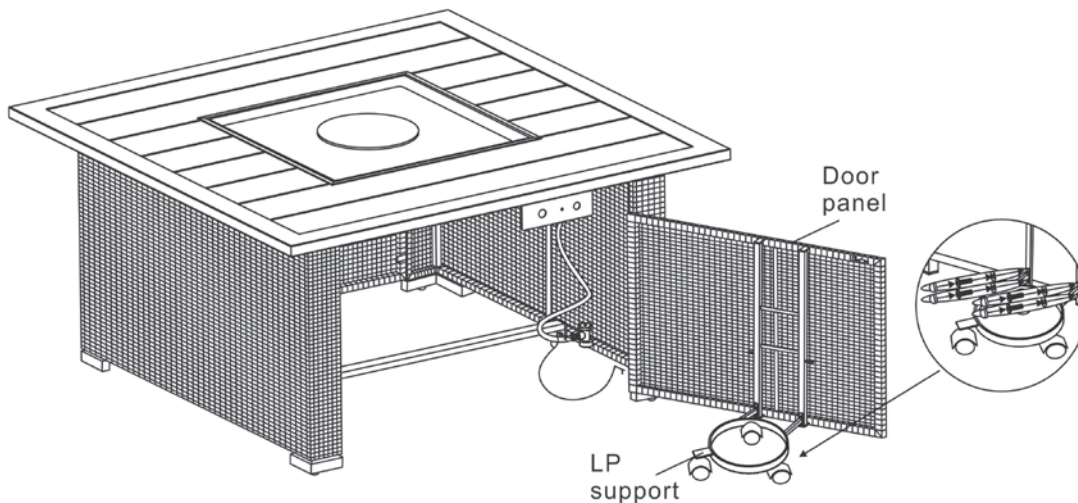


Figure 6



# Assembly Instructions

7. Place gas tank onto the LP support as shown in Figure 7.

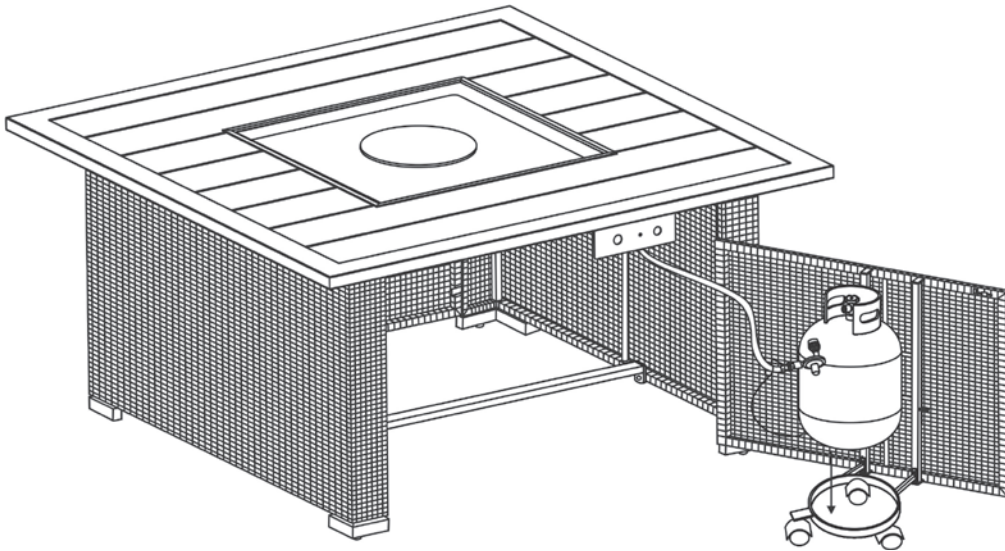


Figure 7

8. Attach the metal ring ( as shown in Figure 8) pre-fitted with gas hose which is connected to the table top , into the hole of the door panel, then use hex bolt driver to screw 1/4"x5mm nut , the gas tank has fixed as shown in Figure 8a. Connect the regulator as shown in Figure.9 Screw the black handle clock-wise to tighten. Turn the handle counter clock-wise to remove. The hose must point down. Check that the valve is turned all the way clockwise to the "OFF" position.

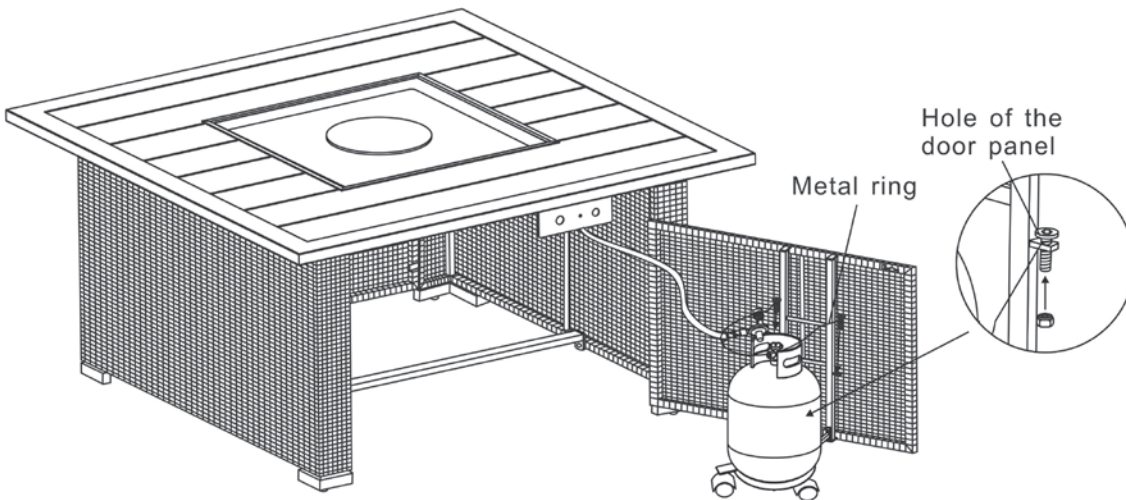


Figure 8

Figure 8a

# Assembly Instructions

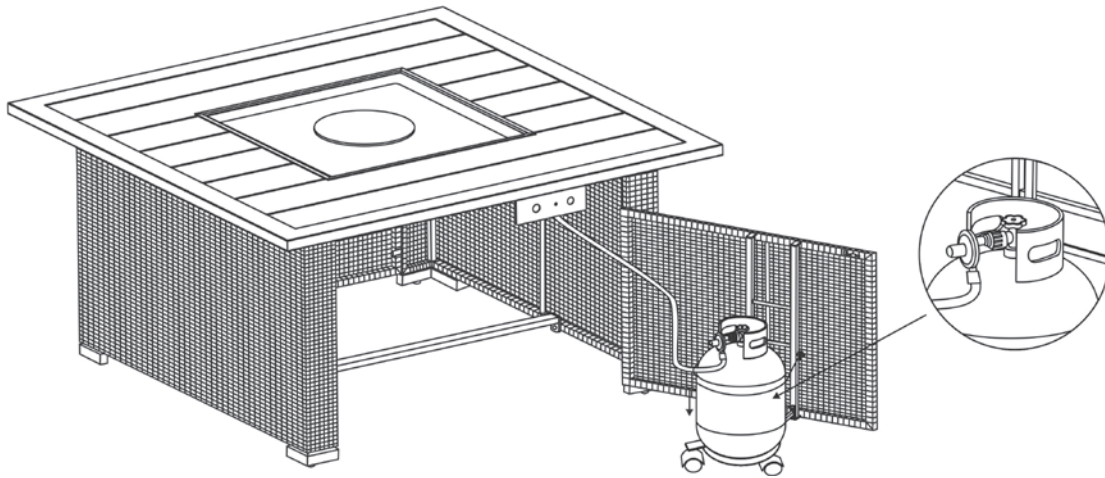


Figure 9

9. After making any necessary adjustments to the parts, use the hex bolt driver to tighten all bolts.

Note: each bolt must be tightened a few revolutions at a time.

Repeat until all bolts are tight. Do not over tighten. Over tightening may strip bolts. Cover all bolts with covers.

10. Pour the lava rocks into the burner pan completely covering the burner. See Figure 10.

**Burner Pan**

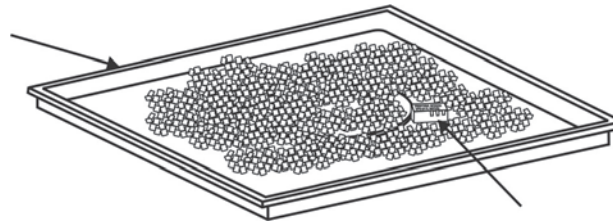


Figure 10

**Ignition Well**

11. Remove the cardboard cover from the ignition well as shown in Figure 11.

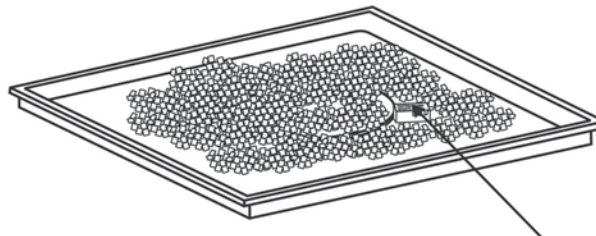


Figure 11


**Cardboard Cover**

## Assembly Instructions

---

12. Open the tank valve. Apply a solution of soapy water to the tank-regulator connection and to the valve-hose connection to check for leaks as shown in Figure 12. If soap bubbles continue to form, the connection has a leak. If a leak is found, close the tank valve and tighten all connections.

**NOTE: NEVER USE A FLAME TO CHECK FOR LEAKS.**

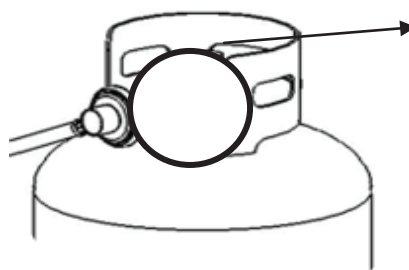

Checking the tank-regulator for leaks

Figure 12





CUSTOMER SERVICE DEPT: 1337 TAYLOR FARM ROAD,  
SUITE 100, VIRGINIA BEACH, VA 23453-3142  
FAX: (757) 368-0576  
CUSTOMER SERVICE NOT LINE: 1-800-416-3511  
SERVICE HOUSE: MONDAY-FRIDAY 9:00AM-5:00PM (EASTERN TIME)  
E-MAIL: [customerservice@va-cs.com](mailto:customerservice@va-cs.com)

sears

Please refer to part numbers when reordering

For questions or comments about product:

Email: [www.agio-usa.com](http://www.agio-usa.com) or Call toll-free: 1-800-416-3511

Made in / Hech en CHINA

Distributed by Sears, Roebuck and Co., Hoffman Estates, IL 60179  
[sears.com](http://sears.com)

See our extensive assortment of outdoor living products  
on-line at [www.sears.com](http://www.sears.com) and [www.kmart.com](http://www.kmart.com)