

Warranty

This product is warranted to the retail consumer for 90 days from date of retail purchase, against defects in material and workmanship.

WHAT IS COVERED

- Replacement parts and labor.
- Transportation charges to customer for the repaired product.

WHAT IS NOT COVERED

- Commercial or industrial use of this product.
- Damage caused by abuse, accident, misuse, or neglect.
- Transportation of the unit or component from the customer to Koolatron.

IMPLIED WARRANTIES

Any implied warranties, including the implied warranty of merchantability are also limited to duration of 90 days from the date of retail purchase.

WARRANTY REGISTRATION

Register on-line at www.koolatron.com AND keep the original, dated, sales receipt with this manual.

WARRANTY AND SERVICE PROCEDURE

If you have a problem with your unit, or you require replacement parts, please telephone the following number for assistance: **1-800-265-8456**

A Koolatron Master Service Centre must perform all warranty work. Service after warranty may be obtained at a Master Service Centre or at an authorized service dealer. Purchase Receipt is required to establish warranty eligibility.

Koolatron has Master Service Centres at these locations:

U.S.A.

4330 Commerce Dr.
Batavia, NY 14020-4102

Canada

139 Copernicus Blvd.
Brantford, ON N3P 1N4



50-bottle DUAL ZONE WINE CELLAR



www.koolatron.com

©2017 Koolatron, Inc. All rights reserved.

All specification are subject to change without notice.

H1S255

10/2017-v1

WC50
User Manual

FEATURES

This fifty-bottle wine cooler is designed to accept 25 oz liq. (750 ml) bottles up to 12.5" (315mm) tall. The temperature settings are between 45°F and 64°F (7°C and 18°C). Temperature selection, °F or °C, switchable. Interior light operated by external button.

SPECIFICATIONS

| | |
|---------------------|--|
| Power Requirements: | AC 120V 60Hz 110W |
| Capacity: | 50 x 750 ml (25.4 oz) bottles |
| Max. Temp.: | 18°C +/- 3°C (64°F +/- 5°F) at 22°C (72°F) ambient air temp. |
| Min. Temp.: | 7°C +/- 3°C (45°F +/- 5°F) at 22°C (72°F) ambient air temp. |
| Weight: | 43.65 kg (96.24 lbs) |

SAFETY

- Household Use Only.
- This unit is an indoor appliance. DO NOT use OUTDOORS.
- There must be at least 5" (127 mm) clearance around the unit to ensure proper ventilation.
- Place unit on a flat surface, away from heat sources
- Do not use the appliance if the plug or cable is damaged. If the power cord is damaged and/or is malfunctioning, please contact the manufacturer.
- Pull the plug out of the outlet to disconnect. DO NOT pull the cord.
- Do not touch the plug with wet hands.
- Never clean appliance parts with flammable fluids. Do not store or use gasoline or any other flammable vapors and liquids in the vicinity of this or any other appliance. The fumes can create a fire hazard or explosion.
- Unplug the appliance when not in use.

Use of extension cords


Because of potential safety hazards under certain conditions, we strongly recommend against the use of an extension cord. However, if you must use an extension cord, it is absolutely necessary that it is a UL-listed (in the United States) or a CSA-listed (in Canada), 3-wire grounding type appliance extension cord having a grounding type plug and outlet and that the electrical rating of the cord is 15 amperes (minimum) and 120 volts.

INSTALLATION

- Choose a location where there is an electrical outlet within reach of the power cord. There must be at least 5" (127 mm) clearance around the unit to ensure proper ventilation. Avoid locations in direct sunlight, moist or extreme cold areas.
- Before connecting the appliance to the power source, let it stand upright for approximately 2 hours. This will reduce the possibility of a malfunction in the cooling system from handling during transportation.
- Clean the interior surface with lukewarm water using a soft cloth.

OPERATING INSTRUCTIONS

The preset temperature at the factory is 50°F (10°C) and it will show on the display when you press the UP and DOWN buttons for the first time. The wine cooler should be placed where the ambient temperature is between 59° to 77°F (15 to 25 °C). If the ambient temperature is above or below this range, the performance of the unit may be affected. For example, placing your unit in extreme cold or hot conditions may cause interior temperatures to fluctuate.

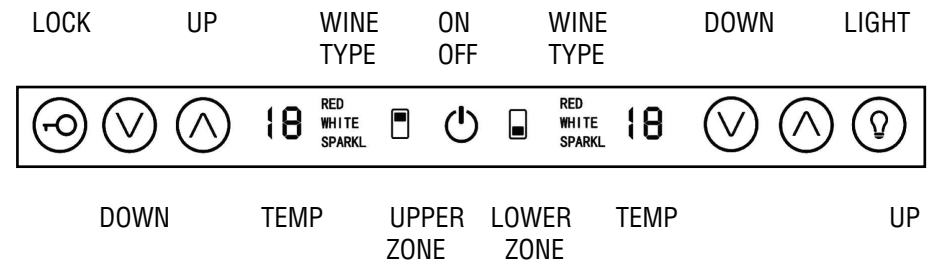

- To turn ON/OFF the appliance, press the ON/OFF button.
- The temperature preset at the factory is 50°F (10°C).
- You can turn the interior light on or off by pushing the 'LIGHT' button.
- Make sure the unit is unlocked. The lock/unlock key - When you press and hear 2 short "beeps" this means that the board is locked if you press the 'LOCK' for one second and hear a long "beep" the board will unlock.
- This unit has the option to display temperatures in either Celsius or Fahrenheit. To change the setting of the unit from °F to °C (or vice versa) press simultaneously the 'ON/OFF' and 'LOCK' buttons for 3 seconds.
- Set the desired cooling temperature by pressing the button 'UP' or 'DOWN' to set your desired temperature. Each depression of the buttons will scroll through the available temperature settings in increments of 1 degree.
- For sparkling wine the temperature should be set between 45°-47° F (7°-8 °C)
- For white wine the temperature should be set between 48°-54° F (9°-12 °C)
- For red wine the temperature should be set between 55°-65° F (13°-18 °C)

NOTES

- If the unit is unplugged, power loss, or turned off, you must wait 3 to 5 minutes before restarting. If you attempt to restart before this interval the Wine Cooler will not start.
- When you use the wine Cooler for the first time or restart the wine Cooler after having been shut off for a long time, there could be a few degrees variance between the temperature you select and the one indicated on the LED readout. This is normal and it is due to the length of the activation time. Once the wine Cooler is running for a few hours everything will return to normal.
- The zone temperature may have a difference of +/- 5°F (+/- 3°C) from setting depending on loading and ambient conditions.

WARNING

Be careful when using the touch screen panel. Please protect the panel carefully to avoid scratches, and maintain far away from strong magnetic field and high humidity areas, these conditions may prevent the wine cooler from working properly.

MAINTENANCE

CLEANING YOUR WINE COOLER

- Turn off the power, unplug the appliance, and remove all items including shelves and rack.
- Wash the inside surfaces with warm water and baking soda solution. The solution should be about 2 tablespoons of baking soda with a quart of water.
- Wash the shelves with a mild detergent solution.
- Wring excess water out of the sponge or cloth when cleaning area of the controls, or any electrical parts.
- Wash the outside cabinet with warm water and mild liquid detergent. Rinse well and wipe dry with a clean soft cloth.

POWER FAILURE

Most power failures are corrected within a few hours and should not affect the temperature of your appliance if you minimize the number of times the door is opened. If the power is going to be off for a longer period of time, you need to take the proper steps to protect your contents.

VACATION TIME

- Short vacations: Leave the Wine Cooler operating during vacations of less than three weeks.
- Long vacations: If the appliance will not be used for several months, remove all items and turn off the appliance. Clean and dry the interior thoroughly. To prevent door and mold growth, leave the door open slightly: blocking it open if necessary.

MOVING YOUR WINE COOLER

- Remove all items.
- Securely tape down all loose items (shelves) inside your appliance.
- Turn the adjustable leg up to the base to avoid damage.
- Tape the door shut.
- Be sure the appliance stays secure in the upright position during transportation. Also protect the outside of the appliance with a blanket, or similar item.

ENERGY SAVING TIPS

The Wine Cooler should be located in the coolest area of the room, away from heat producing appliances, and out of the direct sunlight.

TROUBLESHOOTING GUIDE

You can solve many common appliance problems easily, saving you the cost of a possible service call. Try the suggestions below to see if you can solve the problem before calling the servicer.

| PROBLEM | POSSIBLE CAUSE |
|---|---|
| Appliance does not operate. | Not plugged in. The circuit breaker tripped or a blown fuse. |
| Appliance is not cold enough. | Check the temperature control setting. External environment may require a higher setting. The door is opened too often. The door is not closed completely. The door gasket does not seal properly. |
| Turns on and off frequently. | The room temperature is hotter than normal. The door is opened too often. The door is not closed completely. The temperature control is not set correctly. The door gasket does not seal properly. |
| The light does not work. | Not plugged in. The circuit breaker tripped or a blown fuse. The bulb has burned out. The switch is in the "OFF" position. |
| Vibrations. | Check to assure that the appliance is level. |
| The appliance seems to make too much noise. | The rattling noise may come from the flow of the refrigerant, which is normal. As each cycle ends, you may hear gurgling sounds caused by the flow of refrigerant in your appliance. Contraction and expansion of the inside walls may cause popping and crackling noises. The appliance is not level. |
| The door will not close properly. | The appliance is not level. The door was reversed and not properly installed. The gasket is dirty. The shelves are out of position. |